

PJ.02-W2-14.2 SPR- INTEROP/OSED Part I - Final

Deliverable ID:	D4.2.002
Dissemination Level:	PU
Project Acronym:	AART
Grant:	874477
Call:	H2020-SESAR-2019-1
Topic:	SESAR-IR-VLD-WAVE2-03-2019 PJ.02 W2 Airport airside and runway throughput
Consortium Coordinator:	EUROCONTROL
Edition Date:	18 January 2023
Edition:	00.01.02
Template Edition:	02.00.06

Authoring & Approval

Authors of the document

Beneficiary	Date
EUROCONTROL	August 2020 to January 2023

Reviewers internal to the project

Beneficiary	Date
EUROCONTROL	January 2023

Reviewers external to the project

Beneficiary	Date
None	

Approved for submission to the S3JU By - Representatives of all beneficiaries involved in the project

Beneficiary	Date
EUROCONTROL	18/01/2023

Rejected By - Representatives of beneficiaries involved in the project

Beneficiary	Date
None	

Document History

Edition	Date	Status	Beneficiary	Justification
00.00.01	26/05/2021	Draft	EUROCONTROL	First version from PJ02-02 document
00.01.00	03/06/2022	Draft	EUROCONTROL	Final for SJU quality check
00.01.01	25/08/2022	Final	EUROCONTROL	Final version for Data Pack
00.01.02	18/01/2023	Final	EUROCONTROL	Final version for Data Pack taking into account comments from maturity gate

Copyright Statement © 2023 – EUROCONTROL. All rights reserved. Licensed to SESAR3 Joint Undertaking under conditions.

AART

AIRPORT AIRSIDE AND RUNWAY THROUGHPUT

This Operational Service and Environment Definition is part of a project that has received funding from the SESAR3 Joint Undertaking under grant agreement No 874477 under European Union's Horizon 2020 research and innovation programme.



Abstract

This Operational Service and Environment Definition Document provides the description of the following Operational Improvement developed in the solution PJ.02-W2-14.02 Second Runway Aiming Point (SRAP):

- AO – 0319 - Enhanced Arrival procedures using Second Runway Aiming Point (SRAP)

It presents the Safety, Performance and Interoperability requirements for ground based ATC systems and aircraft systems, identified during the validation exercises.

In addition, it explains the methodology used to determine the separations to apply between aircraft, following or not the SRAP procedures.

Table of Contents

Abstract	3
1 Executive Summary	9
2 Introduction.....	10
2.1 Purpose of the document	10
2.2 Scope.....	10
2.3 Intended readership.....	10
2.4 Background.....	10
2.5 Structure of the document	11
2.6 Glossary of terms	12
2.7 List of Acronyms.....	12
3 Operational Service and Environment Definition	17
3.1 SESAR Solution PJ.02-W2-14.2: a summary	17
3.1.1 Deviations with respect to the SESAR Solution(s) definition	18
3.2 Detailed Operational Environment	19
3.2.1 Operational Characteristics	19
3.2.2 Roles and Responsibilities.....	20
3.2.3 CNS/ATS description	20
3.2.4 Applicable standards and regulations.....	21
3.3 Detailed Operating Method	21
3.3.1 Previous Operating Method	21
3.3.2 New SESAR Operating Method	23
3.3.2.1 Use Cases for [NOV-2] Enhanced Approach Operations.....	23
3.3.2.1.1 [NOV-5][EAO-02] SRAP Published Approach	23
3.3.2.1.2 [NOV-5][SRAP-Non-Nominal-01] Missed Approach (Pilot Initiated) / Go-Around Management.....	31
3.3.2.1.3 [NOV-5][SRAP-Non-Nominal-02] Procedure for Glide Alert Management	34
3.3.2.1.4 [NOV-5][SRAP-Non-Nominal-03] Loss of TBS-ORD separation indicators.....	35
3.3.3 Differences between new and previous Operating Methods.....	38
4 Safety, Performance and Interoperability Requirements (SPR-INTEROP).....	41
5 References and Applicable Documents	80
5.1 Applicable Documents.....	80
5.2 Reference Documents	81
Appendix A Cost and Benefit Mechanisms	83
A.1 Stakeholders identification and Expectations.....	83
A.2 Benefits mechanisms.....	85
A.2.1 Ground benefits mechanisms.....	85
A.2.2 Airside Benefits Mechanisms.....	88
A.3 Costs mechanisms	90
Appendix B Description of SRAP Operations	97

72	Appendix C	Separation design for SRAP.....	98
73	C.1	Risk assessment methodology	98
74	C.2	LiDAR data description and processing.....	99
75	C.3	Navigation uncertainty	100
76	C.3.1	Wake separation design for leader on ILS	100
77		IGE assessment methodology	100
78		IGE Results	103
79		Cat-B leaders	105
80		Cat-C leaders	110
81		Extension for Cat-A leaders	114
82		Extension for Cat-D leaders.....	114
83		Extension for Cat-E leaders	116
84		Extension for Cat-F leaders	117
85		OGE assessment methodology.....	119
86	C.3.2	Wake separation design methodology with leader on SRAP.....	120
87		IGE assessment methodology	121
88		OGE assessment methodology.....	121
89		OGE assessment results.....	123
90	C.3.3	Wake separation summary	126
91	Appendix D	SRAP wake separation minima calculator	127
92			
93	List of Tables		
94	Table 1:	Glossary of terms	12
95	Table 2:	List of acronyms	16
96	Table 3:	SESAR Solution PJ.02-W2-14.2 Scope and related OI steps.....	18
97	Table 4:	Stakeholders' expectations	84
98	Table 5:	Circulation thresholds corresponding to RMC=0.08 for each RECAT-EU category pair	102
99	Table 6:	Allowed time separation minima [s] behind Cat-B depending on ΔH value and for various	
100	followers		110
101	Table 7:	Allowed time separation minima [s] behind Cat-C depending on ΔH value and for various	
102	followers		113
103	Table 8:	Allowed time separation reduction [s] behind Cat-A depending on ΔH value and for various	
104	followers		114
105	Table 9:	Allowed time separation minima [s] behind Cat-D depending on ΔH value and for Cat-F	
106	followers		116
107	Table 10:	Allowed time separation minima [s] behind Cat-E depending on ΔH value and for Cat-F	
108	followers		117
109	Table 11:	Allowed time separation minima [s] behind Cat-F depending on ΔH value and for Cat-F	
110	followers		117
111	Table 12:	Maximum wake circulation [m^2/s] guaranteeing $\text{RMC} \leq 0.04$ for any leader-follower pair of	
112	the considered category and with the follower at final approach speed.....		122

113	Table 13: Vortex initial circulation, spacing and characteristic time per RECAT-EU category.....	123
114	Table 14: Wake time separation minima [s] for operation of leader on an upper glide and follower on	
115	a lower glide.....	123
116	Table 15: Wake separation minima modification for operation of SRAP in combination with	
117	conventional ILS procedure	126
118		
119	List of Figures	
120	Figure 1: Validations activities performed on SRAP in SESAR1 P06.08.08 and SESAR 2020 W1 PJ02-02	
121		11
122	Figure 2: NOV-5 for nominal cases	26
123	Figure 3: NOV-5 for missed approach/go-around management.....	32
124	Figure 4: NOV-5 for the glide alert management	34
125	Figure 5: NOV-5 for loss of separation indicators.....	36
126	Figure 6: SRAP procedure with one interception altitude	97
127	Figure 7: SRAP procedure with two interception altitudes	97
128	Figure 8: description of the two regions of wake evolution.....	99
129	Figure 9: schematic view of ILS and SRAP region of flight	101
130	Figure 10: schematic view of SRAP wake analysis for close to ground effect region.....	101
131	Figure 11: schematic view of baseline for SRAP wake analysis for close to ground effect region	102
132	Figure 12: Example of 5 tracks providing altitude (top) and circulation (bottom) evolution. Comparison	
133	of test case and baseline for baseline time of 120s, $\Delta H=10$ m and a time separation reduction of 30s.	
134	The blue (resp. magenta) circle indicates the circulation value considered for the baseline (resp. test	
135	case)	105
136	Figure 13: CCDF (RMC) for CAT-B-CAT-B with leader on ILS @ one wind span altitude and follower	
137	following SRAP DH=0 m above the ILS with various separation reductions compared to the baseline	
138	time separation (70 s)	105
139	Figure 14: CCDF (RMC) for CAT-B-CAT-C with leader on ILS @ one wind span altitude and follower	
140	following SRAP DH=30 m above the ILS with various separation reductions compared to the baseline	
141	time separation (100 s).....	106
142	Figure 15: CCDF (RMC) for CAT-B-CAT-C with leader on ILS @ one wind span altitude and follower	
143	following SRAP DH=45 m above the ILS with various separation reductions compared to the baseline	
144	time separation (100 s).....	106
145	Figure 16: CCDF (RMC) for CAT-B-CAT-D with leader on ILS @ one wind span altitude and follower	
146	following SRAP DH=45 m above the ILS with various separation reductions compared to the baseline	
147	time separation (100 s).....	107

148	Figure 17: CCDF (RMC) for CAT-B-CAT-D with leader on ILS @ one wind span altitude and follower following SRAP DH=65 m above the ILS with various separation reductions compared to the baseline time separation (100 s).....	107
151	Figure 18: CCDF (RMC) for CAT-B-CAT-E with leader on ILS @ one wind span altitude and follower following SRAP DH=45 m above the ILS with various separation reductions compared to the baseline time separation (120 s).....	108
154	Figure 19: CCDF (RMC) for CAT-B-CAT-D with leader on ILS @ one wind span altitude and follower following SRAP DH=65 m above the ILS with various separation reductions compared to the baseline time separation (120 s).....	108
157	Figure 20: CCDF (RMC) for CAT-B-CAT-F with leader on ILS @ one wind span altitude and follower following SRAP DH=30 m above the ILS with various separation reductions compared to the baseline time separation (180 s).....	109
160	Figure 21: CCDF (RMC) for CAT-B-CAT-F with leader on ILS @ one wind span altitude and follower following SRAP DH=65 m above the ILS with various separation reductions compared to the baseline time separation (180 s).....	109
163	Figure 22: CCDF (RMC) for CAT-C-CAT-C with leader on ILS @ one wind span altitude and follower following SRAP DH=5 m above the ILS with various separation reductions compared to the baseline time separation (70 s).....	110
166	Figure 23: CCDF (RMC) for CAT-C-CAT-D with leader on ILS @ one wind span altitude and follower following SRAP DH=5 m above the ILS with various separation reductions compared to the baseline time separation (70 s).....	111
169	Figure 24: CCDF (RMC) for CAT-C-CAT-E with leader on ILS @ one wind span altitude and follower following SRAP DH=15 m above the ILS with various separation reductions compared to the baseline time separation (100 s).....	111
172	Figure 25: CCDF (RMC) for CAT-C-CAT-E with leader on ILS @ one wind span altitude and follower following SRAP DH=25 m above the ILS with various separation reductions compared to the baseline time separation (100 s).....	112
175	Figure 26: CCDF (RMC) for CAT-C-CAT-F with leader on ILS @ one wind span altitude and follower following SRAP DH=25 m above the ILS with various separation reductions compared to the baseline time separation (150 s).....	112
178	Figure 27: CCDF (RMC) for CAT-C-CAT-F with leader on ILS @ one wind span altitude and follower following SRAP DH=45 m above the ILS with various separation reductions compared to the baseline time separation (150 s).....	113
181	Figure 28: CCDF(RMC) for CAT-C with leader on ILS @ one wind span altitude and follower following SRAP DH=15 m above the ILS with various separation reductions compared to the baseline time separation (120 s) and RMC threshold for Cat-D-Cat-F	115
184	Figure 29: CCDF(RMC) for CAT-C with leader on ILS @ one wind span altitude and follower following SRAP DH=30 m above the ILS with various separation reductions compared to the baseline time separation (120 s) and RMC threshold for Cat-D-Cat-F	115
187	Figure 30: CCDF(RMC) for CAT-C with leader on ILS @ one wind span altitude and follower following SRAP DH=15 m above the ILS with various separation reductions compared to the baseline time separation (100 s) and RMC threshold for Cat-E-Cat-F.....	116

190	Figure 31: CCDF(RMC) for CAT-C with leader on ILS @ one wind span altitude and follower following	
191	SRAP DH=25 m above the ILS with various separation reductions compared to the baseline time	
192	separation (100 s) and RMC threshold for Cat-E-Cat-F.....	117
193	Figure 32: CCDF(RMC) for CAT-C with leader on ILS @ one wind span altitude and follower following	
194	SRAP DH=5 m above the ILS with various separation reductions compared to the baseline time	
195	separation (70 s) and RMC threshold for Cat-F-Cat-F.....	118
196	Figure 33: CCDF(RMC) for CAT-C with leader on ILS @ one wind span altitude and follower following	
197	SRAP DH=10 m above the ILS with various separation reductions compared to the baseline time	
198	separation (70 s) and RMC threshold for Cat-F-Cat-F.....	118
199	Figure 34: schematic view of ILS and SRAP region of flight for OGE situation	119
200	Figure 35: schematic view of the wake vortex encounter area for wake generated on the ILS with a	
201	follower on SRAP for OGE situation.....	119
202	Figure 36: distribution of vortex vertical displacement after 90 s based on EGLL-OGE database	120
203	Figure 37: distribution of vortex vertical displacement after 120 s based on EGLL-OGE database ...	120
204	Figure 38: schematic view of SRAP and ILS region of flight	121
205	Figure 39: schematic view of SRAP and ILS region of flight	122
206	Figure 40: RWC wake decay evolution for Cat-A generated vortices OGE.....	124
207	Figure 41: RWC wake decay evolution for Cat-B generated vortices OGE	124
208	Figure 42: RWC wake decay evolution for Cat-C generated vortices OGE	125
209	Figure 43: RWC wake decay evolution for Cat-D generated vortices OGE.....	125
210	Figure 44: RWC wake decay evolution for Cat-E generated vortices OGE	126
211		

1 Executive Summary

This OSD/SPR/INTEROP document has the objective to provide the description of the operational concept for the "Second Runway Aiming Point" operations (SRAP).

It is based on, and updates the following SESAR PJ02 Wave 1 document:

- PJ02-02 OSD-SPR-Interop Part I, D2.1.01, 24 March 2020 [[37]]

The updates have been made following the validation activities performed in Wave 2, for solution PJ.02-W2-14.2. The outputs of these activities can be found in [41].

It is recognised that GBAS technology can easily support several approach paths and therefore may be considered as a valuable enabler.

Nevertheless, RNAV guidance will as well be considered because it is anticipated that most aircraft will be able to follow RNAV procedures, whereas only 25% of the fleet is expected to be GBAS-equipped in 2025.

2 Introduction

2.1 Purpose of the document

The OSD/SPR/INTEROP document is used as the basis for assessing and establishing operational, safety, environment, performance and interoperability requirements for the related systems further detailed in the Part II - Safety Assessment Report, Part III – Environment Assessment Report, Part IV – HP Assessment Report, Part V – Performance Assessment Report. This document identifies the operational services supported by several entities within the ATM community and includes the operational expectations of the related systems.

2.2 Scope

The OSD/SPR/INTEROP document covers the concept of operations for the Enhanced Arrival Procedures using a Second Runway Aiming Point (SRAP), AO-0319.

This procedure enables to reduce the environmental impact (e.g. noise, fuel). In addition, runway throughput may be increased (e.g. via optimisation of wake turbulence separations).

The OI AO-0319 has reached V3 on-going maturity level at the end of PJ02-02 in Wave 1 and the objective of PJ02 W2 14.2 is to bring it to full V3.

This OSD/SPR/INTEROP document develops the use cases for the OI, defines the Operational Requirements and captures expected performance in accordance with the performance framework.

2.3 Intended readership

This document is to support any Airspace Users, ANSPs, Airport Operations and Safety Regulators willing to develop and implement one or more of the proposed approach procedures.

2.4 Background

PJ02 W2 Solution 14.2 complements studies started in the frame of SESAR1 in projects P06.08.08 and continued in SESAR 2020 W1 PJ02-02.

The picture below shows the validation activities performed in P06.08.08 and PJ02-02 on OI AO-0319. Details on the outputs of PJ02-02 activities can be found in [38].

It has to be noticed that SRAP (Second Runway Aiming Point) operations replace SESAR1 P06.08.08 MRAP (Multiple Runway Aiming Points) procedure.

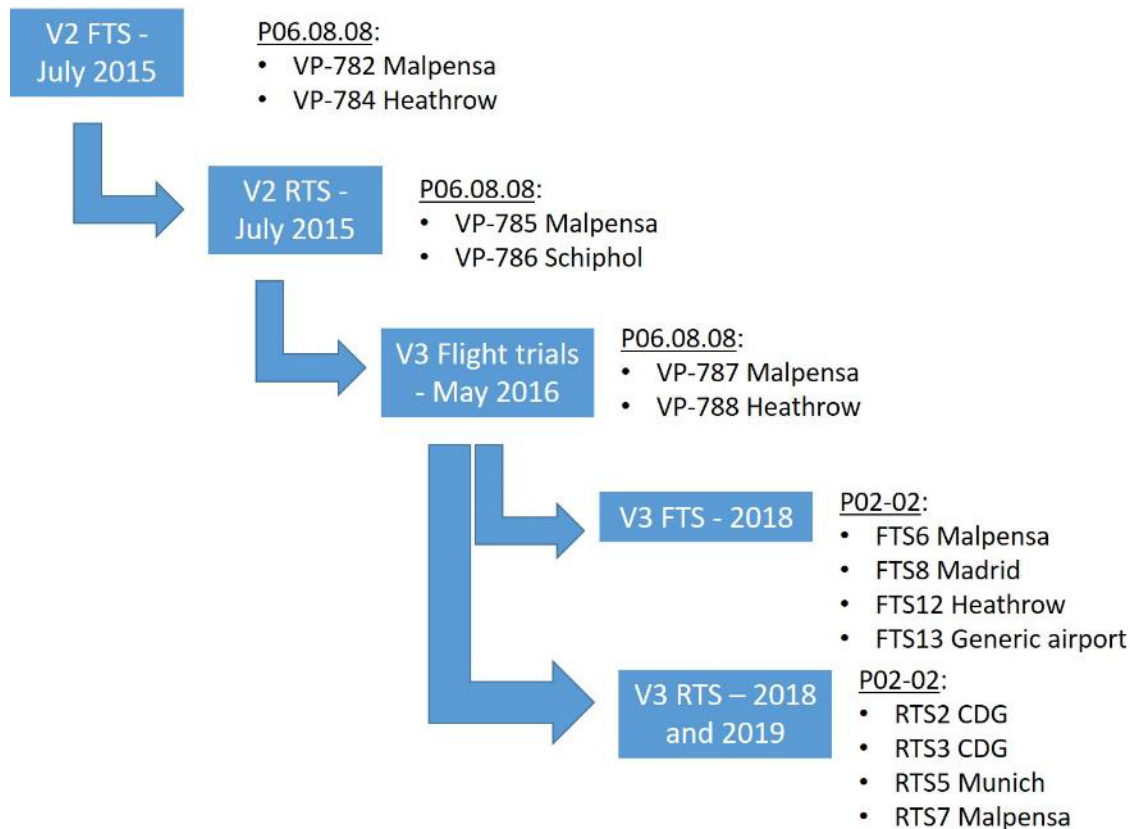


Figure 1: Validations activities performed on SRAP in SESAR1 P06.08.08 and SESAR 2020 W1 PJ02-02

The major recommendations from PJ02-02 [[38]] were:

- the need to consider the non-nominal situations, and in particular the loss of the ATC tool supporting the controllers in ensuring the needed separations between the aircraft approaching on standard and SRAP procedures.
- the need to consider go-arounds/missed approaches.
- the need to further evaluate the proposed runway marking and lighting solutions.

2.5 Structure of the document

The structure of the document is as follows:

1. Chapter 1: This section introduces the document.
2. Chapter 2: This section provides the document introduction, its scope, purpose, intended audience, background information as well as the glossary of terms and acronyms.
3. Chapter 3: This section gives a description of the detailed operating method and operational environment.
4. Chapter 4: This section provides the Safety and Performance Requirements (SPR) and Interoperability Requirements (INTEROP) that have been validated during validation activities at V3 level.

5. Chapter 5: This section lists the references and applicable documents used in producing this document SPR-INTEROP/OSED.
6. Appendix A: This section presents the cost and benefit mechanisms for SRAP procedures
7. Appendix B: This section provides a description of SRAP procedures
8. Appendix C: This section explains the separation design for SRAP
9. Appendix D: This section provides a wake separation minima calculator for SRAP

2.6 Glossary of terms

Term	Definition	Source of the definition
Enhanced arrival operations	Generic term referring in a general manner to all operational concepts developed in SESAR Wave 1 PJ02-02: IGS, A-IGS, SRAP, IGS-to-SRAP, C-SPR-ST. The current document concerns only SRAP.	Project definition
Obstacle Clearance Altitude/Height (OCA/H)	In a precision approach procedure, the OCA/H is defined as the lowest altitude/height at which a missed approach must be initiated to ensure compliance with the appropriate obstacle clearance design criteria	ICAO Doc 8168 PANS OPS
Autopilot / Flight Director	AP/FD means that both the Autopilot and the Flight Director are used by the flight crew. They are both driven by the guidance targets coming either from the FMS (FPLN follow up) or the flight crew itself (target selected on Auto Flight system Control Panel). The pilot does not touch the aircraft stick command. FD only means that the Flight Director is displayed and followed manually (using the stick command) by the flight crew on the Primary Flight Display. Without AP/FD means that the flight crew flies a pure manual final approach with the unique aid of lateral and vertical deviations displayed on the Primary Flight Display.	Project proposed definition

Table 1: Glossary of terms

2.7 List of Acronyms

Acronym	Definition
AIC	Aeronautical Information Circular
A-IGS	Adaptive Increased Glide Slope

AMC	Acceptable Mean of Compliance
ANP AR	Required Navigation Performance Authorization Required
ANSP	Air Navigation Service Provider
AO	Aerodrome Operations
AP	Auto Pilot
AP/FD	Autopilot / Flight Director
APOC	Airport Operations Centre
APP	Approach
ASAS	Airborne Separation Assistance System
ATC	Air Traffic Control
ATCO	Air Traffic Controller Operator
ATIS	Automatic Terminal Information Service
ATM	Air Traffic Management
ATS	Air Traffic Services
AU	Airspace Users
CCDF	Complementary Cumulative density Function
CNS	Communication, Navigation & Surveillance
CONOPS	Concept of Operations
CSPR-ST	Closely Space Parallel Runway - Staggered Thresholds
CWP	Controller Working Position
DA(H)	Decision Altitude/Height
DBS	Distance Based Separations
DCB	Demand and Capacity Balancing
DH	Decision Height
DT	Displaced Threshold
EAO	Enhanced Approach Operation
EASA	European Union Aviation Safety Agency
E-ATMS	European Air Traffic Management System

FD	Flight Director
FMS	Flight Management System
FPL	Flight Plan
GBAS	Ground-Based Augmentation System
GLS	GBAS Landing System
GNSS	Global Navigation Satellite System
HMI	Human Machine Interface
ICAO	International Civil Aviation Organization
IGE	In Ground Effect
IGS	Increased Glide Slope
IGS-to-SRAP	Increased Glide Slope to Second Runway Aiming Point
ILS	Instrument Landing System
INTEROP	Interoperability Requirements
IRS	Interface Requirements Specification
ITD	Initial Target Distance indicator
KPA	Key Performance Area
KPI	Key Performance Indicator
LOC	Localizer
MRAP	Multiple Runway Aiming Points
NavDB	Navigation Database
NM	Nautical Mile
OCA/H	Obstacle Clearance Altitude/Height
OFZ	Obstacle Free Zone
OGE	Out-of-Ground Effect
OI	Operational Improvement
OSD	Operational Service and Environment Definition
PAN	Precision Approach Navigator
PANS	Procedures for Air Navigation Service

PAPI	Precision Approach Path Indicator
PBN	Performance Based Navigation
QFU	Runway in use
RECAT-EU	European separation standard for aircraft wake turbulence
RET	Rapid Exit Taxiway
RMC	Rolling Moment Coefficient
RNAV	Area Navigation
RNP	Required Navigation Performance
ROT	Runway Occupancy Time
RTS	Real Time Simulation
RWC	Reasonable Worst Case
SBAS	Satellite-Based Augmentation System
SESAR	Single European Sky ATM Research Programme
SESAR Programme	The programme which defines the Research and Development activities and Projects for the SJU.
SJU	SESAR Joint Undertaking (Agency of the European Commission)
SJU Work Programme	The programme which addresses all activities of the SESAR Joint Undertaking Agency.
SOP	Standard Operating Procedure
SPR	Safety and Performance Requirements
SRAP	Second Runway Aiming Point
TBS	Time Based Separations
TMA	Terminal Manoeuvring Area
TS	Technical Specification
TSE	Total System Error
TTOT	Target Take Off Time
TWR	Tower
Vapp	Approach Speed
VASI	Visual Approach Slope Indicator

WVE	Wake Vortex Encounter
------------	-----------------------

279

Table 2: List of acronyms

3 Operational Service and Environment Definition

3.1 SESAR Solution PJ.02-W2-14.2: a summary

This Solution introduces the Second Runway Aiming Point (SRAP) as a new concept of enhanced approach operations. The distance between the second threshold and the nominal one is at least of 1100m.

SRAP increases the runway performance by using two active thresholds on a single runway.

By doing so, the environmental impact (e.g. noise, fuel) should be reduced. In addition, runway throughput may be increased (e.g. via optimization of ROT and/or wake turbulence separations).

The Solution is contributing to	
Key feature	High Performing Airport Operations
Essential Operational Change (EOC)	Airport and TMA performance
Capability	Arrival Sequencing Arrival Traffic Merging Arrival/Departure Routes Management Clearance/Instruction Management Optimised Descent Execution Optimised Take-Off / Landing Execution RNP based Operations Execution Separation Provision (airspace)

OI Step code	OI Step title (CR 06869 Update AO-0319 (following PJ.02-W2-14.2 V3 Gate))	OI Step coverage
AO-0319	Enhanced approach operations using a second runway aiming point (SRAP)	
Enhanced approach operations using a Second Runway Aiming Point (SRAP) will allow inbound aircraft reducing noise footprint impact in the surrounding areas of the airport and possibly runway occupancy time and/or taxi-in time, while also allowing potential increased runway capacity (via optimized wake separations). The SRAP concept is a published approach procedure, enabling aircraft to land on a second further runway aiming point (with associated runway ground markers, lights and visual aids). The SRAP procedure is designed with a glide slope parallel to the nominal one operated for the first aiming point. The distance between the second threshold and the nominal one is at least of 1100m.		

Choosing a SRAP approach (over the conventional one) could be the result of the best compromise between available runway length, preferential runway exit use, noise, wake turbulence separation constraints, and the runway occupancy time.

CR name	EN code	Title (EA Project)	Coverage
	AERODROME-ATC-102	Aerodrome ATC system to support final approach operations (distinguish approach procedures)	Required/Develop
	AERODROME-ATC-25	Aerodrome ATC system to support SRAP operations (separation delivery)	Optional/Develop
	AIRPORT-56	Runway marking, lighting and PAPI for SRAP/IGS-to-SRAP approach procedures	Required/Develop
	APP ATC 115	Approach ATC system to support SRAP operations (separation delivery)	Optional/Develop
	APP ATC 170	Approach ATC system upgraded to support approach procedure assignment	Required/Develop
	HUM-023	Flight Crew new role for handling SRAP approach	Required/Develop
	HUM-031	ATC new role for handling SRAP approach	Required/Develop

Table 3: SESAR Solution PJ.02-W2-14.2 Scope and related OI steps

3.1.1 Deviations with respect to the SESAR Solution(s) definition

There is no deviation.

3.2 Detailed Operational Environment

3.2.1 Operational Characteristics

Operational interactions per context (NOV-2)	Operating Environment
[NOV-2] Enhanced Approach Operations	APT-Large APT-Medium APT-Very Large; TA-High Complexity TA-Medium Complexity TA-Very High Complexity
Comment	
1/ Final Spacing It is assumed that SRAP is compatible with both current and future separation schemes such as Time Based Spacing. It is however worth noting that Enhanced separation minima, based on legacy ICAO wake turbulence categories or on RECAT-EU categories, are specified as a function of which approach the lead and follower aircraft are flying, as a function of the SRAP glideslope angle and of the distance between the conventional landing threshold and the displaced one. This, for example, may allow a safe separation minima reduction of up to 1.5 NM for some pairs like Lower Medium behind Upper Heavies, compared to the standard in-trail separation. 2/ Airport layout SRAP is applicable to any airport layout from single to multiple runways with simple or complex taxiway structures. However, the overall airport layout along with airport neighbourhood topography may bring constraints that will be determinant as part of the selection process for the implementation of SRAP (e.g. the lack of rapid runway exits [RET] or the runway length). 3/ Runway operating mode SRAP is applicable to both dependent and independent runways, mixed and segregated mode operations. 4/ En-Route/TMA Operations SRAP is applicable to any arrival traffic management operations (radar vectoring, PBN route structure, vertical instructions, Continuous Descent Operations, speed instructions, etc.) 5/ Traffic Mix SRAP is applicable to airports serving both SRAP capable and non-capable aircraft. Any aircraft wake category mix can be serviced. However, it is worth noting that, as anticipated on the near to medium term horizon, only a part of the traffic will be equipped with advanced satellite-based approach capability (e.g. GBAS or SBAS), some aircraft types from Medium or Light category group will however need to remain on the conventional approach in case SRAP relies on RNP APCH types. In order to apply the adequate separation minima for an arrival pair, the Approach and Tower ATCOs need to know which aircraft type are eligible to fly SRAP. 6/ Runway conditions SRAP is applicable regardless of the runway conditions.	

7/ Airspace consideration

SRAP is compatible with both high traffic density and low traffic density situations. SRAP will be conducted only in controlled airspace where separation is ensured (classes A, B, C, D and E, according to ICAO classification of airspaces).

3.2.2 Roles and Responsibilities

Node	Responsibilities
Aerodrome ATS	Performs all the aerodrome ATS operations. [RELATED ACTORS/ROLES] Runway controller, ground controller, etc.
En-Route/Approach ATS	Performs all the en-route and approach ATS operations. [RELATED ACTORS/ROLES] Executive controller, planning controller, etc.
Flight Deck	Performs all the on-board AU operations including flight execution/monitoring according to agreed trajectory, compliance with ATC clearances/instructions, etc. [RELATED ACTORS/ROLES] Flight Crew

Operational interactions per context (NOV-2)		Operating Environment
[NOV-2] Enhanced Approach Operations		APT-Large APT-Medium APT-Very Large TA-High Complexity TA-Medium Complexity TA-Very High Complexity
Node	Node instance	Node instance description
En-Route/Approach ATS	Approach Executive Control	Instance of En-Route/Approach ATS for the approach phase.
Flight Deck	Flight Deck	Instance of Flight Deck.
Flight Deck	Following Aircraft	
Aerodrome ATS	Tower Runway Control	Instance of Aerodrome ATS.

3.2.3 CNS/ATS description

Technical constraint	description
Airborne capabilities	1/ Navigation & guidance capabilities for approaches with vertical guidance (precision and APV)

	- All commercial aircraft are capable of ILS approaches. - Commercial aircraft may also be equipped for GLS (GBAS) or RNP APCH procedures (RNAV APV-Baro or LPV SBAS) approaches.
Ground capabilities	1/ Approach means - SRAP may be deployed at airports with any type of approach means supporting vertical guidance: GLS (GBAS) or RNP APCH procedures (RNAV APV-Baro or LPV SBAS), in addition of conventional approaches using the standard ILS. 2/ Glide slope angle of approaches with vertical guidance (precision and APV) - ILS glideslope can be configured to angles different from the standard 3°, but it can only provide a single angle. - GLS (GBAS) or RNP APCH procedures (RNAV APV-Baro or LPV SBAS) allow the provision of different glideslope angles for different approaches on the same runway QFU. 3/ Glideslope anchor point of approaches with vertical guidance (precision and APV) - ILS glideslope anchor point is associated to the physical position of the glideslope station, so it can only define a single anchor point. - GLS (GBAS) or RNP APCH procedures (RNAV APV-Baro or LPV SBAS) allow the provision of different anchor points for different approaches on the same runway QFU.

302

303 3.2.4 Applicable standards and regulations

304 The current existing regulations are applicable and may need evolution to cover SRAP:

- 305
- For the visual aids, including lighting, marking and PAPI:
 - 306 ○ AMC/GM to Aerodrome regulation EU 139/2014
 - 307 ○ ICAO Annex 14
 - 308 ○ AMC/GM to Common Requirements regulation EU 2020/469 Part-ATS.
 - 309 • For the SRAP procedure and phraseology, the current regulatory framework.

310 3.3 Detailed Operating Method

311 3.3.1 Previous Operating Method

312 In today's environment, most airports are providing approaches to a single threshold (per QFU) on the
 313 arrival runway, at a unique standard final approach slope (usually 3°).

314 From the Initial Approach Fix, when a precision approach is selected, aircraft fly instrument
 315 procedures that terminate with the final approach segment leading to a runway threshold along a
 316 glide slope. Whatever their size, their category and their performance, aircraft touch down in a range
 317 around the touchdown zone, where the glide slope is anchored.

318 Standard separations during the approach are applied by controllers with no particular aid for
319 separation monitoring. Also, most ATC display systems do not provide easy access to information
320 related to aircraft navigation capabilities (e.g. GBAS, SBAS).

321 Most popular CAT I precision approach procedures among Europe are based on ILS even if they can
322 be based on other means (e.g. GBAS, SBAS). For this reason, ILS CAT I precision approach procedures
323 are assumed as previous operating method of those enhanced approach operations.


324

325

3.3.2 New SESAR Operating Method

3.3.2.1 Use Cases for [NOV-2] Enhanced Approach Operations

The operational context view represents the interactions between the main actors involved in the PJ02-W2-14.2 Solution concept of operations.

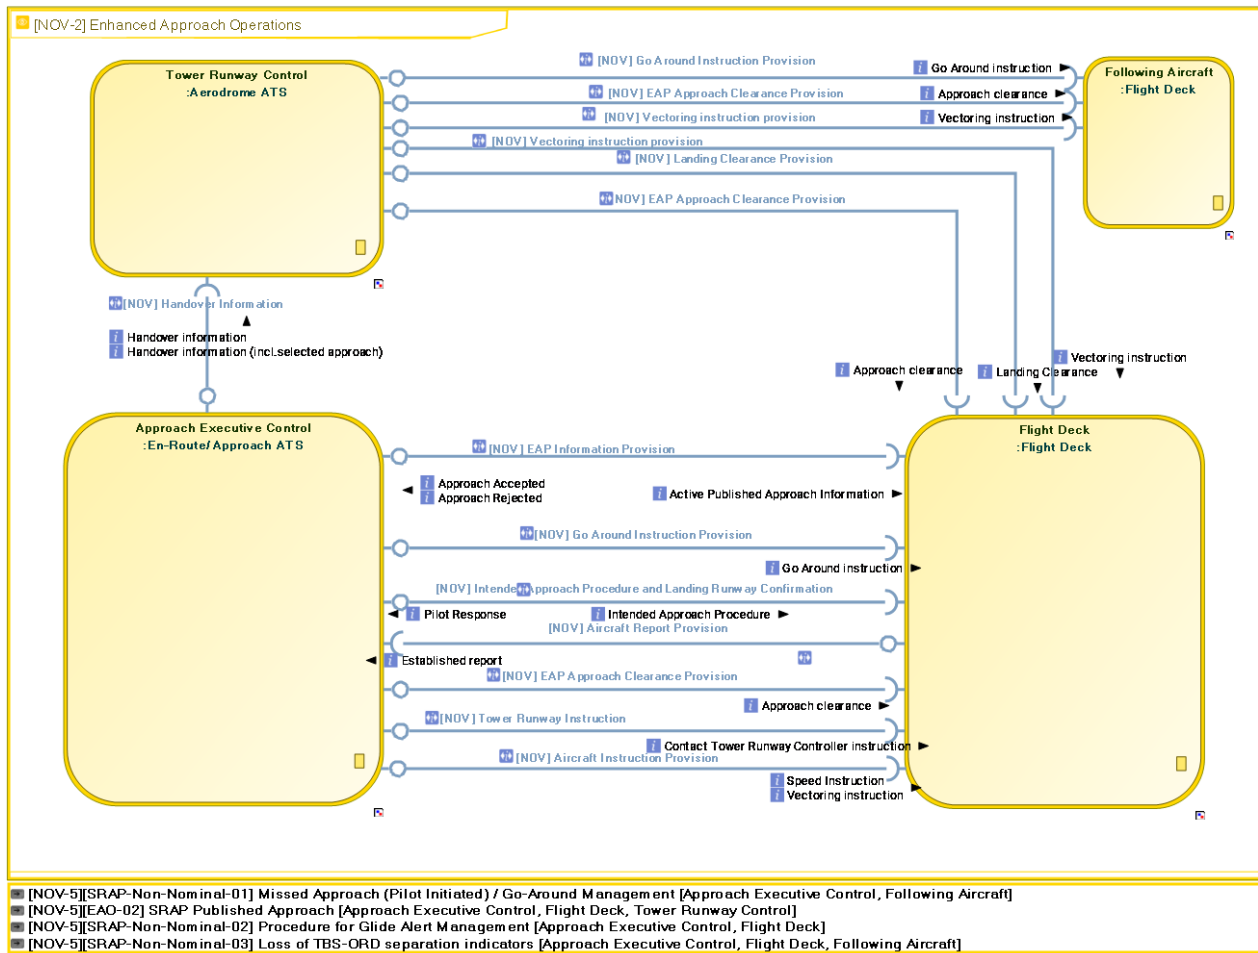

Click on http://webprisme.cfm.eurocontrol.int/oneportal_working_validation/data/diagrams/126A1498582345A6 for zooming.

Use case	[NOV-5][EAO-02] SRAP Published Approach
Use case	[NOV-5][SRAP-Non-Nominal-01] Missed Approach (Pilot Initiated) / Go-Around Management
Use case	[NOV-5][SRAP-Non-Nominal-02] Procedure for Glide Alert Management
Use case	[NOV-5][SRAP-Non-Nominal-03] Loss of TBS-ORD separation indicators

3.3.2.1.1 [NOV-5][EAO-02] SRAP Published Approach


The use case takes place in the execution phase. It describes how one flight performing a published Enhanced Approach Operation (EAO) as a Second Runway Aiming Point (SRAP) approach is integrated in a flow of traffic.

The use case starts when the flight enters the approach control area (taking into account that the Flight Deck has performed a "Prepare & Brief Approach" at the end of cruise), and is initiated following a request from Approach Executive Control and ends when the aircraft has landed.

Pre-conditions:

- The ANSP shall inform Airspace Users (e.g. via AIC) about the availability of SRAP procedure with their differences from the local conventional approaches (including applicable separation minima, location of the second aiming point, landing distance available etc.) The need for displaying to the Controllers the interception points respective for each procedure shall be evaluated as part of the local deployment, such that the visual references are operationally relevant and unambiguously presented without e.g. cluttering on the controller air surveillance display.
- ANSPs shall reinforce through a request to Aircraft Operators the need for Flight Plans to be complete and correctly filled with aircraft navigation capabilities.
- A single SRAP procedure type may be supported by different navigation guidance systems and part of or all the SRAP procedures may be active at the same time.
- The SRAP approach chart shall be specific to one final approach path (i.e. touchdown aiming point) and supporting navigation guidance mean. The position and color of the associated PAPI shall be indicated on the chart.
- SRAP procedures shall be published approach procedures flown based on ILS or GLS or RNP APCH with vertical guidance.
- The SRAP approach chart shall include altitude/distance information for the applicable runway aiming point to facilitate Flight Crew procedure check during the approach.
- When designing the SRAP local procedure and the location of the second threshold and aiming point, the current and future taxiway layout of the aerodrome shall be taken into consideration for facilitating runway vacation.
- When designing the SRAP local procedure, the location of the second runway aiming point shall provide sufficient landing distance available for all eligible aircraft at that specific airport.
- Contingency procedures shall be revised as appropriate to accommodate non-nominal modes or degraded modes of operations like the navigation guidance supporting an active procedure is no longer serviceable or the ATC separation support function is no longer serviceable (e.g. loss of separation distance indicator).
- Approach Supervision shall decide when a published SRAP becomes active/inactive for operations, considering the conditions for application are and remain met:
 1. No operational ATC & weather limitations
 2. Necessary navigation guidance means are serviceable.
- Approach / Tower Supervision shall inform the Approach / Tower Control about the list of active approach procedures.
- Information about a published SRAP being active to a given runway QFU shall be available to Flight deck in order to prepare expected approach briefing (e.g. via ATIS).
- SRAP Approach separation minima shall be specified for each combination of published approach procedure with different glideslopes, taking into account the associated navigation means and corresponding vertical accuracy around the published profile, for
 - Leader and follower on same glideslope
 - Leader upper glide - follower lower glide
 - Leader lower glide - follower upper glide.

- If the Runway Occupancy Time (ROT) is affected by landing on an active further runway aiming point, this ROT spacing shall be taken into account in the runway separation management (ROT might become the most constraining factor due to changes in separation minima).
- For high density operations supported by Separation Delivery Function with TDIs, when SRAP are flown based on RNP APCH navigation, there is a need for flexibility in final approach axis interception (e.g. using vectoring). In such cases, the ANSP shall request on the charts Flight Crew to inform Approach Controller when aircraft is unable to use FMS guidance for final approach axis interception.
- When the second runway threshold is not active (i.e. operating only the conventional threshold), the lightings of the secondary runway threshold and aiming point shall be switched off such as to avoid confusing Flight Deck.

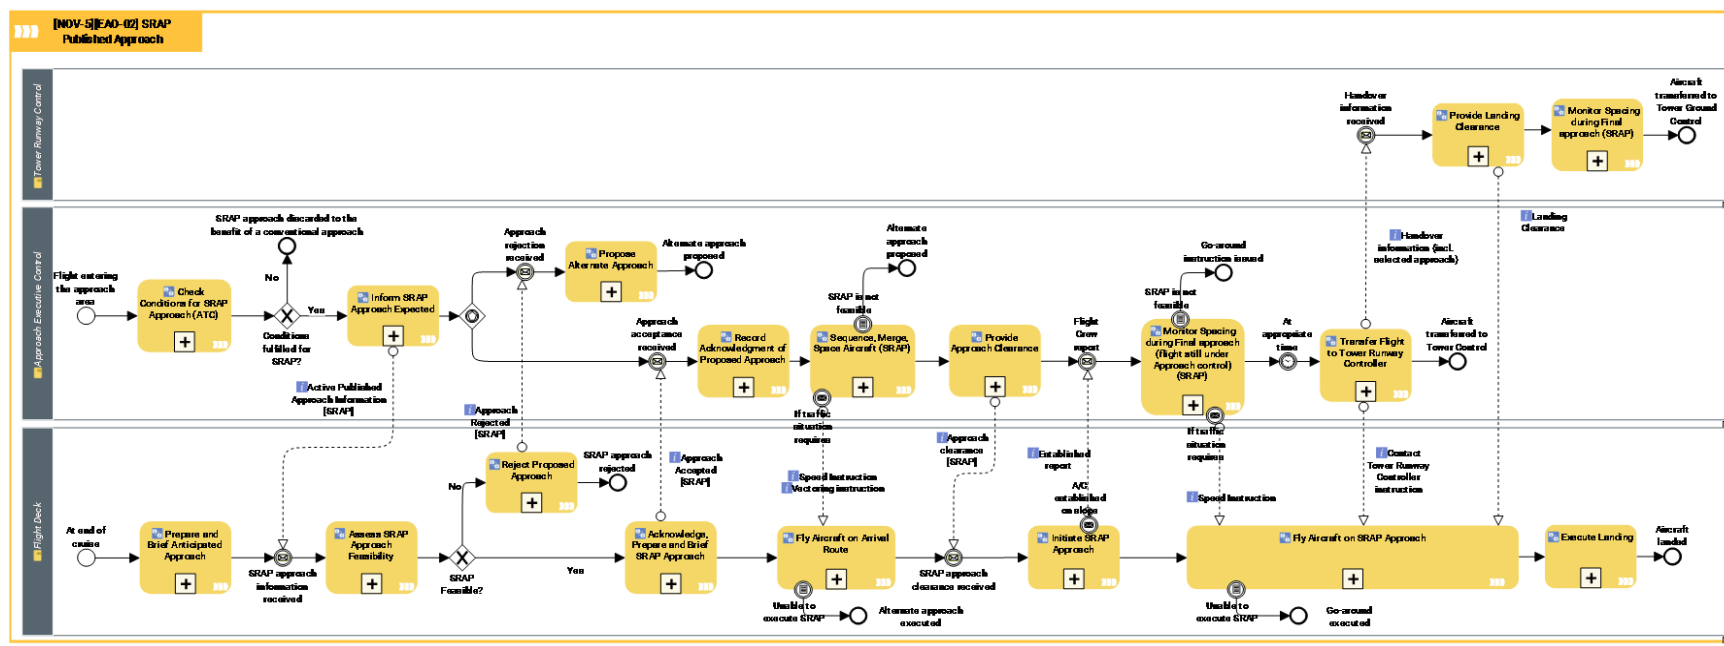

Activity	Description
Acknowledge, Prepare and Brief SRAP Approach	Upon proposal of a SRAP procedure by Approach Executive Control, the Flight Deck acknowledges it and immediately initiates the corresponding briefing to prepare the aircraft to fly the SRAP approach procedure, if not anticipated during approach preparation and briefing at the end of cruise.
Assess SRAP Approach Feasibility	The Flight Deck assesses the feasibility of the SRAP proposed by ATC, i.e.: Aircraft equipment that is necessary for this procedure is available, The proposed published procedure is already available on board, The Flight Deck is able to fly such approach Weather and Runway conditions and their impact on landing performance are compatible with and do not prevent the execution of such a procedure. The feasibility assessment is considered when receiving the expected approach information and then until the final approach is being flown.
Check Conditions for SRAP Approach (ATC)	Approach Executive Control determines whether a flight can be given an active SRAP published procedure based on: - aircraft declared navigation capabilities (assuming flight crew ability), - relevance of such a procedure for this flight in current traffic context (density, spacing management, etc.)
Execute Landing	The Flight Deck flies the visual segment after DH (if any) and safely executes landing on the runway.
Fly Aircraft on Arrival Route	The Flight Deck follows the arrival procedure or ATC instructions towards the final approach.
Fly Aircraft on SRAP Approach	The Flight Deck flies and monitors the lateral and vertical approach trajectory until reaching the decision height (DH). If distance/altitude information is provided on the chart, it can be used to perform distance/altitude checks. The Flight Deck continues managing aircraft energy and configuration following SOP to prepare aircraft for landing, while respecting potential ATC speed instructions as long as they are compatible with stabilization criteria. Meanwhile, the Flight Deck contacts Tower Runway Control when instructed to do so in order to receive landing clearance. When visual contact is established with the runway (at or before DH), the Flight Deck needs to properly identify visual references.
Inform SRAP Approach Expected	Approach Executive Control initiates the SRAP procedure informing the Flight Deck of the expected enhanced arrival approach.
Initiate SRAP Approach	Once the SRAP approach clearance has been received, the Flight Deck manages aircraft navigation as appropriate to capture the final approach lateral and vertical path.

	The Flight Deck also manages aircraft energy and configuration following SOP, while respecting procedure altitude and speed constraints, or ATC speed instructions if any. Once the aircraft is established on the final approach lateral and vertical path, the Flight Deck reports to ATC.
Monitor Spacing during Final approach (flight still under Approach control) (SRAP)	Approach Executive Control monitors the final approach (i.e. aircraft established on the glide slope), especially: - the spacing with aircraft ahead, providing speed instructions if traffic situation requires, and - the adherence to the approach altitude scheme [compliance to the assigned published final approach profile (i.e. interception of the correct glide and adherence to the glide path)]. A go-around procedure may be initiated if the conditions for a safe landing are not fulfilled.
Monitor Spacing during Final approach (SRAP)	Tower Runway Control monitors the final approach, especially: - the spacing with aircraft ahead, and - the adherence to the final approach altitude scheme. A go-around procedure may be initiated if the conditions for a safe landing are not fulfilled. Once the aircraft has landed and vacated the runway, Tower Runway Control transfers the flight to Tower Ground Control.
Prepare and Brief Anticipated Approach	The Flight Deck performs the following sub-tasks: • obtain weather and landing information for destination and alternate airports • check current aircraft approach and landing capabilities and performance against available airport means and weather conditions • insert anticipated arrival and approach procedures into the FMS and check them against published charts • insert relevant performance parameters for approach • insert landing minimum (DA/DH) • check/edit relevant performance parameters for go-around • check/perform tuning of relevant NAVAIDs • perform approach briefing If the airport operates an EAO approach, the Flight Deck also briefs the most likely EAO procedure.
Propose Alternate Approach	After the Flight Deck has rejected the proposed active EAO, Approach Executive Control takes this refusal into account and proposes and records the arrival flight another active approach.
Provide Approach Clearance	Approach Executive Control issues, at the appropriate time, and records the approach clearance corresponding to the published chart.

Provide Landing Clearance	At the appropriate time, the tower controller provides the landing clearance as well as the wind information. In front of a GBAS arriving aircraft, the runway is considered vacated as soon as the preceding aircraft passes the landing clearance line, which protects the OFZ (Obstacle Free Zone). In front of an ILS arriving aircraft, the runway is considered vacated as soon as the preceding aircraft passes the CAT III holding point, which protects the OFZ and the ILS sensitive area for the next arrival. For GBAS arrival the landing clearance can be provided to pilots at latest 1 NM before touchdown. For ILS arrival aircraft the landing clearance shall be provided at latest 2NM before touchdown [AO-0505-A].
Record Acknowledgment of Proposed Approach	Once the Flight Deck has accepted the proposed approach, Approach Executive Control records the corresponding arrival approach for this particular flight.
Reject Proposed Approach	Once the proposed approach has been assessed as "not feasible", the Flight Deck rejects it (possibly providing the reason why).
Sequence, Merge, Space Aircraft (SRAP)	Approach Executive Control sequences and merges the arrival traffic while respecting all separation and spacing criteria for SRAP procedure using speed and vectoring (altitude and heading) instructions whenever needed.
Transfer Flight to Tower Runway Controller	At the appropriate time and operational conditions (around Decision Point), the Final Approach Controller - hands over and transfers the control of the flight to Tower Runway Control; - instructs the Flight Deck to contact Tower Runway Control.

400

Issuer	Info Flow	Addressee	Info Element	Info Entity
Approach Executive Control	Inform SRAP Approach Expected o--> SRAP approach information received	Flight Deck	Active Published Approach Information	InstrumentApproachProcedure
Approach Executive Control	If traffic situation requires o--> Fly Aircraft on Arrival Route	Flight Deck	Vectoring instruction	OpenLoopInstruction

Issuer	Info Flow	Addressee	Info Element	Info Entity
Approach Executive Control	If traffic situation requires o--> Fly Aircraft on Arrival Route	Flight Deck	Speed Instruction	IncreaseSpeedToSpeed
Approach Executive Control	If traffic situation requires o--> Fly Aircraft on Arrival Route	Flight Deck	Speed Instruction	ReduceSpeedToSpeed
Approach Executive Control	If traffic situation requires o--> Fly Aircraft on Arrival Route	Flight Deck	Speed Instruction	SpeedConstraint
Approach Executive Control	If traffic situation requires o--> Fly Aircraft on SRAP Approach	Flight Deck	Speed Instruction	IncreaseSpeedToSpeed
Approach Executive Control	If traffic situation requires o--> Fly Aircraft on SRAP Approach	Flight Deck	Speed Instruction	ReduceSpeedToSpeed
Approach Executive Control	If traffic situation requires o--> Fly Aircraft on SRAP Approach	Flight Deck	Speed Instruction	SpeedConstraint
Approach Executive Control	Transfer Flight to Tower Runway Controller o--> Fly Aircraft on SRAP Approach	Flight Deck	Contact Tower Runway Controller instruction	FrequencyChangeInstruc tion
Tower Runway Control	Provide Landing Clearance o--> Fly Aircraft on SRAP Approach	Flight Deck	Landing Clearance	LandingClearance
Flight Deck	A/C established on slope o--> Flight Crew report	Approach Executive Control	Established report	
Approach Executive Control	Transfer Flight to Tower Runway Controller o--> Handover information received	Tower Runway Control	Handover information (incl.selected approach)	CoordinationAndTransfe r

Issuer	Info Flow	Addressee	Info Element	Info Entity
Flight Deck	Acknowledge, Prepare and Brief SRAP Approach o--> Approach acceptance received	Approach Executive Control	Approach Accepted	ApproachClearance
Approach Executive Control	Provide Approach Clearance o--> SRAP approach clearance received	Flight Deck	Approach clearance	ApproachClearance
Flight Deck	Reject Proposed Approach o--> Approach rejection received	Approach Executive Control	Approach Rejected	ApproachClearance

401

402

403 3.3.2.1.2 [NOV-5][SRAP-Non-Nominal-01] Missed Approach (Pilot Initiated) / Go-Around 404 Management

405 This Use Case describes a non-nominal scenario in which a missed approach or a go-around procedure is
406 initiated during a SRAP approach.

407

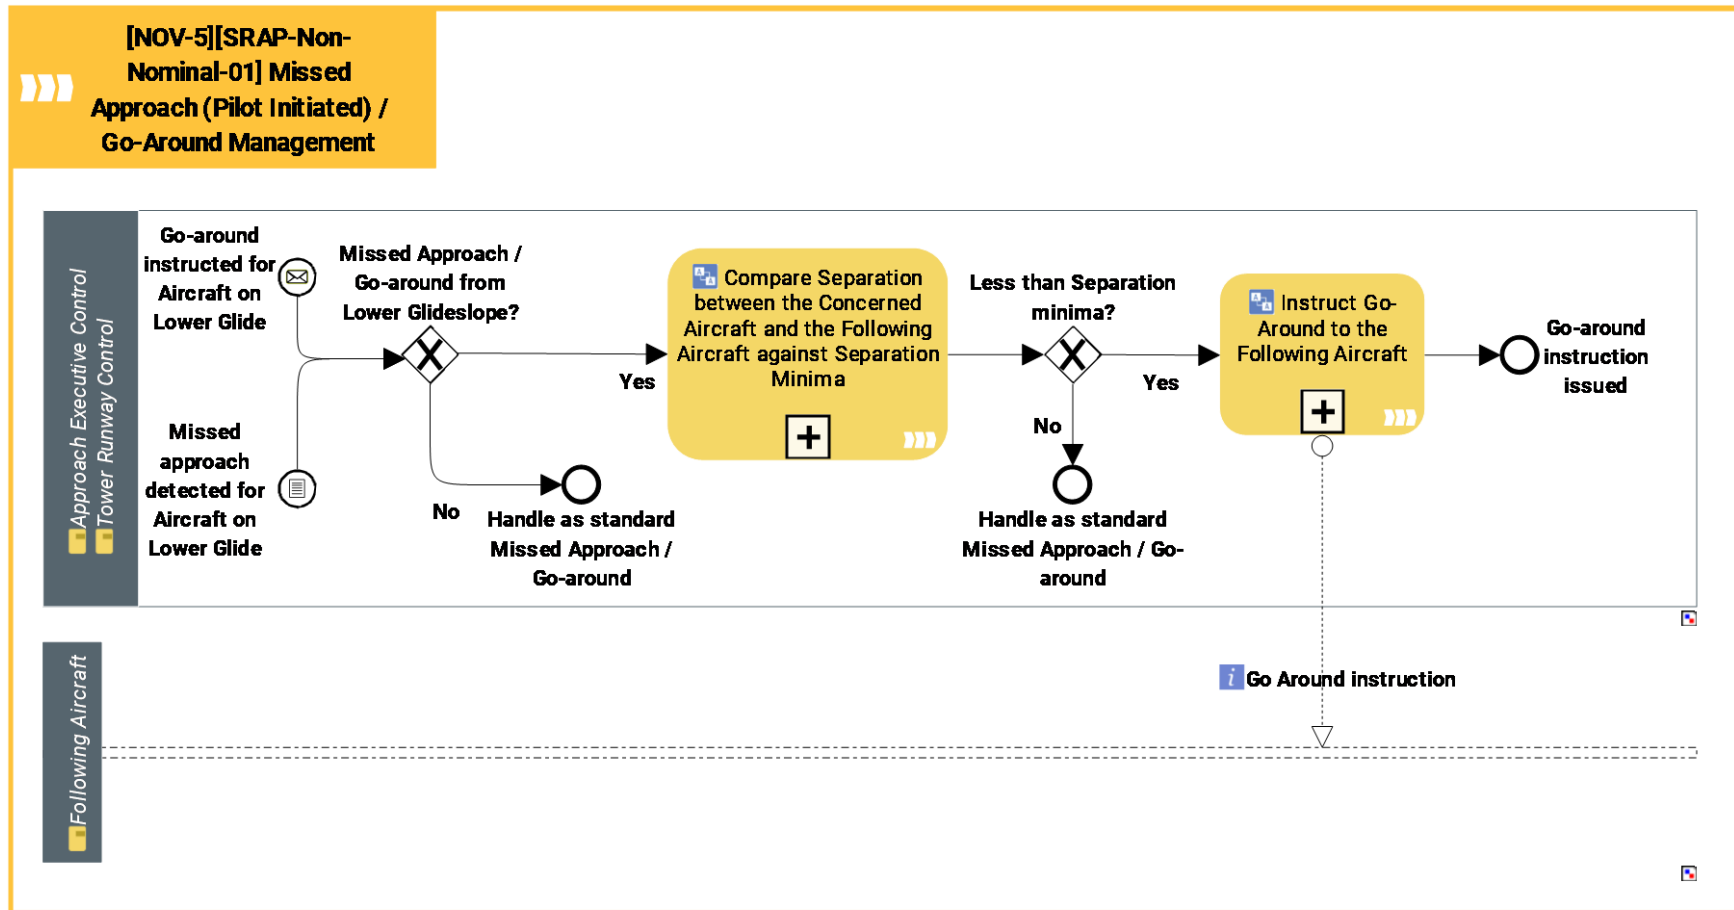


Figure 3: NOV-5 for missed approach/go-around management

Diagram Id: 648B65B060FE6048

Activity	Description
Compare Separation between the Concerned Aircraft and the Following Aircraft against Separation Minima	Approach Executive Control / Tower Runway Control compares the existing separation (between the aircraft going around/executing a missed approach and the following aircraft) to separation minima required locally.
Instruct Go-Around to the Following Aircraft	Approach Executive Control / Tower Runway Control instructs a go - around to the aircraft following the one that was already instructed a go-around/had initiated a missed approach.

Issuer	Info Flow	Addressee	Info Element	Info Entity
Approach Executive Control	Instruct Go-Around to the Following Aircraft o--> Following Aircraft	Following Aircraft	Go Around instruction	ATCInstruction

3.3.2.1.3 [NOV-5][SRAP-Non-Nominal-02] Procedure for Glide Alert Management

This Use Case describes a non-nominal scenario in which a glide alert is activated during a SRAP approach.

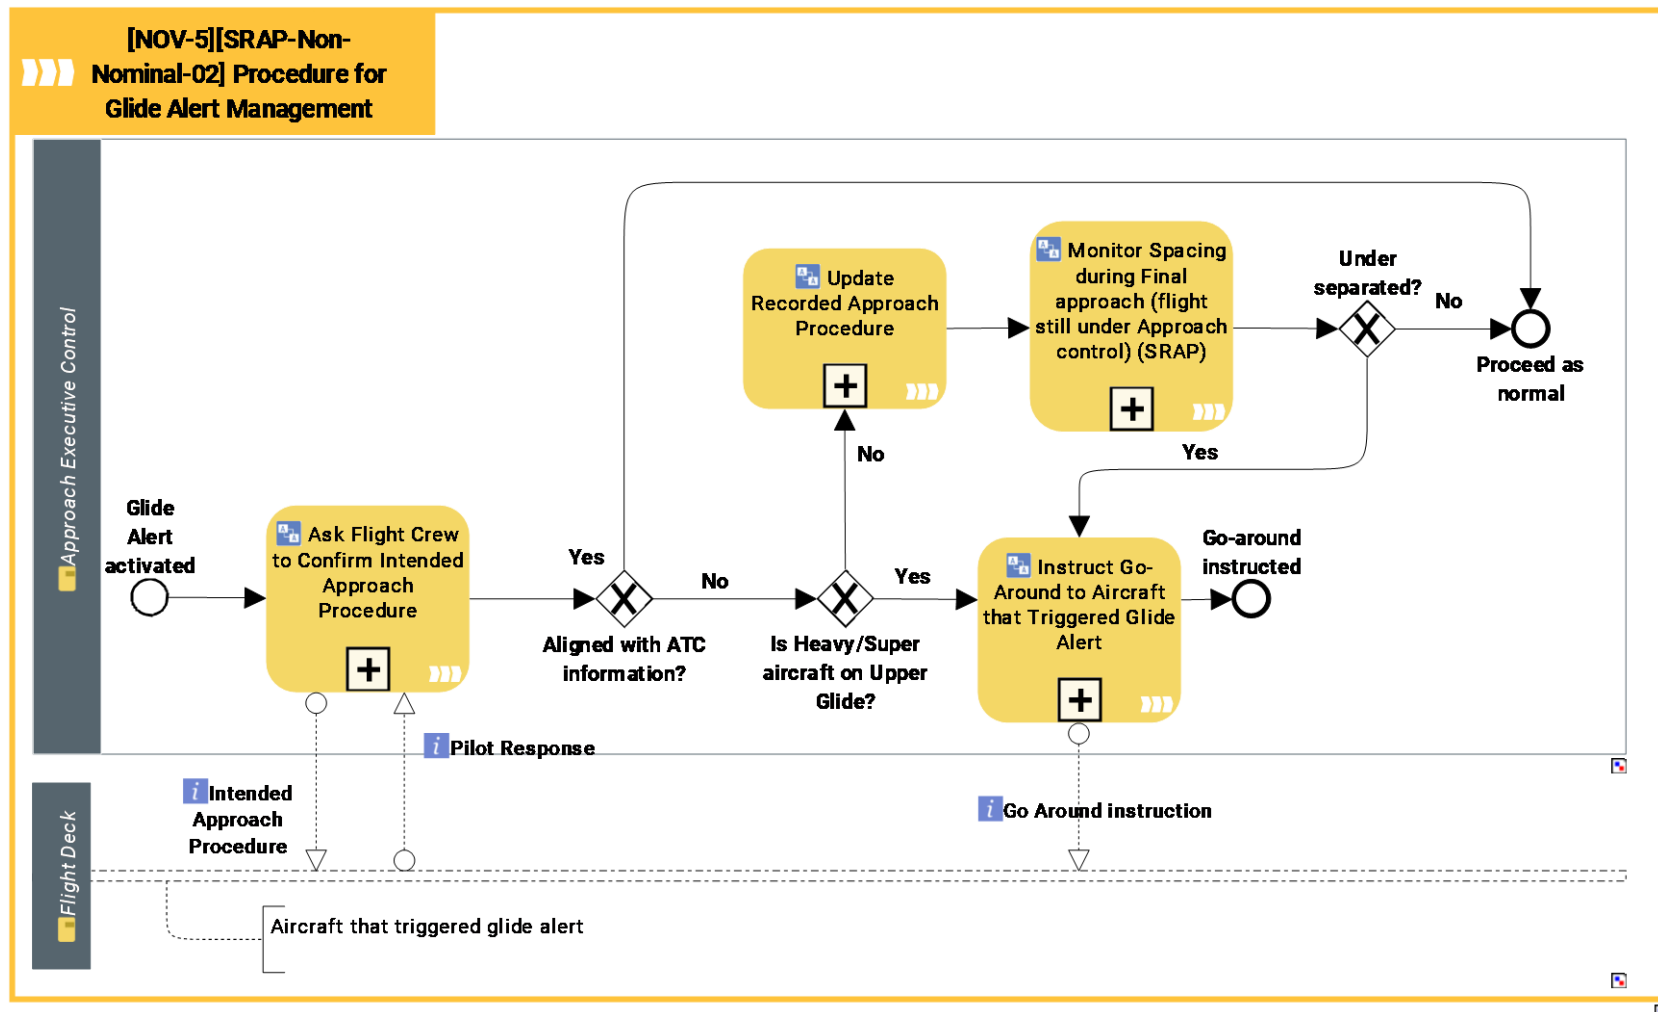


Figure 4: NOV-5 for the glide alert management

Activity	Description
Ask Flight Crew to Confirm Intended Approach Procedure	Approach Executive Control asks Flight Crew to confirm the approach procedure they have selected on board the aircraft.
Instruct Go-Around to Aircraft that Triggered Glide Alert	Approach Executive Control instructs Flight Crew of the aircraft that triggered the glide alert to perform a go-around.
Monitor Spacing during Final approach (flight still under Approach control) (SRAP)	Approach Executive Control monitors the final approach (i.e. aircraft established on the glide slope), especially: - the spacing with aircraft ahead, providing speed instructions if traffic situation requires, and - the adherence to the approach altitude scheme [compliance to the assigned published final approach profile (i.e. interception of the correct glide and adherence to the glide path)]. A go-around procedure may be initiated if the conditions for a safe landing are not fulfilled.
Update Recorded Approach Procedure	Approach Executive Control updates the approach procedure that was recorded for the flight, with the new one.

419

Issuer	Info Flow	Addressee	Info Element	Info Entity
Approach Executive Control	Instruct Go-Around to Aircraft that Triggered Glide Alert o--> Flight Deck	Flight Deck	Go Around instruction	ATCInstruction
Approach Executive Control	Ask Flight Crew to Confirm Intended Approach Procedure o--> Flight Deck	Flight Deck	Intended Approach Procedure	
Flight Deck	Flight Deck o--> Ask Flight Crew to Confirm Intended Approach Procedure	Approach Executive Control	Pilot Response	AIRM_Change_Request

420

421

422 3.3.2.1.4 [NOV-5][SRAP-Non-Nominal-03] Loss of TBS-ORD separation indicators

423 This Use Case describes a non-nominal scenario for the loss of TBS/ORD separation indicators during SRAP
424 approach.

425

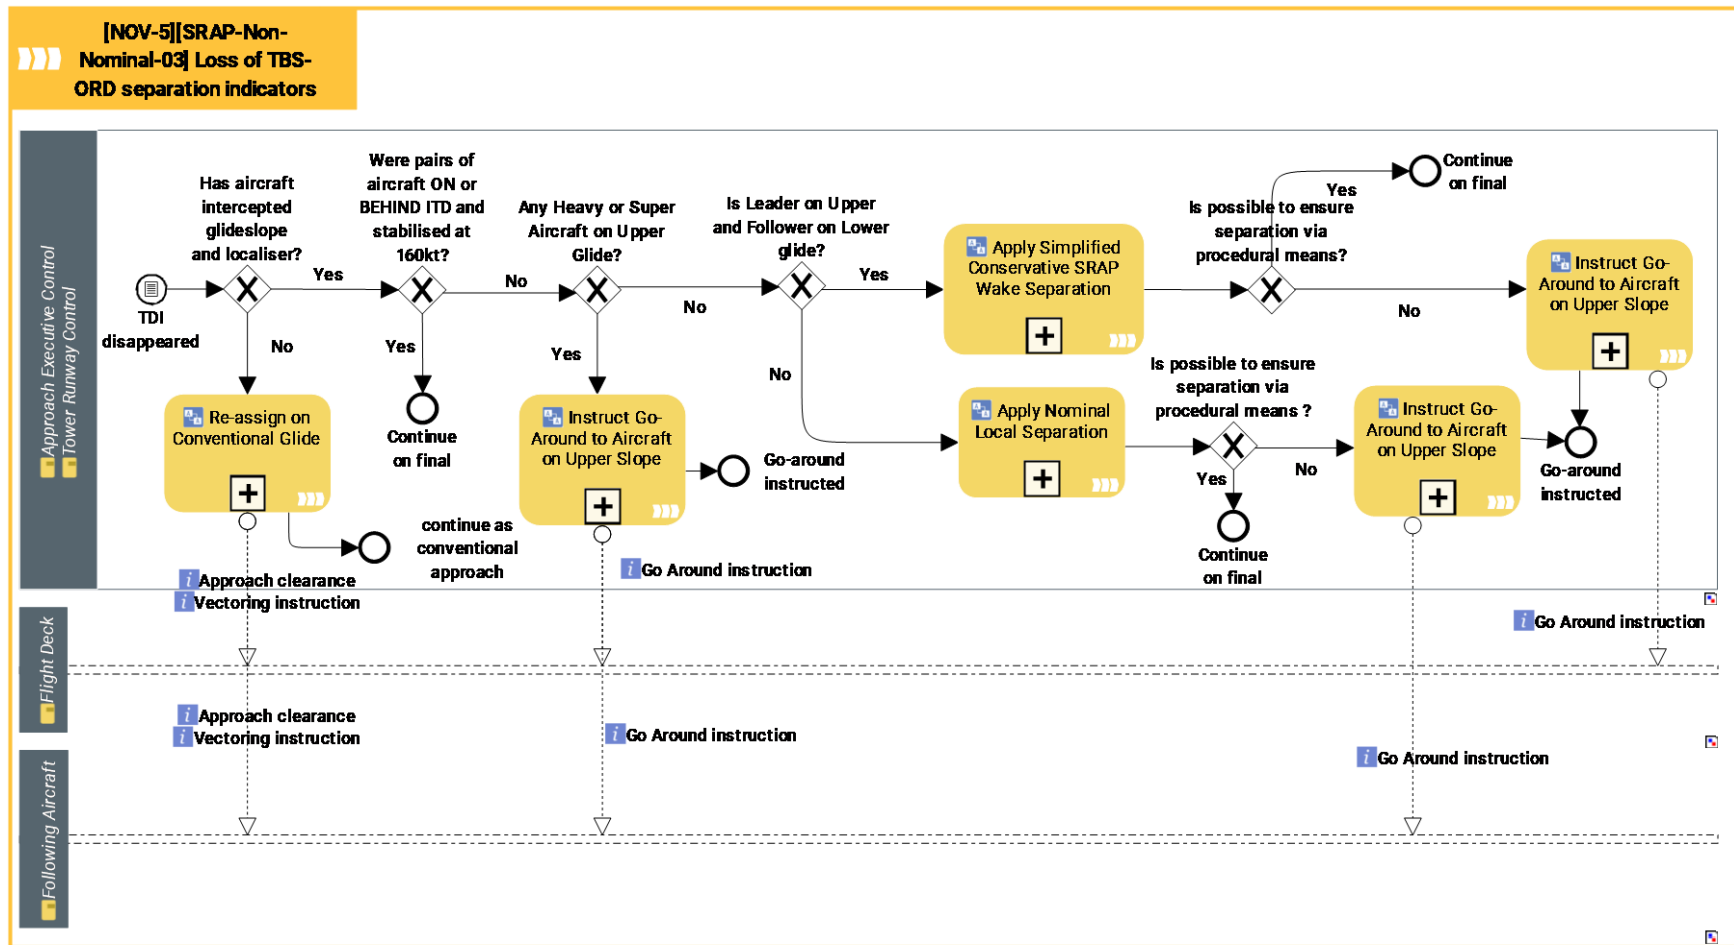


Figure 5: NOV-5 for loss of separation indicators

428

Diagram Id: 825A829960FE520B

429

Activity	Description
Apply Nominal Local Separation	In case leader and follower are flying on the same glide or when leader is on lower glide and follower on upper glide, Approach Executive Control / Tower Runway Control applies the standard separation used on the airport.
Apply Conservative SRAP Wake Separation	In case of leader on upper glide and follower on lower glide, the separation has to be increased. To simplify the rule, as the assistance tool is lost, a simplified conservative wake separation compliant with SRAP is applied by Approach Executive Control / Tower Runway Control, determined at each airport level, according to the separation used locally. For example, if RECAT-EU is the separation scheme applied at the airport, the simplified one could be RECAT-EU + 3NM.
Instruct Go-Around to Aircraft on Upper Slope	Approach Executive Control / Tower Runway Control instructs a go around to the aircraft flying on the upper slope.
Re-assign on Conventional Glide	For aircraft that were cleared to the upper glide, Approach Executive Control: - changes the approach procedure that was cleared to Flight Crew and - issues and records a new clearance to the lower glide.

430

Issuer	Info Flow	Addressee	Info Element	Info Entity
Approach Executive Control	Instruct Go-Around to Aircraft on Upper Slope o-> Flight Deck	Flight Deck	Go Around instruction	ATCInstruction
Approach Executive Control	Instruct Go-Around to Aircraft on Upper Slope o-> Following Aircraft	Following Aircraft	Go Around instruction	ATCInstruction
Approach Executive Control	Re-assign on Conventional Glide o--> Flight Deck	Flight Deck	Vectoring instruction	OpenLoopInstruction
Approach Executive Control	Re-assign on Conventional Glide o--> Flight Deck	Flight Deck	Approach clearance	ApproachClearance

Issuer	Info Flow	Addressee	Info Element	Info Entity
Approach Executive Control	Instruct Go-Around to Aircraft on Upper Slope o--> Flight Deck	Flight Deck	Go Around instruction	ATCInstruction
Approach Executive Control	Re-assign on Conventional Glide o--> Following Aircraft	Following Aircraft	Vectoring instruction	OpenLoopInstruction
Approach Executive Control	Re-assign on Conventional Glide o--> Following Aircraft	Following Aircraft	Approach clearance	ApproachClearance
Approach Executive Control	Instruct Go-Around to Aircraft on Upper Slope o--> Following Aircraft	Following Aircraft	Go Around instruction	ATCInstruction

431

432

433

3.3.3 Differences between new and previous Operating Methods

OI Step code - title		
AO-0319 - Enhanced approach operations using a second runway aiming point (SRAP) (CR 06474 Update AO-0319 (unlink Institutional EN))		
Acknowledge, Prepare and Brief SRAP Approach	Introduce	(see activity description)
Apply Simplified Conservative SRAP Wake Separation	Introduce	(see activity description)
Ask Flight Crew to Confirm Intended Approach Procedure	Introduce	(see activity description)
Assess SRAP Approach Feasibility	Introduce	(see activity description)
Check Conditions for SRAP Approach (ATC)	Introduce	(see activity description)
Compare Separation between the Concerned Aircraft and the Following	Introduce	(see activity description)

Aircraft against Separation Minima		
Execute Landing	Update	During the visual segment, the Flight Deck needs to properly identify the applicable runway marking & lighting. Confusion with the regular aiming point on the same runway needs to be avoided. In addition, the Flight Deck lands the aircraft on the touchdown zone corresponding to the cleared runway aiming point (instead of the one associated to the regular threshold).
Fly Aircraft on SRAP Approach	Introduce	(see activity description)
Inform SRAP Approach Expected	Introduce	(see activity description)
Instruct Go-Around to Aircraft on Upper Slope	Introduce	(see activity description)
Instruct Go-Around to Aircraft that Triggered Glide Alert	Introduce	(see activity description)
Instruct Go-Around to the Following Aircraft	Introduce	(see activity description)
Monitor Spacing during Final approach (flight still under Approach control) (SRAP)	Update	SRAP approach procedure allows potential wake vortex separation to be reduced compared to baseline scenario (ICAO or RECAT-EU). However, the separation might be increased in some conditions, depending on external conditions, aircraft pair and SRAP local setup (potentially an aircraft on SRAP approach followed by a light aircraft). Thus, the separation monitoring task will evolve to consider the separation modification induced by SRAP approach procedure local implementation. SRAP approach procedure also requires full compliance to the assigned final approach profile (interception of the correct glide and adherence to the glide path).
Monitor Spacing during Final approach (SRAP)	Update	SRAP approach procedure allows potential wake vortex separation to be reduced compared to baseline scenario (ICAO or RECAT-EU). However, the separation might be increased in some conditions, depending on external conditions, aircraft pair and SRAP local setup (potentially an aircraft on SRAP approach followed by a light aircraft). Thus, the separation monitoring task will evolve to consider the separation modification induced by SRAP approach procedure local implementation. SRAP approach procedure also requires full compliance to the assigned final approach profile (interception of the correct glide and adherence to the glide path).
Provide Approach Clearance	Update	When Approach Executive Control clears an aircraft for an approach procedure, he/she shall be able to associate and record

		the cleared approach procedure (including the SRAP) for this arrival aircraft.
Re-assign on Conventional Glide	Introduce	(see activity description)
Record Acknowledgment of Proposed Approach	Update	Because of Flight Deck acceptance of the SRAP approach procedure, Executive Approach Control needs to confirm and record the SRAP approach procedure.
Sequence, Merge, Space Aircraft (SRAP)	Update	Sequencing: In the context of the SRAP approach procedure, Approach Executive Control might have to consider the traffic mix characteristics (pair wise separation or ICAO wake category) to achieve the best throughput. For instance, the highest average capacity might be achieved by dispatching the lighter aircraft on the SRAP approach, and heavier aircraft on the full-length runway. Spacing: With a separation tool, the following parameters are considered in the computation of separation and alerts. For SRAP, the reduction allowed depends on the following parameters (considering 3° glideslope for both conventional and SRAP approach procedures): 1. Second runway aiming point position 2. Traffic mix 3. Type of guidance (GBAS, SBAS, RNAV) and subsequent uncertainty on position (Total System error -TSE-) Without a separation tool, Increased Distance Based Separations (DBS with margins) relying on Worst-case scenario for separation for SRAP/ILS separation minima should be used. Merging: Depending on local context and SRAP implementation, the interception altitude might differ between SRAP and conventional approach altitude in order to be able to reduce the separation at the delivery point.
Update Recorded Approach Procedure	Introduce	(see activity description)

Table 5: Differences between new and previous Operating Methods

4 Safety, Performance and Interoperability Requirements (SPR-INTEROP)

[REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1001
Title	Activation/De-activation of SRAP approach procedure
Requirement	Approach Supervision shall decide when a published SRAP becomes active/inactive for operations, considering the conditions for application are and remain met: 1. No operational ATC & weather limitations 2. necessary navigation guidance means are serviceable
Status	<validated>
Rationale	Self-explanatory
Category	<Performance> , <Operational> , <Safety>

[REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

[REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1002
Title	Information to Approach / Tower Control about active SRAP procedures
Requirement	Approach / Tower Supervision shall inform the Approach / Tower Control about the list of active approach procedures
Status	<validated>
Rationale	Self-explanatory
Category	<Operational> , <Human Performance> , <Safety>

445 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

446

447 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1003
Title	Information of SRAP procedure availability
Requirement	The ANSP shall inform Airspace Users (e.g. via AIC) about the availability of SRAP procedures with their differences from the local conventional approaches (including applicable separation minima, location of the second aiming point, landing distance available etc.)
Status	<validated>
Rationale	Self-explanatory
Category	<Operational> , <Human Performance> , <Safety>

448

449 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

450

451 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1004
Title	SRAP - Request for Flight Plans completely and correctly filled
Requirement	ANSPs shall reinforce through a request to Aircraft Operators the need for Flight Plans to be complete and correctly filled with aircraft navigation capabilities.
Status	<validated>

Rationale	This is important so that ATCO can propose the optimum procedure for minimizing wake separation and maximising runway throughput
Category	<Safety> , <Operational> , <Performance>

452

453 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

454

455 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1005
Title	SRAP - First contact of aircraft with approach
Requirement	At first call from an incoming traffic with APPROACH, Approach Executive Control shall provide an information to the arrival aircraft about the expected approach procedure, taking in account the traffic eligibility to SRAP, local working methods for traffic assignment (e.g. Heavies left on conventional approach, and using related standard phraseology (e.g. BLUEBIRD 123, Expect GLS Z approach runway 28L).
Status	<validated>
Rationale	Then, later on, the approach clearance will be provided as usual.
Category	<Operational> , <Human Performance> , <Safety>

456

457 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Inform SRAP Approach Expected
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

458

459

460 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1006
Title	SRAP - Recording of expected approach
Requirement	After Flight Deck acknowledgment, Approach Executive Control shall record the expected approach associated to a given arrival aircraft
Status	<validated>
Rationale	Self-explanatory
Category	<Human Performance> , <Safety> , <Operational>

461

462 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Record Acknowledgment of Proposed Approach
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

463

464 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1007
Title	Go-around when SRAP approach no longer possible after clearance
Requirement	After an aircraft has been cleared to intercept the final approach, if Flight Deck informs ATC that they are no longer able to fly the expected approach (SRAP), the Approach Executive Control shall instruct a go-around
Status	<in progress>
Rationale	Self-explanatory
Category	<Operational> , <Safety>

465

466

467 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Fly Aircraft on SRAP Approach
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

468

469 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1008
Title	SRAP - ATC change of expected approach
Requirement	After Flight Deck has been informed of an expected approach procedure, if a change is needed from ATC, after considering the time needed for Flight Deck to re-configure for the new approach procedure, Approach Executive Control shall inform Flight Deck at the earliest opportunity and with sufficient time before instructing final approach axis interception (special consideration should be given to the transition from ILS/GLS to RNP APCH which is demanding and time consuming for the pilot).
Status	<validated>
Rationale	Self-explanatory
Category	<Operational> , <Safety> , <Human Performance>

470

471 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Sequence, Merge, Space Aircraft (SRAP)
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

472

473 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1010
Title	Availability to ATC of contingency SRAP separation minima - Separation tool in use

Requirement	Applicable Contingency approach separation minima shall be available to Approach Executive Control and Tower Runway Control, when controllers are supported by a separation tool.
Status	<validated>
Rationale	In case of loss of the separation tool, the applicable standard baseline separation table (for same slope pairs) and a simplified mixed slope pairs table (e.g. leader on the higher and follower on the lower slope) shall be available to the ATCOs. These tables are to be used only when the tool is off. As an example, if RECAT-EU is the standard baseline separation to be applied for same slope pairs, the RECAT-EU table shall be available to the controllers. An additional table to cover mixed slope pairs when the separation tool is off, could be RECAT-EU + 3NM.
Category	<Operational> , <Safety> , <Human Performance>

474

475 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Monitor Spacing during Final approach (flight still under Approach control) (SRAP) Sequence, Merge, Space Aircraft (SRAP) Apply Simplified Conservative SRAP Wake Separation
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

476

477 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1011
Title	Availability of applicable standard SRAP separation minima to ATC - No separation tool
Requirement	Applicable Standard approach separation minima when SRAP is active and no separation tool in use shall be available to Approach Executive Control and Tower Runway Control.
Status	<validated>

Rationale	Self-explanatory
Category	<Human Performance> , <Operational> , <Safety>

478

479 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

480

481 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1012
Title	SRAP - Expected or cleared approach procedure reminder at each transfer on frequency
Requirement	At each transfer on frequency, when contacting the next ATC unit, the Flight Deck shall indicate the expected or cleared approach procedure
Status	<in progress>
Rationale	In order to prevent any possible misunderstanding with Flight Deck
Category	<Safety> , <Operational>

482

483 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Fly Aircraft on SRAP Approach
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

484

485 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1013
Title	SRAP - ATC recording of cleared approach procedure

Requirement	When Approach Executive Control clears an aircraft for an approach procedure, he/she shall be able to record the cleared approach procedure for this arrival aircraft.
Status	<validated>
Rationale	Self-explanatory
Category	<Performance> , <Operational> , <Safety> , <Interoperability> , <Human Performance> , <Security> , <IER>

486

487 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Provide Landing Clearance
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

488

489 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1014
Title	SRAP - ATC update of recorded cleared approach
Requirement	Approach Executive Control shall be able to update the procedure that was recorded after the clearance in order to record the procedure flown when different from the one initially cleared
Status	<in progress>
Rationale	Self-explanatory
Category	<Safety> , <Human Performance> , <Operational>

490

491 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Update Recorded Approach Procedure
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

492

493 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1015
Title	SRAP - ATC update of expected recorded approach procedure
Requirement	In case Approach Executive Control changes the expected approach procedure, he/she shall be able to update the expected approach procedure recorded for this arrival aircraft
Status	<validated>
Rationale	Self-explanatory
Category	<Safety> , <Operational> , <Human Performance>

494

495 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Record Acknowledgment of Proposed Approach
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

496

497 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1101
Title	Information about activation of published SRAP
Requirement	Information about a published SRAP being active to a given runway QFU shall be available to Flight deck in order to prepare the expected approach briefing (e.g. via ATIS)
Status	<validated>
Rationale	Self-explanatory
Category	<Human Performance> , <Operational> , <Safety>

498

499 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

500

501 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1104
Title	SRAP - Approach support for aircraft separation in complex separation scheme (separation minima)
Requirement	For SRAP operations with complex separation minima scheme, Approach Executive Control shall be supported by a Separation Delivery function providing indications about applicable separation minima between arrival aircraft pairs onto final approach segment (FTD), using <u>electronically</u> recorded expected and cleared approach procedures.
Status	<validated>
Rationale	The Separation delivery is necessary to facilitate the management of complex separation schemes, that are function of the approach procedure flown by aircraft, and to maintain the Controller situational awareness.
Category	<Safety> , <Operational> , <Human Performance> , <Performance>

502

503 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Monitor Spacing during Final approach (flight still under Approach control) (SRAP)
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

504

505 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1105
Title	SRAP - Approach support for aircraft separation in complex separation scheme (required spacing)

Requirement	For SRAP operations with complex separation minima scheme in high traffic environment, Approach Executive Control shall be supported by a Separation Delivery function providing indications about spacing required to account for compression (ITD) to be applied for achieving the separation minima at the separation delivery point.
Status	<validated>
Rationale	The indication taking into account for compression is needed due to the difference in speed profiles of Leader and Follower after the Deceleration Fix.
Category	<Safety> , <Operational> , <Human Performance> , <Performance>

506

507 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Monitor Spacing during Final approach (flight still under Approach control) (SRAP)
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

508

509 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1106
Title	SRAP - Tower support for aircraft separation in complex separation scheme (separation minima)
Requirement	For SRAP operations with complex separation minima scheme, Tower Runway Control shall be supported by a Separation Delivery function providing indications about applicable separation minima between arrival aircraft pairs onto final approach segment (FTD)
Status	<validated>
Rationale	Self-explanatory
Category	<Safety> , <Performance> , <Operational> , <Human Performance>

510

511

512 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Monitor Spacing during Final approach (SRAP)
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

513

514 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1107
Title	SRAP - Warning when catching-up occurs
Requirement	For SRAP operations with complex separation minima scheme in high traffic environment, Approach Executive Control shall be warned when an aircraft is significantly catching-up the preceding traffic with an anticipated risk of loss of separation minima.
Status	<validated>
Rationale	Self-explanatory
Category	<Operational> , <Safety> , <Human Performance>

515

516 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Monitor Spacing during Final approach (flight still under Approach control) (SRAP)
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

517

518 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1108
Title	SRAP - Alert to Approach when deviation / non-compliance to vertical profile
Requirement	Approach Executive Control shall be alerted when an aircraft is not complying / deviating from the assigned published final approach profile.

Status	<validated>
Rationale	Self-explanatory
Category	<Operational> , <Human Performance> , <Safety>

519

520 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Monitor Spacing during Final approach (flight still under Approach control) (SRAP)
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

521

522 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1109
Title	SRAP - Interception points display
Requirement	The need for displaying to Approach Executive Control / Tower Runway Control the interception points respective for each procedure shall be evaluated as part of the local deployment, such that the visual references are operationally relevant and unambiguously presented without e.g. cluttering on the controller air surveillance display.
Status	<validated>
Rationale	Self-explanatory
Category	<Operational> , <Safety> , <Human Performance>

523

524 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

525

526

527 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1110
Title	SRAP - identification of aircraft aiming point
Requirement	When supported by ground surveillance displays, Tower Runway Control shall be able to easily and unambiguously identify the assigned landing aiming point for each landing aircraft
Status	<validated>
Rationale	Self-explanatory
Category	<Safety> , <Operational> , <Human Performance>

528

529 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Monitor Spacing during Final approach (SRAP)
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

530

531 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1111
Title	SRAP - Tower Runway Control map
Requirement	When supported by ground surveillance (with aerodrome maps), the runway markings for all active approaches shall be displayed to Tower Runway Control
Status	<validated>
Rationale	Self-explanatory
Category	<Safety> , <Operational> , <Human Performance>

532

533 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2

<ALLOCATED_TO>	<Activity>	Monitor Spacing during Final approach (SRAP)
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

534

535 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1112
Title	SRAP - Arrival sequencing optimisation or role support
Requirement	For SRAP operations, Approach Executive Control should be supported by arrival sequencing optimisation and/or role in assigning aircraft to an active approach procedure.
Status	<in progress>
Rationale	It is recommended that, in peak times (nominal situations), sequencing optimisation and/or Assistant role be available.
Category	<Human Performance> , <Performance> , <Safety> , <Operational>

536

537 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Check Conditions for SRAP Approach (ATC)
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

538

539 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1113
Title	SRAP - Arrival sequencing optimisation or role support not available
Requirement	In case the support from arrival sequencing optimisation or role is not available and when the traffic pressure is sufficiently high such that the runway throughput is penalised due to the increased separation minima introduced by SRAP procedures, Approach Executive Control shall assign Heavy and Super Heavy aircraft types to the lower glide path.
Status	<validated>

Rationale	Self-explanatory
Category	<Operational> , <Safety> , <Human Performance> , <Performance>

540

541 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Check Conditions for SRAP Approach (ATC)
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

542

543 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1114
Title	SRAP - Deviation alert reliability
Requirement	The alert shall be sufficiently reliable, the level of reliability being defined locally at each airport.
Status	<validated>
Rationale	This increases the workload and communication load of the Controller.
Category	<Safety> , <Human Performance> , <Operational>

544

545 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Monitor Spacing during Final approach (flight still under Approach control) (SRAP)
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

546

547 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1201
Title	SRAP chart indications

Requirement	The SRAP approach chart shall follow the following elements: • be specific to one final approach path (i.e. touchdown aiming point) and supporting navigation guidance mean, • indicate the position and color of the associated PAPI.
Status	<validated>
Rationale	Self-explanatory
Category	<Safety> , <Operational>

548

549 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2

550

551 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1202
Title	SRAP procedures publication
Requirement	SRAP procedures shall be published approach procedures flown based on ILS or GLS or RNP APCH with vertical guidance
Status	<validated>
Rationale	Self-explanatory
Category	<Operational> , <Safety>

552

553 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2

554

555 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1203
Title	SRAP procedures navigation support and activation

Requirement	SRAP operations for a given slope angle may be simultaneously supported by different navigation guidance systems.
Status	<validated>
Rationale	This may allow to increase the usage of SRAP, since the level of aircraft equipage may be limited for given navigation technologies, and a limited SRAP use may be detrimental to capacity. For example, a GLS and a RNP APCH 3.60 could be active and operated at the same time.
Category	<Operational>

556

557 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2

558

559 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1204
Title	SRAP separation minima to be specified
Requirement	SRAP Approach separation minima shall be specified for each combination of published approach procedure with different glideslopes, taking into account the associated navigation means and corresponding vertical accuracy around the published profile, for • Leader and follower on same glideslope • Leader upper glide - follower lower glide • Leader lower glide - follower upper glide
Status	<validated>
Rationale	Wake separation minima depends on the navigation accuracy around the published vertical profile
Category	<Operational> , <Safety>

560

561

562 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

563

564 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1205
Title	SRAP wake turbulence minima to be applied
Requirement	Approach Executive Control shall apply longitudinal wake turbulence distance-based separation minima for the following combinations: • Leader and follower on same glideslope • Leader upper glide - follower lower glide • Leader lower glide - follower upper glide when both aircraft are descending on their respective glide slope.
Status	<validated>
Rationale	The exposure to wake turbulence is affected when an aircraft is flying above or below the preceding one, compared when both fly the same glideslope
Category	<Safety> , <Operational>

565

566 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Monitor Spacing during Final approach (flight still under Approach control) (SRAP)

567

568 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1206
Title	SRAP and ROT

Requirement	If the Runway Occupancy Time (ROT) is affected by landing on an active further runway aiming point, this ROT spacing shall be taken into account in the runway separation management (ROT might become the most constraining factor due to changes in separation minima)
Status	<validated>
Rationale	ROT may be positively or negatively affected by landing on a further runway aiming point, depending on the runway exit locations
Category	<Safety> , <Operational>

569

570 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

571

572 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1207
Title	SRAP - Chart specificity if RNP APCH
Requirement	For high density operations supported by Separation Delivery Function with TDIs, when SRAP are flown based on RNP APCH navigation, the ANSP shall request on the charts, Flight Deck to inform Approach Executive Control when aircraft is unable to use the FMS guidance for final approach axis interception.
Status	<validated>
Rationale	There is a need for flexibility in final approach axis interception (e.g. using vectoring), for allowing optimised final approach interception and separation management by ATC
Category	<Safety> , <Performance> , <Operational>

573

574 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2

<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach
----------------	----------------	---

575

576 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1208
Title	SRAP - Chart indications about second aiming point
Requirement	The SRAP approach chart shall include altitude/distance information for the applicable runway aiming point to facilitate Flight Deck procedure check during the approach
Status	<validated>
Rationale	Self-explanatory
Category	<Performance> , <Operational> , <Safety>

577

578 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

579

580 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1209
Title	SRAP - airport layout constraints
Requirement	When designing the SRAP local procedure and the location of the second threshold and aiming point, the current and future taxiway layout of the aerodrome shall be taken into consideration for facilitating runway vacation
Status	<validated>
Rationale	Acceptable occurrence of missed runway exit when landing to the second aiming point shall be established in accordance to the main performance target (e.g. noise, runway occupancy time, flight efficiency, etc)
Category	<Operational> , <Performance>

581

582 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

583

584 [REQ]

Identifier	REQ-14.2-SPRINTEROP-CTL.1210
Title	SRAP - landing distance available
Requirement	When designing the SRAP local procedure, the location of the second runway aiming point shall provide sufficient landing distance available for all eligible aircraft at that specific airport
Status	<validated>
Rationale	1) Occurrence of runway overrun when landing to the second aiming point shall not increase with respect to approaches to the first aiming point. See SAR SO 06b 2) Occurrence of Go Around when landing to the second aiming point shall not increase with respect to approaches to the first aiming point.
Category	<Operational> , <Safety> , <Human Performance> , <Performance>

585

586 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

587

588 [REQ]

Identifier	REQ-14.2-SPRINTEROP-APT.1301
Title	SRAP - approach and landing visual aids

Requirement	Flight Deck shall be supported by appropriate approach and landing visual aids to acquire the references for determining if approach and landing can be continued below CATI decision height.
Status	<validated>
Rationale	it is essential for safety to prevent confusion between the different runway aiming points
Category	<Operational> , <Safety> , <Human Performance>

589

590 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Fly Aircraft on SRAP Approach Execute Landing
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

591

592 [REQ]

Identifier	REQ-14.2-SPRINTEROP-APT.1302
Title	SRAP - Distinction between the thresholds
Requirement	In case of SRAP, Flight Deck shall be able to clearly distinguish between each threshold and aiming point through appropriate landing visual aid references (e.g. location and identification of the second runway threshold and aiming point, a second PAPI).
Status	<validated>
Rationale	Self-explanatory
Category	<Operational> , <Safety> , <Human Performance>

593

594 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Fly Aircraft on SRAP Approach Execute Landing

595

596 [REQ]

Identifier	REQ-14.2-SPRINTEROP-APT.1303
Title	SRAP - Approach lighting
Requirement	For SRAP operations down to CAT I minima, Flight Deck shall be able to clearly see the approach lighting for the threshold and aiming point that they are flying to.
Status	<validated>
Rationale	mandatory per ICAO
Category	<Human Performance> , <Safety> , <Operational>

597

598 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

599

600 [REQ]

Identifier	REQ-14.2-SPRINTEROP-APT.1304
Title	SRAP lighting switch off
Requirement	When the second runway threshold is not active (i.e. operating only the conventional threshold), the lightings of the secondary runway threshold and aiming point shall be switched off such as to avoid confusing Flight Deck
Status	<in progress>
Rationale	Self-explanatory
Category	<Human Performance> , <Operational> , <Safety>

601

602 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2

<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach
----------------	----------------	---

603

604 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ACFT.2101
Title	Initial assessment of SRAP feasibility
Requirement	Before contacting APP Control, Flight Deck shall assess the feasibility of the probable SRAP operation under the expected flight and weather conditions
Status	<validated>
Rationale	Moment TBC because APP ATCO would like a quick response from pilot when proposing SRAP, but pilots would prefer to only assess SRAP if it is confirmed as the expected approach
Category	<Human Performance> , <Safety> , <Operational>

605

606 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Assess SRAP Approach Feasibility

607

608 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ACFT.2102
Title	Confirmation of SRAP feasibility
Requirement	Upon cleared for SRAP Approach, Flight Deck shall confirm the feasibility of the instructed SRAP operation under the actual flight and weather conditions
Status	<validated>
Rationale	Occurrence of runway overrun when landing to the second aiming point shall not increase with respect to approaches to the first aiming point. See SAR SO 06b
Category	<Human Performance> , <Safety> , <Operational>

609

610 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Initiate SRAP Approach

611

612 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ACFT.2103
Title	SRAP specific approach briefing on visual references
Requirement	Flight Deck shall recall during approach briefing the specific visual references (runway marking and lighting, VASI/PAPI, etc) that are expected in SRAP operation.
Status	<validated>
Rationale	Self-explanatory
Category	<Human Performance> , <Safety> , <Operational>

613

614 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Acknowledge, Prepare and Brief SRAP Approach

615

616 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ACFT.2104
Title	SRAP specific briefing on landing distance
Requirement	Flight Deck shall recall during approach briefing the reduced landing distance available from the second aiming point to the expected runway exit in SRAP operation
Status	<validated>
Rationale	Self-explanatory

Category	<Safety> , <Operational> , <Human Performance>
----------	--

617

618 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Acknowledge, Prepare and Brief SRAP Approach

619

620 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ACFT.2105
Title	SRAP flying modes
Requirement	Flight Deck shall be able to fly a SRAP operation in both manual and AP/FD modes
Status	<validated>
Rationale	Self-explanatory
Category	<Human Performance> , <Operational>

621

622 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Fly Aircraft on SRAP Approach

623

624 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ACFT.2106
Title	SRAP operations vs SOP
Requirement	Flight Deck shall be able to fly a SRAP operation in a similar way (IHM, SOP, etc) as when an approach with single aiming point is flown
Status	<validated>
Rationale	Self-explanatory

Category	<Operational> , <Human Performance>
----------	-------------------------------------

625

626 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Fly Aircraft on SRAP Approach

627

628 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ACFT.2107
Title	SRAP - Change of frequency between APP and TWR
Requirement	Flight Deck shall pay particular attention to the transition of frequencies from APP to TWR and shall not delay it.
Status	<validated>
Rationale	To avoid an aircraft being in between two frequencies where they are unable to communicate a missed approach or, conversely, the ATCO not to be able to communicate a go-around.
Category	<Safety> , <Human Performance> , <Operational>

629

630 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][EAO-02] SRAP Published Approach

631

632 [REQ]

Identifier	REQ-14.2-SPRINTEROP-GALT.0001
Title	SRAP Glide alert - Check of approach flown
Requirement	When a wrong glide alert is activated, Approach Executive Control shall ask Flight Crew to confirm the flown approach procedure.

Status	<validated>
Rationale	In case of glide alert, Approach executive shall confirm the aircraft that triggered the alert is indeed not flying the expected glide slope.
Category	<Operational> , <Safety> , <Human Performance>

633

634 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Ask Flight Crew to Confirm Intended Approach Procedure
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-02] Procedure for Glide Alert Management

635

636 [REQ]

Identifier	REQ-14.2-SPRINTEROP-GALT.0002
Title	SRAP Glide alert - Instruct go around to aircraft mistakenly on SRAP if Heavy
Requirement	When a wrong glide alert is activated by a Heavy aircraft wrongly on the SRAP procedure, and Flight Crew confirms flying a different approach procedure than the instructed one, Approach Executive Control shall instruct a go around to that aircraft.
Status	<validated>
Rationale	Self-explanatory
Category	<Safety> , <Human Performance> , <Operational>

637

638 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Instruct Go-Around to Aircraft that Triggered Glide Alert
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-02] Procedure for Glide Alert Management

639 [REQ]

Identifier	REQ-14.2-SPRINTEROP-GALT.0003
Title	SRAP Glide alert - Coordination between controllers
Requirement	After a glide alert, Approach Executive Control shall coordinate with Tower Runway Control about the aircraft that triggered the glide alert when SRAP is active.
Status	<validated>
Rationale	To maintain the situational awareness of Tower Runway Control. This is particularly important when an aircraft is finally not flying the procedure it would normally fly (for example if a Heavy aircraft is flying the SRAP Approach).
Category	<Human Performance> , <Operational> , <Safety>

640

641 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-02] Procedure for Glide Alert Management

642

643 [REQ]

Identifier	REQ-14.2-SPRINTEROP-GALT.0004
Title	SRAP Glide alert - Aircraft other than Heavy
Requirement	When a wrong glide alert is activated by an aircraft other than Heavy and Flight Crew confirms flying a different approach procedure than the instructed one, the Approach Executive Control shall: 1. Update the CWP HMI with the actually flown approach procedure 2. Check the position of the concerned aircraft, leading aircraft and following aircraft against their indicators 3. If any under separated, instruct go-around to the flight which triggered the glide alert.

Status	<validated>
Rationale	Self-explanatory
Category	<Human Performance> , <Operational> , <Safety>

644

645 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Update Recorded Approach Procedure Instruct Go-Around to Aircraft that Triggered Glide Alert
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-02] Procedure for Glide Alert Management

646

647 [REQ]

Identifier	REQ-14.2-SPRINTEROP-GOAR.0001
Title	SRAP Go around management - Compare Separation between the aircraft going around and the following aircraft against Separation Minima
Requirement	If the lead aircraft is performing a missed approach or a go-around from the lower glide slope and the follower is on the upper glide slope, Approach Executive Control or Tower Runway Control shall compare the distance between the aircraft going around and the following one, against the reference separation minima applied at the airport.
Status	<validated>
Rationale	Self explanatory Example of reference separation minima could be RECAT-EU.
Category	<Human Performance> , <Operational> , <Safety>

648

649 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2

<ALLOCATED_TO>	<Activity>	Compare Separation between the Concerned Aircraft and the Following Aircraft against Separation Minima
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-01] Missed Approach (Pilot Initiated) / Go-Around Management

650

651 [REQ]

Identifier	REQ-14.2-SPRINTEROP-GOAR.0002
Title	SRAP Go around management - Instruction of go around to aircraft following the one going around
Requirement	When the separation between the aircraft going around and the following one is less than the reference separation minima, Approach Executive Control or Tower Runway Control shall instruct a go-around to the following aircraft, whilst ensuring the two aircraft are on diverging flight paths.
Status	<validated>
Rationale	Self-explanatory
Category	<Human Performance> , <Operational> , <Safety>

652

653 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Instruct Go-Around to the Following Aircraft
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-01] Missed Approach (Pilot Initiated) / Go-Around Management

654

655 [REQ]

Identifier	REQ-14.2-SPRINTEROP-GOAR.0003
Title	SRAP Visualisation of vertical position of aircraft on glide
Requirement	Approach Executive Control and Tower Runway Control should be able to check the vertical position of an aircraft.
Status	<in progress>

Rationale	That would allow the controller identify an aircraft intercepting the wrong glide or an aircraft initiating a missed approach.
Category	<Human Performance> , <Operational> , <Safety>

656

657 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-01] Missed Approach (Pilot Initiated) / Go-Around Management

658

659 [REQ]

Identifier	REQ-14.2-SPRINTEROP-GOAR.0004
Title	SRAP Missed approach - Info to controller
Requirement	When SRAP procedure is active, Flight Deck, on standard approach or SRAP one, shall communicate to Approach Executive Control or Tower Runway Control about a missed approach as soon as practicable.
Status	<in progress>
Rationale	In order to avoid lost time in the go-around procedure where the following aircraft could risk flying into the wake of the leading aircraft that went around.
Category	

660

661 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-01] Missed Approach (Pilot Initiated) / Go-Around Management

662

663 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ORDF.0001
------------	-------------------------------

Title	SRAP Loss of separation tool - Application of conservative SRAP wake separations
Requirement	In case of loss of separation tool, for all upper-lower slope pairs without Heavy which are not stabilised at 160kts or not on (or behind) the ITD, Approach Executive Control or Tower Runway Control shall apply the additional simplified mixed slope pairs table. If that is not possible, Approach Executive Control or Tower Runway Control shall instruct a go around to the aircraft flying the SRAP procedure.
Status	<validated>
Rationale	Self explanatory As an example, if RECAT-EU is the standard baseline separation to be applied for same slope pairs, the RECAT-EU table shall be available to the controllers. An additional table to cover mixed slope pairs when the separation tool is off, be could be RECAT-EU + 3NM.
Category	<Human Performance> , <Operational> , <Safety>

664

665 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Apply Simplified Conservative SRAP Wake Separation Instruct Go-Around to Aircraft on Upper Slope
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-03] Loss of TBS-ORD separation indicators

666

667 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ORDF.0002
Title	SRAP Loss of separation tool - Go around to SRAP aircraft when necessary separation cannot be ensured

Requirement	In case of loss of separation tool, for all lower-upper and same slope pairs which are not stabilised at 160kts or not on (or behind) the ITD, Approach Executive Control or Tower Runway Control shall apply reference separation minima. If that is not possible, Approach Executive Control or Tower Runway Control shall instruct a go around to the aircraft flying the SRAP procedure.
Status	<validated>
Rationale	Self-explanatory
Category	<Human Performance> , <Safety> , <Operational>

668

669 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Instruct Go-Around to Aircraft on Upper Slope Apply Nominal Local Separation
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-03] Loss of TBS-ORD separation indicators

670

671 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ORDF.0003
Title	SRAP Loss of separation tool - reassignment to conventional approach procedure
Requirement	In case of loss of separation tool, Approach Executive Control shall re-assign all the aircraft that have not yet intercepted the glide slope and localiser, to conventional approach procedure.
Status	<validated>
Rationale	Self-explanatory
Category	<Human Performance> , <Safety> , <Operational>

672

673

674 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Re-assign on Conventional Glide
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-03] Loss of TBS-ORD separation indicators

675

676 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ORDF.0004
Title	SRAP Loss of separation tool - assistance to Approach Executive Control
Requirement	In peak traffic, in case of loss of separation tool, the coordinator/assistant shall aid the Approach Executive Control for checking the separations between aircraft and suggesting which aircraft should be sent around.
Status	<validated>
Rationale	Self-explanatory
Category	<Operational> , <Safety> , <Human Performance>

677

678 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-03] Loss of TBS-ORD separation indicators

679

680 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ORDF.0005
Title	SRAP Loss of separation tool - coordination between Approach Executive Control and Tower Runway Control
Requirement	In case of loss of separation tool, Approach Executive Control should inform Tower Runway Control about the last aircraft flying the SRAP procedure until the tool is running again and the situation is back to nominal.

Status	<validated>
Rationale	That would improve Tower Runway Control situational awareness and avoid Tower Runway Control to be surprised if an aircraft flying on SRAP arrives after a number of aircraft on standard approach.
Category	<Operational> , <Safety> , <Human Performance>

681

682 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-03] Loss of TBS-ORD separation indicators

683

684 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ORDF.0006
Title	SRAP Loss of separation tool - Pairs of aircraft stabilised and on (or behind) ITD
Requirement	In case of loss of separation tool, Approach Executive Control or Tower Runway Control should let all aircraft from pairs which are stabilised at 160kts and on (or behind) the ITD, continue on final.
Status	<validated>
Rationale	The Approach Executive Control or Tower Runway Control needs to be confident that aircraft are stabilised before allowing them to continue on final.
Category	<Operational> , <Safety> , <Human Performance>

685

686 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-03] Loss of TBS-ORD separation indicators

687

688 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ORDF.0007
Title	SRAP Loss of separation tool - Pairs of aircraft not stabilised or not on (or behind) ITD
Requirement	In case of loss of separation tool, for all mixed slope pairs which are not stabilised at 160kts or not on (or behind) the ITD, and for which a heavy aircraft is on the upper glide, Approach Executive Control or Tower Runway Control shall instruct a go-around to the heavy aircraft.
Status	<validated>
Rationale	Self-explanatory
Category	<Safety> , <Operational> , <Human Performance>

689

690 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<Activity>	Instruct Go-Around to Aircraft on Upper Slope
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-03] Loss of TBS-ORD separation indicators

691

692 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ORDF.0008
Title	SRAP Loss of separation tool - Return to operations
Requirement	When the separation delivery tool returns to operations, the Approach Executive Control shall communicate to the Tower Runway Control the first aircraft in the sequence that is performing SRAP arrival procedure.
Status	<validated>
Rationale	This is important for the Tower Runway Control to know that the SRAP is back in operation.
Category	<Operational> , <Human Performance> , <Safety>

693

694 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-03] Loss of TBS-ORD separation indicators

695

696 [REQ]

Identifier	REQ-14.2-SPRINTEROP-ORDF.0009
Title	SRAP Loss of separation tool - Need for assistant
Requirement	Additional staffing shall be available so that in peak (non-nominal) conditions, an Assistant can support the Approach Executive Control position.
Status	<validated>
Rationale	The Supervisor will decide when an Assistant is needed, in coordination with Approach Runway Control.
Category	<Safety> , <Human Performance> , <Operational>

697

698 [REQ Trace]

Relationship	Linked Element Type	Identifier
<ALLOCATED_TO>	<SESAR Solution>	PJ02-PJ.02-W2-14.2
<ALLOCATED_TO>	<ActivityView>	[NOV-5][SRAP-Non-Nominal-03] Loss of TBS-ORD separation indicators

5 References and Applicable Documents

5.1 Applicable Documents

Content Integration

[1] B.04.01 D138 EATMA Guidance Material

[2] EATMA Community pages

[3] SESAR ATM Lexicon

Content Development

[4] B4.2 D106 Transition Concept of Operations SESAR 2020

System and Service Development

[5] 08.01.01 D52: SWIM Foundation v2

[6] 08.01.01 D49: SWIM Compliance Criteria

[7] 08.01.03 D47: AIRM v4.1.0

[8] 08.03.10 D45: ISRM Foundation v00.08.00

[9] B.04.03 D102 SESAR Working Method on Services

[10] B.04.03 D128 ADD SESAR1

[11] B.04.05 Common Service Foundation Method

Performance Management

[12] B.04.01 D108 SESAR 2020 Transition Performance Framework

[13] B.04.01 D42 SESAR2020 Transition Validation

[14] B.05 D86 Guidance on KPIs and Data Collection support to SESAR 2020 transition.

[15] 16.06.06-D68 Part 1 –SESAR Cost Benefit Analysis – Integrated Model

[16] 16.06.06-D51-SESAR_1 Business Case Consolidated_Deliverable-00.01.00 and CBA

[17] Method to assess cost of European ATM improvements and technologies, EUROCONTROL (2014)

[18] ATM Cost Breakdown Structure_ed02_2014

[19] Standard Inputs for EUROCONTROL Cost Benefit Analyses

[20] 16.06.06_D26-08 ATM CBA Quality Checklist

[21]16.06.06_D26_04_Guidelines_for_Producing_Benefit_and_Impact_Mechanisms

Validation

[22]03.00 D16 WP3 Engineering methodology

[23]Transition VALS SESAR 2020 - Consolidated deliverable with contribution from Operational Federating Projects

[24]European Operational Concept Validation Methodology (E-OCVM) - 3.0 [February 2010]

System Engineering

[25]SESAR 2020 Requirements and Validation Guidelines

Safety

[26]SESAR, Safety Reference Material, Edition 4.0, April 2016

[27]SESAR, Guidance to Apply the Safety Reference Material, Edition 3.0, April 2016

[28]SESAR, Final Guidance Material to Execute Proof of Concept, Ed00.04.00, August 2015

[29]SESAR, Resilience Engineering Guidance, May 2016

Human Performance

[30]16.06.05 D 27 HP Reference Material D27

[31]16.04.02 D04 e-HP Repository - Release note

Environment Assessment

[32]SESAR, Environment Reference Material, alias, "Environmental impact assessment as part of the global SESAR validation", Project 16.06.03, Deliverable D26, 2014.

[33]ICAO CAEP – "Guidance on Environmental Assessment of Proposed Air Traffic Management Operational Changes" document, Doc 10031.

Security

[34]16.06.02 D103 SESAR Security Ref Material Level

[35]16.06.02 D137 Minimum Set of Security Controls (MSSCs).

[36]16.06.02 D131 Security Database Application (CTRL_S)

5.2 Reference Documents

[37]PJ02-02 D2.1.01 PJ02-02 OSED-SPR-Interop Part I, Edition 00.01.00

[38]PJ02-02 D2.1.04 SESAR PJ02-02 VALR, Edition 00.01.00

[39]P06.08.05 D05 Enhanced Arrival Procedures Enabled by GBAS - INTEROP – Consolidation, Edition 00.01.02

756 [40]P06.08.08 D07 Enhanced Arrival Procedures enabled by GBAS – OSED Consolidation, Edition
757 00.01.01
758 [41]D4.2.006 - PJ.02-W2-14.2 VALR Final, Edition 00.01.00

Appendix A Cost and Benefit Mechanisms

A.1 Stakeholders identification and Expectations

The table below presents the stakeholders' expectations as identified by the solution.

Stakeholder	Involvement	Why it matters to stakeholder
Airspace Users	No involvement in the validations. Interested in the results.	Capacity, Cost Efficiency and Environmental Sustainability are key KPA for Airspace users. Increase in airport capacity means possible increase in demand for Airspace Users. Reduction in environmental impact affects both fuel consumption and operating restrictions coming from noise limits. Airspace Users are interested as well in assessing the impact on crew on safety and HP point of view.
ANSPs	ANSPs are running the exercises, providing operational expertise for the validations too. ATCOs will provide feedback on PJ02-02 solution via real-time simulations	Better cost efficiency, capacity increase and safety assurance are targets for ANSP. This solution should meet these ANSP target.
Airport Operators	Airport Operators support to operational scenario(s) definition and review of validations results.	Some Airport Operators operating large hub airports are looking into the business model of contracting ANSP services for their main airport and surrounding small airports based on this solution expecting economies of scale. Airport Operators are interested in this solution for two main reasons: - Noise reduction in the areas close to the airport. Supporting then that capacity restrictions due to noise are mitigated and then improving quality of service to AUs - ROT reduction, leading to a potential increase in RWY capacity.
Passengers	No involvement in the validations.	Passengers will indirectly benefit from PJ02-02 as this solution will provide a capacity increase

	Interested in the results.	and could generate an increase in the destinations' availability
Communities around airports	No involvement in the validations. Interested in the results.	Communities around airports are interested into environmental benefits, especially noise, coming from the implementations of PJ02-02 solution
Airborne industry	Manufacturing Industry is running the exercises, providing operational expertise for the validations too	Manufacturing Industries are interested in assessing the impact on the crew on safety and HP point of view.
European Commission	Direct participation through SJU	EC is interested into improving the main KPA related to the ATM. Regarding PJ02-02 EC is interested in Capacity and Environment KPA possible benefits coming from solution implementation.

Table 4: Stakeholders' expectations


A.2 Benefits mechanisms

The benefit mechanisms of the solution have been developed separately for ground and air sides.

A.2.1 Ground benefits mechanisms

PJ.02-02 Enhanced Arrival Procedures / AO-0319 – SRAP

ANSP, Airport

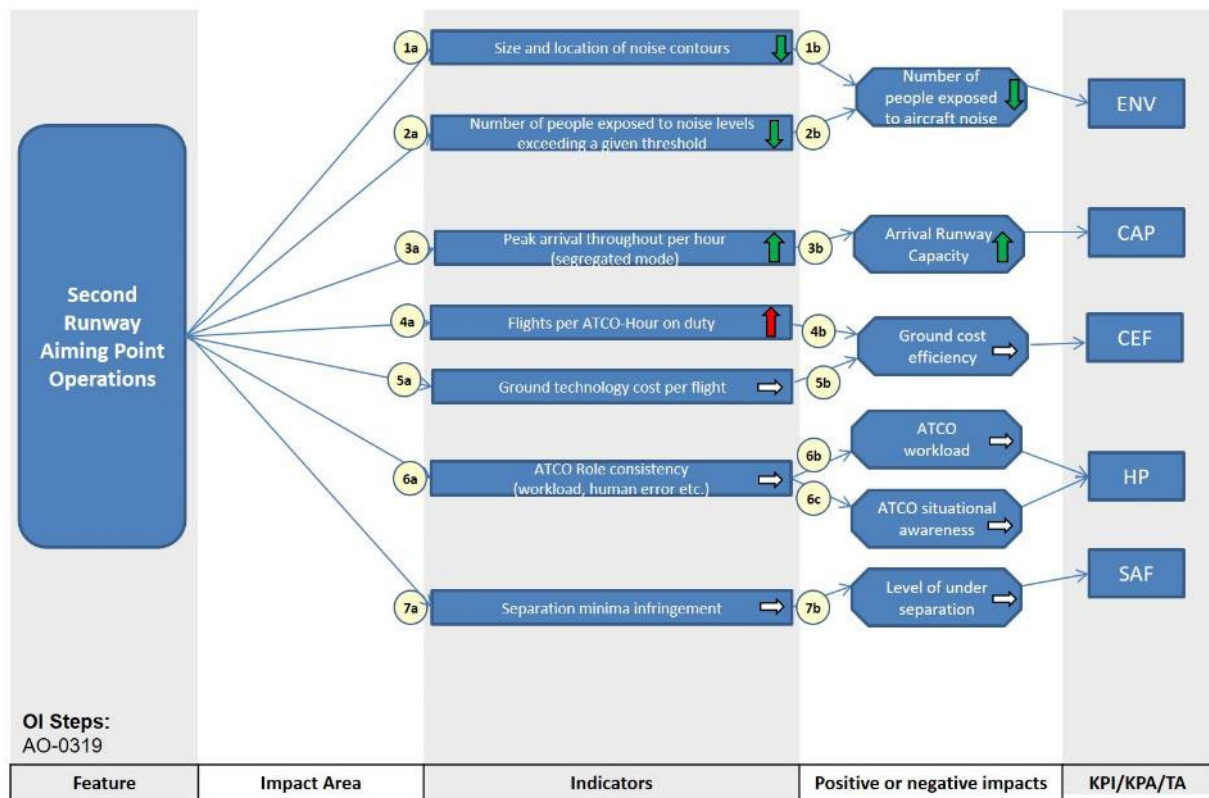

(1a) Once established on the glide path, at a given distance from the threshold, a flight following a SRAP procedure flies higher and further than a flight on the conventional approach procedure which would move the noise contours in final approach, and related various noise levels, towards the airport area.

(1b) This means the number of people in the airport vicinity exposed to aircraft noise below the final approach segment should decrease thanks to SRAP operations, which links to Environment KPA.

(2a) As described in (1a), SRAP operations would reduce the size of noise contours around the airport area which would lead to reduce the number of people exposed to noise levels exceeding a given threshold.

(2b) This means the number of people in the airport vicinity exposed to aircraft noise below final approach, and related various noise levels, will decrease thanks to SRAP operations, which links to Environment KPA.

(3a) Depending on the aircraft types, if the follower aircraft is flying a higher approach glideslope than the leading traffic, the wake turbulence separation between aircraft can be reduced, in particular behind large aircraft leader. For SRAP, the separation reduction depends on the distance between the thresholds, and the accuracy of the navigation technique (e.g. higher with GBAS or SBAS compared to APV-Baro). In some cases, when the lead aircraft is flying on the upper glide, the separation will however be increased. If the approach procedures are given to aircraft in a way to maximise the separation reductions compared to the cases when separations have to be increased, then the separation between aircraft pair is reduced on average. This is obtained when the Heavy / Super aircraft are assigned onto the 'lower' glide and most of the Medium/Light are assigned onto the 'upper' glide.

An arrival runway capacity increase between 2 and 6% is predicted

- when operating with a high percentage of usage of the SRAP (>75%)
- with benefits larger for major airports (with a high rate of Heavy and Medium aircraft)
- with benefits larger when operating RECAT-EU or RECAT-EU-PWS schemes.

(3b) As the separation between aircraft pair could be reduced on average, SRAP operations should increase the Arrival Runway Capacity which links to Capacity.

(4a) Linked to the average positive impact of SRAP operations on peak arrival runway throughput, the flights per ATCO-Hour on duty would as well be higher when activating SRAP operations.

(4b) That would not affect or affect positively the ground cost efficiency, and so the Cost Efficiency.

(5a) The wake separation tables to be used when SRAP operations are active are complex because depending on aircraft pairs, and on the glides flown by leader and following aircraft.

Some operational conditions may be identified when these separation tables could be simplified in order to be manageable by controllers without any support. Such conditions are to be determined at each airport level but encompass the following cases:

- When there are few wake turbulence categories operated at an airport (e.g. ICAO legacy), the complexity induced by the introduction of SRAP approaches may be lower and still manageable without controller separation support tool, only with the support of simpler separation rules/matrices (possibly reducing the capacity gains).

- When the local separation minima (or spacing for example during the night) applied at the considered airport are higher than the separations needed due to the introduction of SRAP approaches.

When these conditions cannot be met, a separation support tool will be necessary to help controllers manage the separations.

Nevertheless, it has to be noted that such a tool may be already in use due to the complexity of the separation tables applied even without SRAP operations. Thus, only an adaptation of the tool to take into account the particularities linked to SRAP operations may be needed.

817 In addition, SRAP operations increase the number of published approach procedures active at a time,
818 which may increase the complexity of some of the ATCO's tasks (For instance, optimisation of the
819 sequence to reduce as much as possible the average separation, monitor conformance to various glide
820 paths). ATCO's task performance (workload, Taskload) and situational awareness might be therefore
821 negatively impacted necessitating new ATC support tools.

822 In addition, as one new threshold has to be created on the runway, there is a need to implement the
823 additional visual aids (runway markings, approach lighting system and PAPI) to be built for that
824 threshold, generating ground costs.

825 In conclusion, the impact of SRAP introduction on the ground technology cost per flight might be
826 negative, increasing the ground technology cost per flight, but the impact would be lower in case a
827 separation assistance tool is already used by controllers because of the complexity of the separation
828 scheme of the airport.

829 (5b) That would negatively impact the ground cost efficiency, and so the Cost Efficiency.

830 (6a) As explained in (5a), either the separation tables to be applied can be locally simplified or a
831 controller separation support tool will be deployed to support controllers.

832 Therefore, it is expected that the workload and the human error are maintained at the same level as
833 today.

834 (6b) The ATCO workload would be maintained. Finally, no impact on Human performance KPA are
835 expected.

836 (6c) The ATCO situational awareness would be maintained. Finally, no impact on Human performance
837 KPA are expected.


838 (7a) As explained in (5a), either the separation tables to be applied can be locally simplified or a
839 controller separation support tool will be deployed to support controllers. So either the situation in
840 terms of separation minima infringement will be as today or it will be improved when a tool will be
841 used.

842 (7b) The number of under separation situations is thus expected to be as of today or reduced, and
843 Safety maintained.

844

845 A.2.2 Airside Benefits Mechanisms

PJ.02-02: Enhanced Arrival Procedures / AO-0319 - SRAP

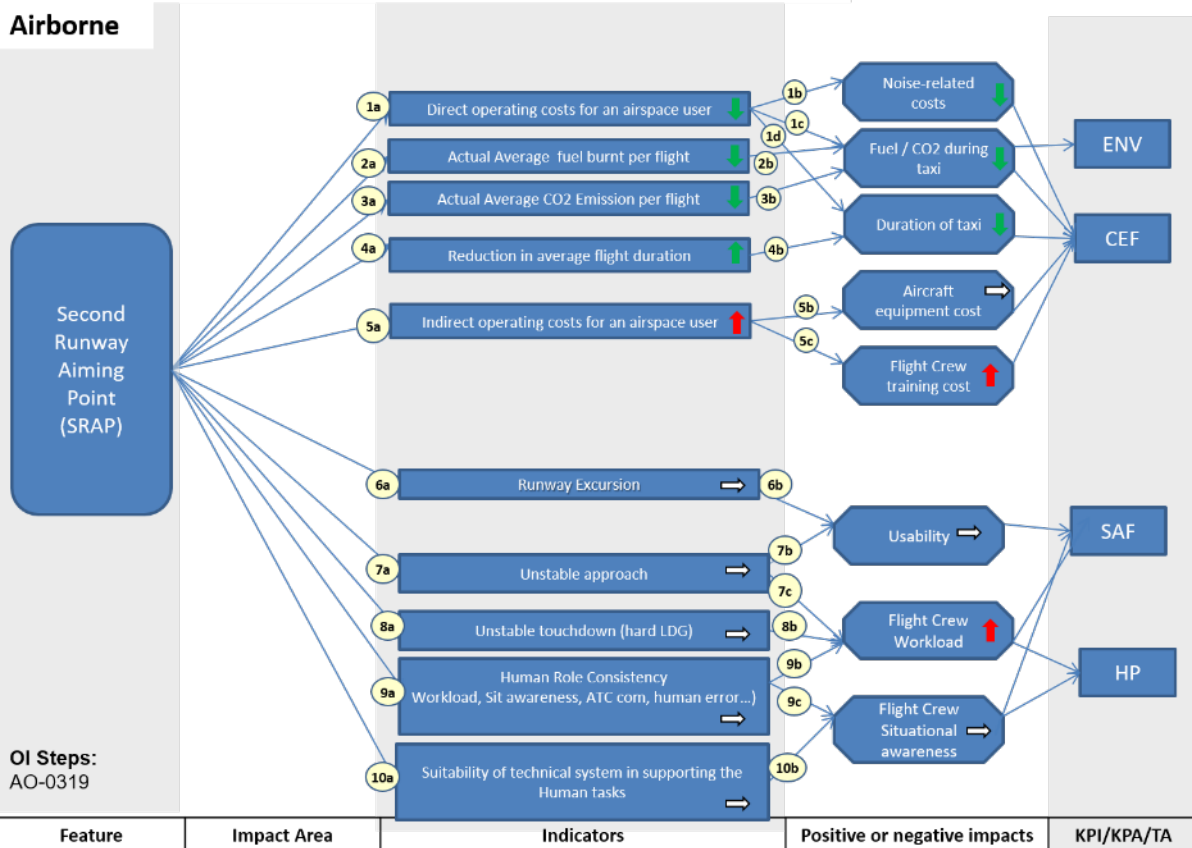

(1a) Noise benefits and potential taxi optimisation introduced by SRAP operations might be an enabler for direct operating cost reduction for airspace users.

(1b) Noise-related costs could be lowered through noise charges/fines reduction and alleviation of operational restrictions (curfew, early arrivals ...). This is dependent on local noise scheme (if defined by Airport and Local Authority), and how operational noise is considered as a key driver to contribute to the reduction of the airport environmental impact.

(1c) SRAP operations might be an enabler for reduced taxi distance and thus reduced fuel burnt during taxi. This depends on the airport layout and performance objectives when planning SRAP operations (e.g. priority to taxi optimization or wake separation reduction).

(1d) SRAP operations might be an enabler for reduced taxi distance and thus reduced taxi time. This depends on the airport layout and performance objectives when planning SRAP operations (e.g. priority to taxi optimization or wake separation reduction).

(2a) As explained in (1c), SRAP operations may enable a slight reduction in average fuel burnt per flight.

(2b) As explained in (1c), this could be achieved through a local SRAP implementation optimizing taxi distance and thus reducing Fuel burnt during taxi.

(3a) Just like fuel, SRAP operations may enable a slight reduction in average CO2 emissions per flight.

- 863 (3b) Just like fuel, this could be achieved through a local SRAP implementation optimizing taxi distance
 864 and thus reducing CO2 emissions during taxi.
- 865 (4a) As explained in (1d), SRAP operations may enable a slight reduction in average flight duration.
- 866 (4b) As explained in (1d), this could be achieved through a local SRAP implementation optimizing taxi
 867 distance and thus reducing taxi duration.
- 868 (5a) The introduction of SRAP operations may lead to a limited increase in indirect operating cost for
 869 airspace users mainly due to training costs.
- 870 (5b) No specific aircraft equipment or certification is required to fly SRAP approaches. Manufacturers
 871 may recommend the use of a runway overrun prevention function, but it cannot be mandatory since
 872 it is not required for current operations on shorter runways. Thus, no equipment costs are identified.
- 873 (5c) No specific flight crew training is required to fly SRAP approaches. However, to ensure an easy-to-
 874 use operation on a daily basis when SRAP operations get widely deployed, it seems necessary to
 875 reinforce pilots' training for such operations regarding the assessment of available landing distance as
 876 well as differences in visual references (runway marking & lightning, VASI/PAPI, etc). Thus, training
 877 costs would slightly increase.
- 878 (6a) Second runway aiming points SRAP should not affect the runway excursion rate.
- 879 (6b) Pilots are used to compute the landing distance available for each approach. They will be made
 880 aware during the training that this latter is reduced. By construction, the SRAP threshold is defined
 881 considering the aircraft categories that can land vs the available landing distance. Moreover,
 882 appropriate runway markings & lightings should be provided to the crew. So SRAP should not have any
 883 impact on runway excursions.
- 884 (7a) SRAP operations should not increase the rate of unstable approach and then of Go-around.
- 885 (7b) SRAP operations meaning a shift profile further down the runway there is no negative impact on
 886 aircraft deceleration capability and it is expected to be maintained at the same level of current
 887 operations.
- 888 (7c) SRAP operations are just a shift of approach profile further down the runway. So, the usability may
 889 remain unchanged.
- 890 (8a) SRAP operations should not impact the flare manoeuvre.
- 891 (8b) SRAP operations should impact the flight crew workload, but the effect is to be determined
 892 through RTS.
- 893 (9a) SRAP effect on Human role consistency is to be determined through RTS.
- 894 (9b) SRAP operations do not require any new or different communication between the flight crew and
 895 the ATC. However, the Flight Crew need to properly identify the applicable runway marking & lighting
 896 in order to avoid misleading with the regular aiming point on the same runway. SRAP solution should
 897 ensure it. Therefore, the flight crew workload should slightly be increased.

898 (9c) SRAP effect on crew Perceived Subjective Situational Awareness is to be determined through RTS.

899 (10a) The flight crew should not need any additional technical on-board system for SRAP operations,
900 but visual aids (marking, lighting, PAPI/VASI) for the second threshold will be developed to support
901 landing on that threshold.

902 (10b) The adequacy of visual Aids (VASI/PAPI) provided to the Flight crew when flying SRAP operations
903 are expected to potentially negatively impact the crew situational awareness when combined with a
904 standard approach operation. Indeed, a single visual aid may exist for the standard approach so not
905 appropriate for SRAP threshold. Or, in case of switching of visual aids between the two thresholds
906 when two aircraft following each other do not follow the same approach (SRAP vs standard). This
907 means that pilot situational awareness may be negatively impacted, even though this may need to be
908 confirmed.

909 A.3 Costs mechanisms

910 PJ02 W2 solution 14.2 uses the costs mechanisms developed by PJ02-02. They used the cost
911 categorisation defined by SESAR PJ19 W1, as well as the tables developed by that project. The table
912 below shows where costs have been identified per stakeholder, the detail of the costs is available in
913 the CBA document.

914 Please note that as no costs have been identified for Military or NM stakeholders, they have been
915 suppressed from all tables.

Category	Sub-category	Cost type	Description	Airspace Users		ANSP	Airports	Other Stakeholder
				Airborne costs (Forward Fit and Retrofit per aircraft)	Ground costs (per AOC - Airline Operation Centre)			
Pre-implementation Costs								
R&D and Pre-Industrialisation costs are already incurred in the SESAR Development Phase and therefore not included in the cost assessment								
Implementation Costs								
	One-Off Costs		costs incurred during the implementation period and that are paid once					

Category	Sub-category	Cost type	Description	Airspace Users		ANS P	Airports	Other Stakeholder
				Airborne costs (Forward Fit and Retrofit per aircraft)	Ground costs (per AOC - Airline Operation Centre)			
		Initial Training & Staffing	Initial Staffing Initial Training Training Material Training simulator	X		X	X	
		Project Management	Project Definition, Programme management and support, Planning costs, including design costs, planning authority resources and other planning costs Change management Procurement activities Meeting/ travel costs Processes and documentation costs	X		X	X	
		Airspace design & Procedures	Changes to airspace design Changes to and design of new ATC and flight procedures LoAs			X	X	
		Administrative costs	New procedures, regulation, processes to put in place Documentation	X		X	X	

Category	Sub-category	Cost type	Description	Airspace Users		ANS P	Airpor ts	Other Stakehold er
				Airborn e costs (Forwa rd Fit and Retrofit per aircraft)	Ground costs (per AOC - Airline Operati on Centre)			
		Installation & Commissioning	Installation costs, Initial Test and evaluation (<i>Test plans, procedures, reports ; Test equipment/tools, including aircraft ; Test staff and training</i>) Functional integration (<i>standardisation</i>) Human/product interface			X	X	
		Validation & Certification costs	Validation Safety assessments / audits			X	X	
		Other One-off Costs	Costs not covered by any of the other categories. Please describe them					
	Capital Costs							
		Equipment & System	Hardware and software acquisition, Software development (<i>development, engineering, knowledge base: adaptation data, production, reviews and audit</i>) Initial software licensing			X	X	

Category	Sub-category	Cost type	Description	Airspace Users		ANS P	Airports	Other Stakeholder
				Airborne costs (Forward Fit and Retrofit per aircraft)	Ground costs (per AOC - Airline Operation Centre)			
		Integration costs	Physical integration Software development System integration			X	X	
		Building & Facilities	Architecture, engineering, and construction of special facilities					
		Land & property costs	Land acquisition and land restitution costs (including demolition, land clearance, site preparation, removal of redundant equipment/facilities, etc) Construction costs (incl. professional fees) Contingencies					
		Licences, patent						
		Other Capital Costs	Costs not covered by any of the other categories. Please describe them					
	Transition Costs		Costs for maintaining current systems, during transition to a new system					

Category	Sub-category	Cost type	Description	Airspace Users		ANS P	Airports	Other Stakeholder
				Airborne costs (Forward Fit and Retrofit per aircraft)	Ground costs (per AOC - Airline Operation Centre)			
		Transition Investments costs						
		Transition Operations costs						
		Transition Staff costs						
		Other						
Operating costs (includes only delta costs , i.e. changes to the operating costs that this project(s) will bring when deployed)								
	Raw Material							
		Material, supplies, utilities						
	Personal & Training		Change in costs for staff, training due to operational improvements implemented					
		Personnel cost	Salary & wages and other benefits such as health insurance, conveyance allowance, etc.					

Category	Sub-category	Cost type	Description	Airspace Users		ANS P	Airports	Other Stakeholder
				Airborne costs (Forward Fit and Retrofit per aircraft)	Ground costs (per AOC - Airline Operation Centre)			
		Training	Training (new staff)	X		X	X	
		Staff support						
	Maintenance & Repair							
		Hardware & Software	Hardware and Software maintenance and repair			X	X	
		Other services	External contract fees to maintain the system					
	Facility costs							
		Rent & Lease	Rent or Lease payments Office space rent					
		Furniture & equipment						
		Communication costs						
		Energy						
		Property Taxes	Property taxes and equivalent assessments Operations taxes					
	Administration Costs							
		Standard expenditures related to changes in procedures,		X		X	X	

Category	Sub-category	Cost type	Description	Airspace Users		ANSP	Airports	Other Stakeholder
				Airborne costs (Forward and Retrofit per aircraft)	Ground costs (per AOC - Airline Operation Centre)			
		regulation, processes						
		Documentation						
		Travel						

916

Appendix B Description of SRAP Operations

SRAP concept consists in having two runway thresholds active at the same time on a runway, with both final approach segments following an ILS conventional slope (usually 3°).

Having two arrival slopes active at the same time, it can be envisaged to have one or two interception altitudes, according to each local case. The figures below show the two cases.

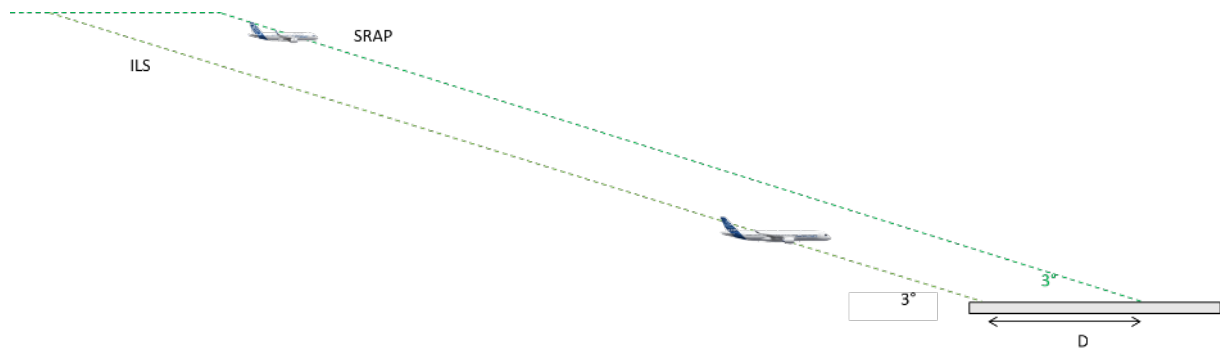


Figure 6: SRAP procedure with one interception altitude

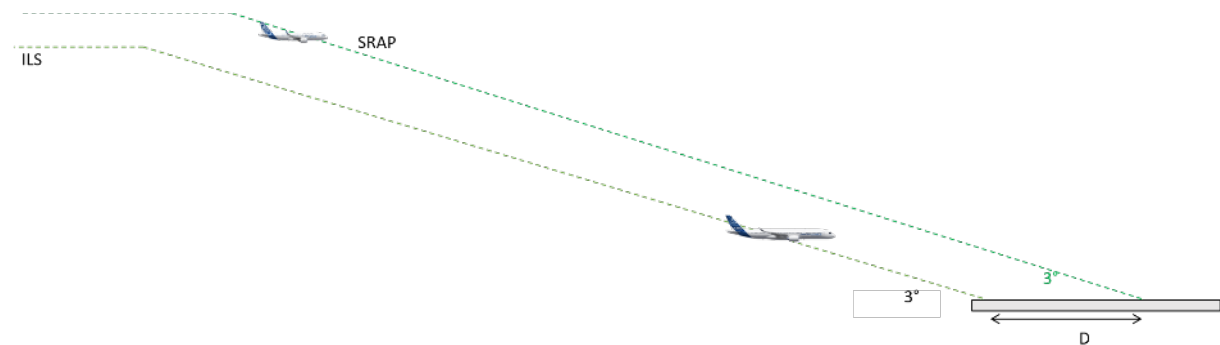


Figure 7: SRAP procedure with two interception altitudes

Appendix C Separation design for SRAP

When using SRAP, the aircraft positioned on the “modified” glide are flying above those flying on the conventional (e.g. ILS) glide, at least for a part of the glide. Because vortices are sinking (and also rebounding back to about their generation altitude when generated close to the ground), the probability to encounter a wake generated by a preceding aircraft flying on the ILS is lower when flying on the “modified” glide than if both aircraft were flying on the same glide. They are therefore better protected in terms of WVE risk. On the contrary, aircraft flying on the ILS behind a preceding aircraft flying on the modified glide are more exposed.

The wake vortex encounter risk related to SRAP therefore depends on the difference in altitude of the two considered glides. This altitude difference also depends on the uncertainty in aircraft vertical positioning when flying on the ILS or on a modified glide (where ILS, GBAS, SBAS, or RNAV is used for navigation and surveillance).

Based on these arguments and using a relative approach with current operations as baseline, the rules of wake separation design for SRAP is here established. This also enables us to determine whether SRAP procedures are favourable in terms of capacity (in addition to noise benefits) for all types of pairs.

In order to generalize the analysis, all analyses are performed depending on the mean altitude difference between the two considered glides at a certain position. The reasoning behind that glide altitude difference (i.e. the investigated SRAP concept and parameter values) is then no longer required. However, the navigation uncertainty related to the used navigation system (GBAS, SBAS or RNAV) has an impact on the wake risk. The wake separation design will hence be provided by the altitude difference and by the navigation system.

C.1 Risk assessment methodology

For wake separation design, two altitudes of wake evolution have to be considered, illustrated in Figure 8:

- The Out-of-Ground Effect (OGE) region (typically for wake evolving above 1 generator wingspan)
- The In Ground Effect (IGE) region (typically for wake evolving below 1 generator wingspan)

In the OGE region, the vortices sink due to their mutual interaction and are transported by the wind. Their decay is slower compared to the IGE region and is influenced by the atmospheric turbulence and stratification.

In the IGE region, due to the interaction with the ground, the vortices first sink and then rebound potentially back to their generation altitude or even above. The decay is stronger compared to the OGE region due to the interaction of the vortices with the ground generated boundary layer. The closer the vortices from the ground, the stronger is their decay.

For wake separation design, it has been agreed at ICAO level that the Reasonable Worst Case (RWC) corresponds to long lasting wakes generated at one generator wing span. This is valid for two trailing aircraft following the same glide. When using two glides, the OGE region has also to be considered especially when the follower is on a lower glide compared to the leader.

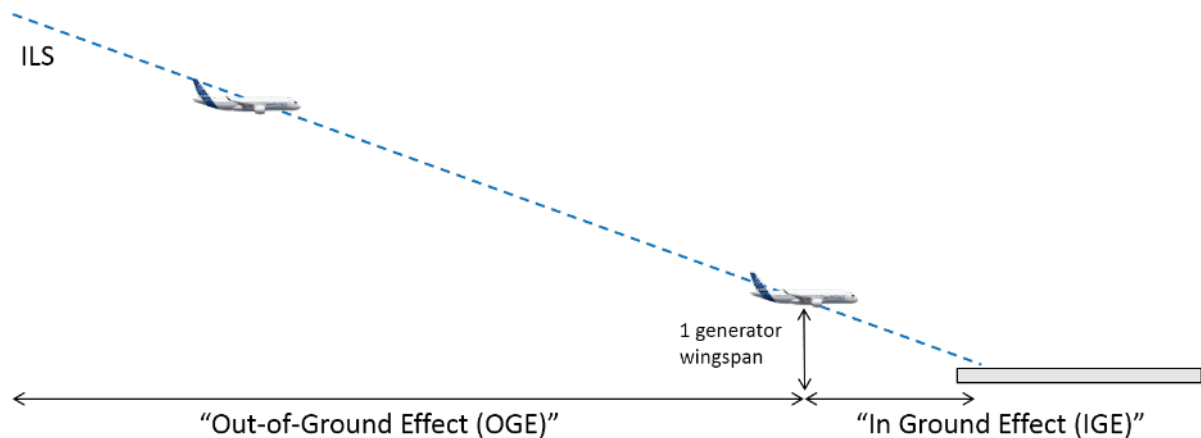


Figure 8: description of the two regions of wake evolution

The wake vortex severity is assessed computing the induced Rolling Moment coefficient (RMC), as formulated in RECAT-EU-PWS (see (De Visscher, Winckelmans, & Treve, 2015)) accounting for the wake strength and for the follower resistance to the encounter (through its speed and wing geometry). Long lasting wake strength is considered.

The wake encounter frequency effect is accounted for the IGE region for which the Complementary Cumulative density Function (CCDF) of RMC are compared between the test case (i.e. operation of SRAP IGE) and an acceptable baseline (i.e. current operations);

The wake encounter frequency effect is not taken into account for the OGE region since the operation of aircraft on an upper glide significantly increases the exposure of the follower aircraft (on a lower glide) all along the glide. The assessment is thus performed on an absolute basis using an absolute RMC threshold found “acceptable” in the EUROCONTROL WISA Flight simulator campaign.

For the IGE assessment, the separations are provided as a function of the glide altitude difference for a wake generated at 1 generator wing span altitude.

C.2 LiDAR data description and processing

This assessment is performed using three LiDAR databases described in (De Visscher, Stempfel, & Jacques, October 2017):

- EGLL-IGE database for characterisation of Cat-B and Cat-C wake evolution in ground proximity
- EGLL-OGE database for characterisation of Cat-B, Cat-C wake evolution OGE
- CDG LiDAR database for characterisation of Cat-D, Cat-E wake evolution OGE

The LiDAR data were first filtered and processed in order to be able to evaluate the probability to encounter a vortex of a certain strength in a certain position after a certain time.

Because a lot of tracks have only limited measured time and in order to smooth the wake circulation evolution, the 4-parameter decay model, described in (Bourgeois, Choroba, & Winckelmans, 2012), is applied on each measured track. It also enables some filtering of the tracks. Are excluded:

- tracks with lasting time smaller than 30s
- tracks for which the fitting algorithm did not converge

- tracks with a circulation increase evolution
- tracks with an initial circulation that deviates by more than 40% from the median measured initial circulation when considering all tracks of a specific aircraft type.

For IGE data, the RWC tracks are selected based on their lasting time with a $5 t_0$ selection criterion using t_0 values computed in RECAT-EU-PWS. The tracks are also shifted in time so as to be at one generator wing span at time=0. The vortex altitude evolution is extrapolated using a linear extrapolation based on the last 4 points of measurements with a conservative capping at the last measured altitude (i.e., if the extrapolation provides a value lower than the last measured altitude, the values are conservatively set to the last measured altitude).

For OGE data, the RWC tracks are selected based on their lasting time with a $5 t_0$ selection criterion using t_0 values computed from the measured initial circulation and assuming $s=\pi/4$.

C.3 Navigation uncertainty

Based on personal exchanges with navigation experts from EUROCONTROL and Airbus, the following navigation uncertainties have been determined and are used in what follows.

When using ILS, GBAS or SBAS, the navigation performances are equivalent. At 1 NM from the runway threshold, typical value of Total System Error (TSE) is 13 m in vertical position and 35 m in lateral position. When using RNAV, those values are larger reaching a TSE vertical of 26 m and a lateral TSE of 148 m.

Note that on the lateral precision, the value has to be bounded by the runway half width (typically 45 m).

C.3.1 Wake separation design for leader on ILS

This section describes the methodology for wake separation design for SRAP operations behind a leader on a conventional (i.e. ILS) glide.

IGE assessment methodology

The first case that is here investigated concerns ILS approach followed by SRAP with a certain altitude difference ΔH and a certain navigation uncertainty providing a certain difference between the two glide altitudes when the leader is at one wing span altitude. This is illustrated in Figure 9. For wake separation design, the reference altitude of wake generation corresponds to one wingspan generator. We thus here consider vortices generated at one wing span altitude potentially impacting aircraft flying SRAP on a glide located $\Delta H + TSE_{vert}$ above, see illustration in Figure 10.

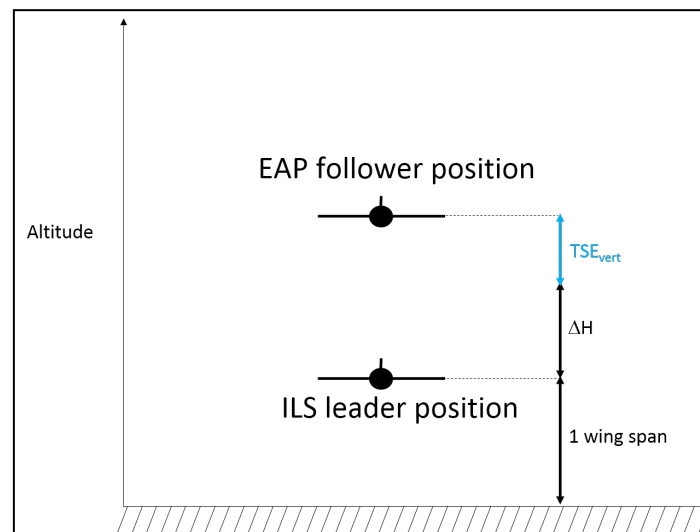


Figure 9: schematic view of ILS and SRAP region of flight

For that situation, vortices generated by the leader on the ILS glide might rebound above the glide in a region where the follower could be (i.e. ΔH above the ILS glide altitude). The wake vortex encounter area hence corresponds to the region located ΔH above the ILS glide altitude, see Figure 10.

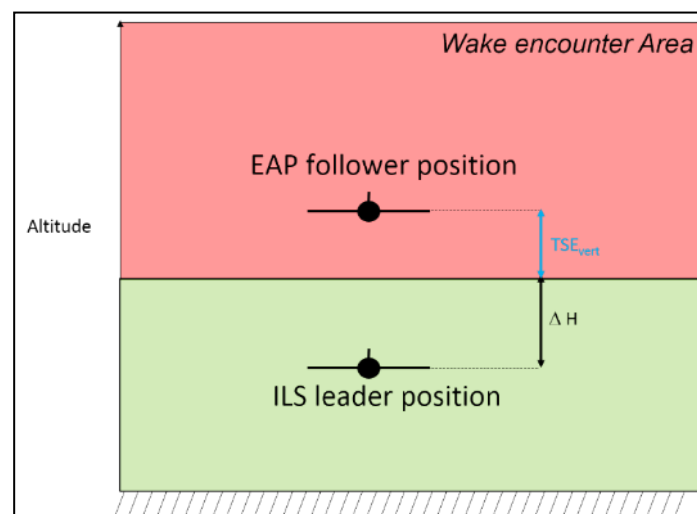


Figure 10: schematic view of SRAP wake analysis for close to ground effect region

In order to perform a relative safety assessment, this situation has to be compared to an acceptable baseline. Here, we chose two aircraft on the same ILS glide. For that situation, the follower can encounter any vortex present above the glide altitude reduced by $TSE_{vert, ILS}$, see Figure 11. This defines the wake vortex encounter area for the baseline case.

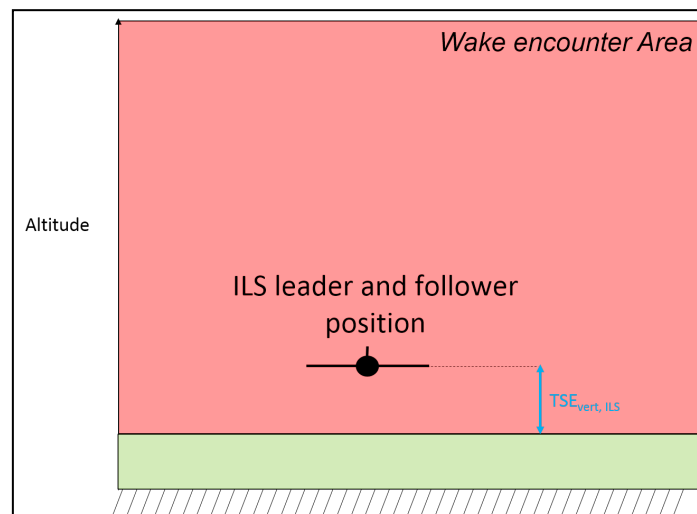


Figure 11: schematic view of baseline for SRAP wake analysis for close to ground effect region

The wake encounter risk associated to the test case and the baseline case is expressed as the CCDF of RMC found in the wake vortex encounter area at a certain time separation.

For each ΔH value, the CCDF of the test case for various time separation reduction values is compared to the baseline CCDF curve defined as the CCDF of RMC computed at the nominal separation time. The allowed time separation reduction then corresponds to that leading to a test CCDF curve below the baseline one at least for RMC values above the RMC threshold. The RMC threshold is set to 0.08 which is the maximum value enabling safe go-around according to WISA campaign in ground proximity (200 ft).

Since we compare the results only depending on the leader for a same follower aircraft type, the RMC is here directly linked to the vortex circulation. The maximum circulation corresponding to the RMC threshold is then computed as the minimum circulation leading to that RMC threshold value per RECAT-EU category pair and based on a sample of the 96 most frequent aircraft types in Europe for which data were collected in the framework of RECAT-EU-PWS. The circulation thresholds values corresponding to RMC=0.08 are provided in Table 5.

Leader/Follower	Cat-A	Cat-B	Cat-C	Cat-D	Cat-E	Cat-F
Cat-A	813	553	414	355	249	217
Cat-B	786	528	386	328	223	183
Cat-C	756	502	356	300	194	143
Cat-D	749	496	349	293	188	134
Cat-E	729	479	330	276	169	113
Cat-F	721	471	322	269	161	104

Table 5: Circulation thresholds corresponding to RMC=0.08 for each RECAT-EU category pair

The analysis is based on the EGLL-IGE LiDAR data analysis. Given the traffic mix of the database, the assessment is only performed for Cat-B and Cat-C leader aircraft types. For the other aircraft types, the obtained results are extended from those results.

For Cat-B and Cat-C aircraft types, the following baseline time separations are considered:

- 70 s for a 3NM separation minimum
- 100 s for a 4 NM separation minimum
- 120 s for a 5 NM separation minimum
- 150 s for a 6 NM separation minimum
- 180 s for a 7 NM separation minimum


The results are obtained for a time resolution of 5 s and a ΔH resolution of 5 m.







IGE Results

The allowed time separation reduction when operating SRAP behind ILS approach, depending on the glide altitude difference is assessed by comparing for each pair type the distribution of RMC compared to that of the baseline (i.e. two consecutive ILS approaches). The allowed separation reduction is that providing a RMC distribution below the baseline one at least for RMC values below the RMC threshold value (with a tolerance of one data point).

Figure 12 provides an example of the track processing enabling the CCDF computation for a baseline time separation of 120s with 65 m generator, $\Delta H=10$ m and a time separation reduction of 30s. In those 5 examples:

- Case 1 (top left): no vortex found neither for baseline nor test case
- Case 2 (top right): vortex found at or before time separation minima for baseline but not for test case
- Case 3 (row 2 left): vortex found after time separation minima for baseline but not for test case
- Case 4 (row 2 right): vortex found at or before time separation minima for both baseline and test case
- Case 5 (bottom): vortex found at or before time separation minima for baseline but after time separation minima for test case.

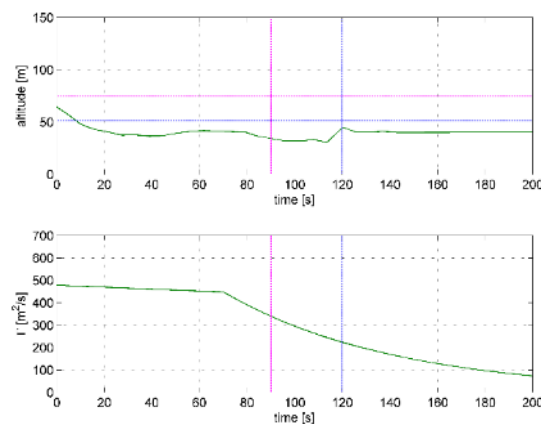

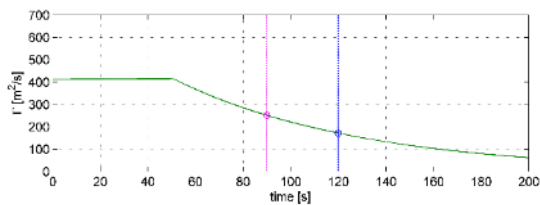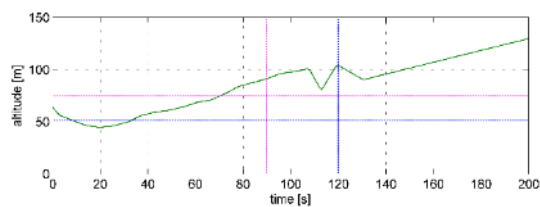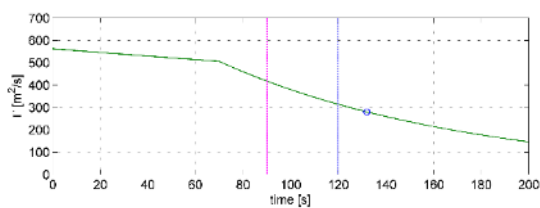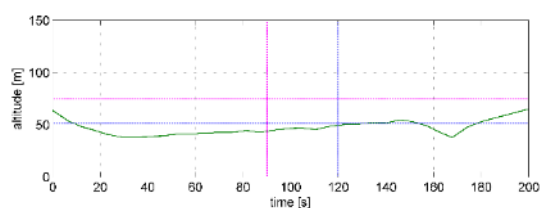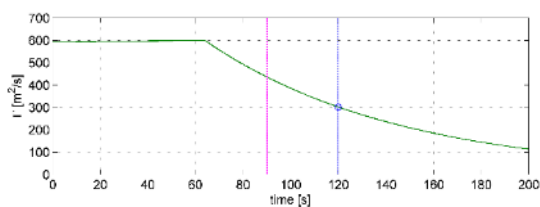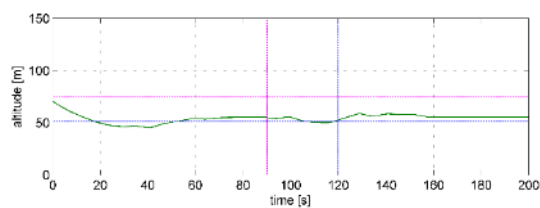

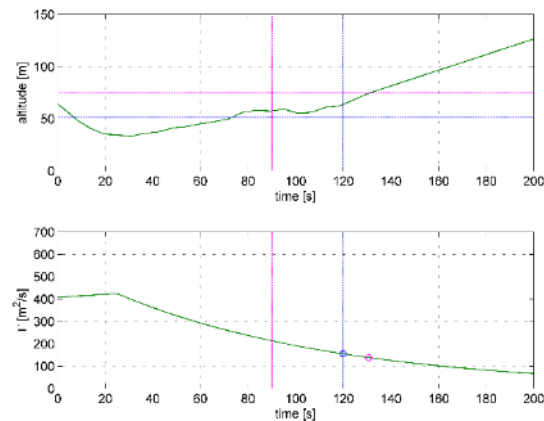


Figure 12: Example of 5 tracks providing altitude (top) and circulation (bottom) evolution. Comparison of test case and baseline for baseline time of 120s, $\Delta H=10$ m and a time separation reduction of 30s. The blue (resp. magenta) circle indicates the circulation value considered for the baseline (resp. test case)

Cat-B leaders

Figure 13 to Figure 21 provide examples of CCDF (RMC) comparison when operating SRAP behind an ILS approach for various ΔH values and for Cat-B leaders.



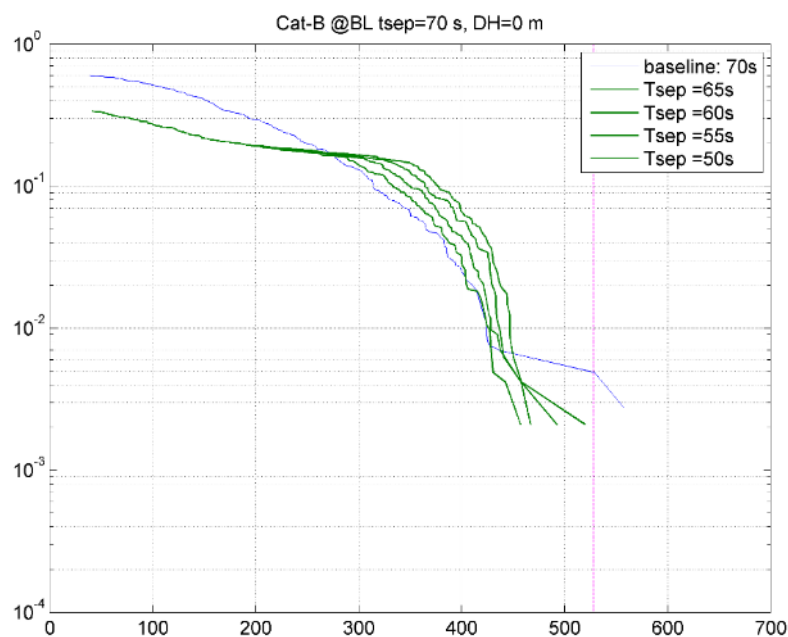


Figure 13: CCDF (RMC) for CAT-B-CAT-B with leader on ILS @ one wind span altitude and follower following SRAP DH=0 m above the ILS with various separation reductions compared to the baseline time separation (70 s)

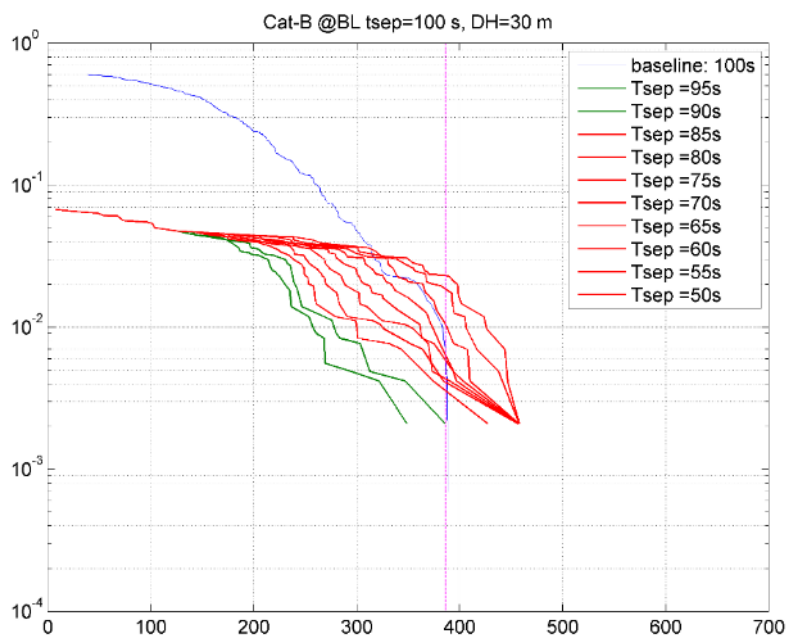

1098


1099 **Figure 14: CCDF (RMC) for CAT-B-CAT-C with leader on ILS @ one wind span altitude and follower following**
 1100 **SRAP DH=30 m above the ILS with various separation reductions compared to the baseline time separation**
 1101 **(100 s)**

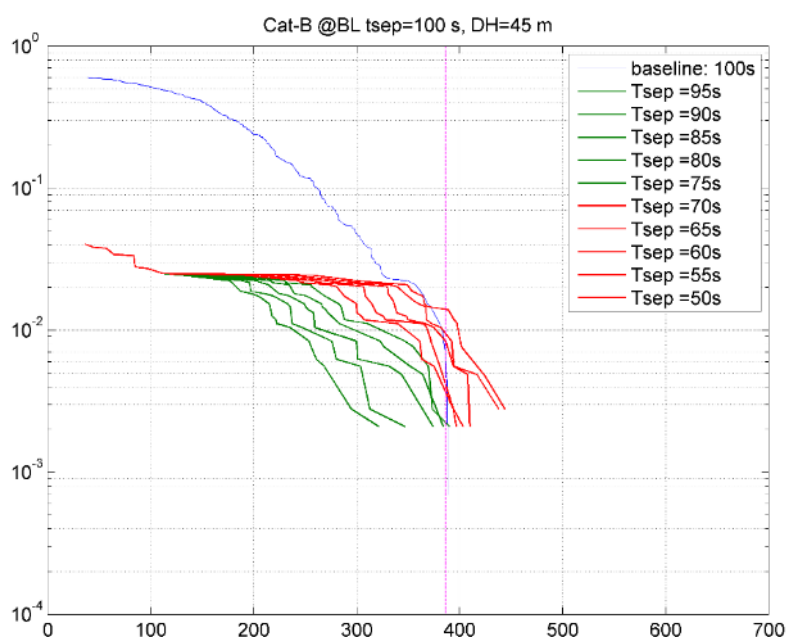

1102


1103 **Figure 15: CCDF (RMC) for CAT-B-CAT-C with leader on ILS @ one wind span altitude and follower following**
 1104 **SRAP DH=45 m above the ILS with various separation reductions compared to the baseline time separation**
 1105 **(100 s)**

1106

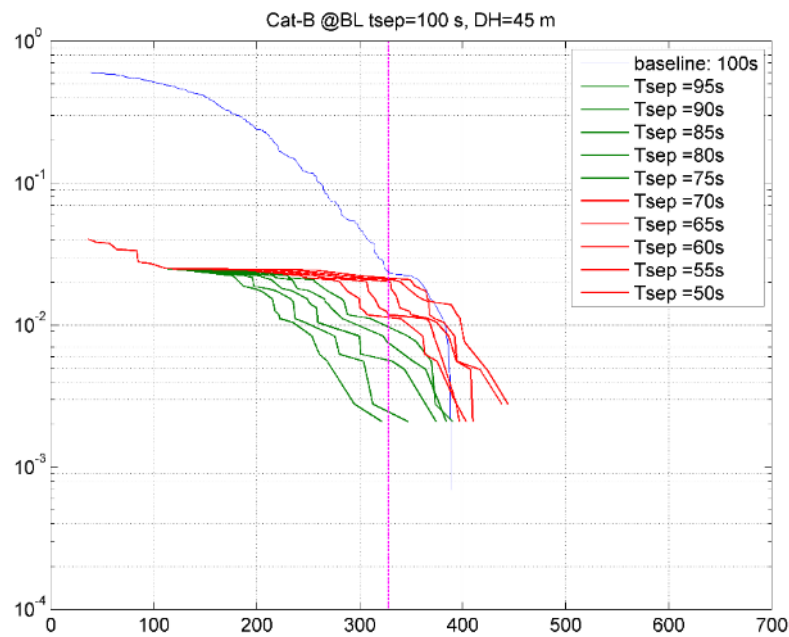

1107


1108 **Figure 16: CCDF (RMC) for CAT-B-CAT-D with leader on ILS @ one wind span altitude and follower following**
 1109 **SRAP DH=45 m above the ILS with various separation reductions compared to the baseline time separation**
 1110 **(100 s)**

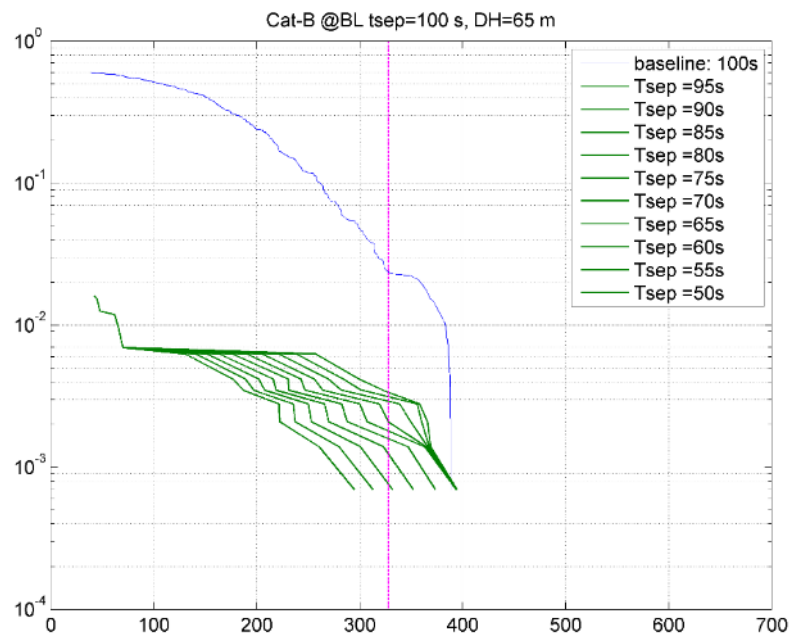

1111

1112 **Figure 17: CCDF (RMC) for CAT-B-CAT-D with leader on ILS @ one wind span altitude and follower following**
 1113 **SRAP DH=65 m above the ILS with various separation reductions compared to the baseline time separation**
 1114 **(100 s)**

1115

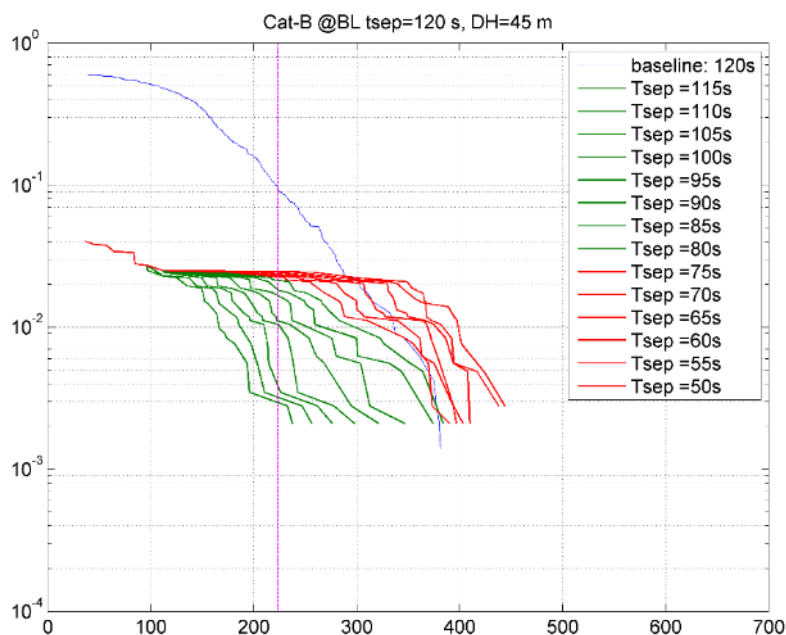


1116

1117 **Figure 18: CCDF (RMC) for CAT-B-CAT-E with leader on ILS @ one wind span altitude and follower following**

1118 **SRAP DH=45 m above the ILS with various separation reductions compared to the baseline time separation**

1119 **(120 s)**

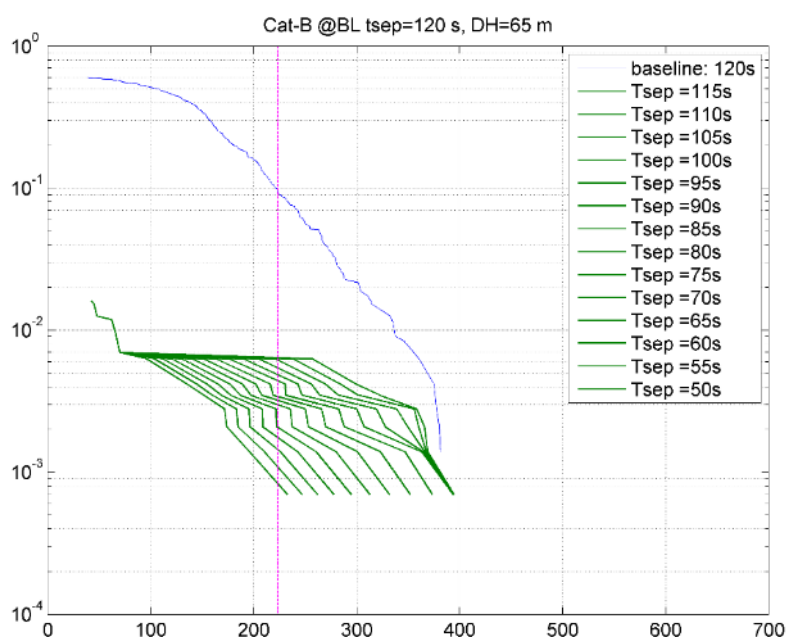

1120

1121 **Figure 19: CCDF (RMC) for CAT-B-CAT-D with leader on ILS @ one wind span altitude and follower following**

1122 **SRAP DH=65 m above the ILS with various separation reductions compared to the baseline time separation**

1123 **(120 s)**

1124

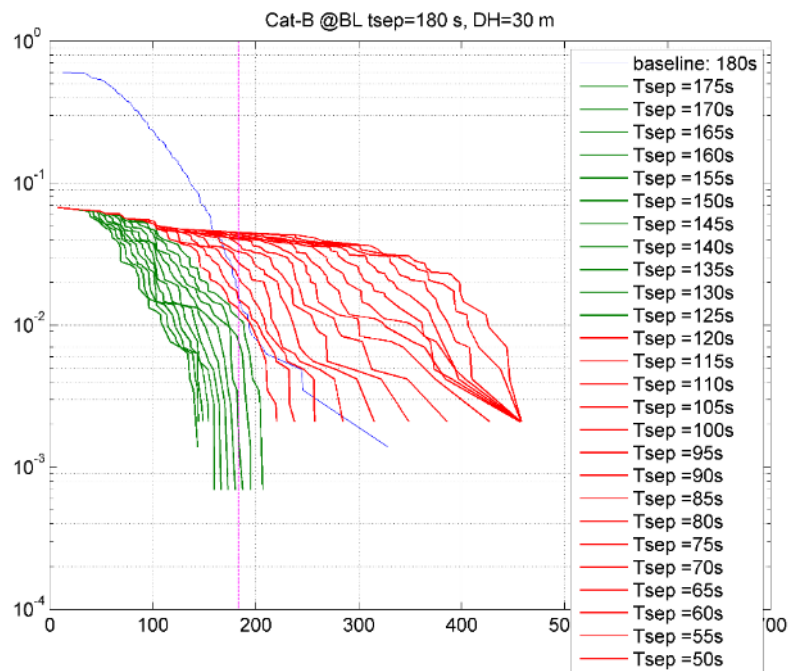


Figure 20: CCDF (RMC) for CAT-B-CAT-F with leader on ILS @ one wind span altitude and follower following SRAP DH=30 m above the ILS with various separation reductions compared to the baseline time separation (180 s)

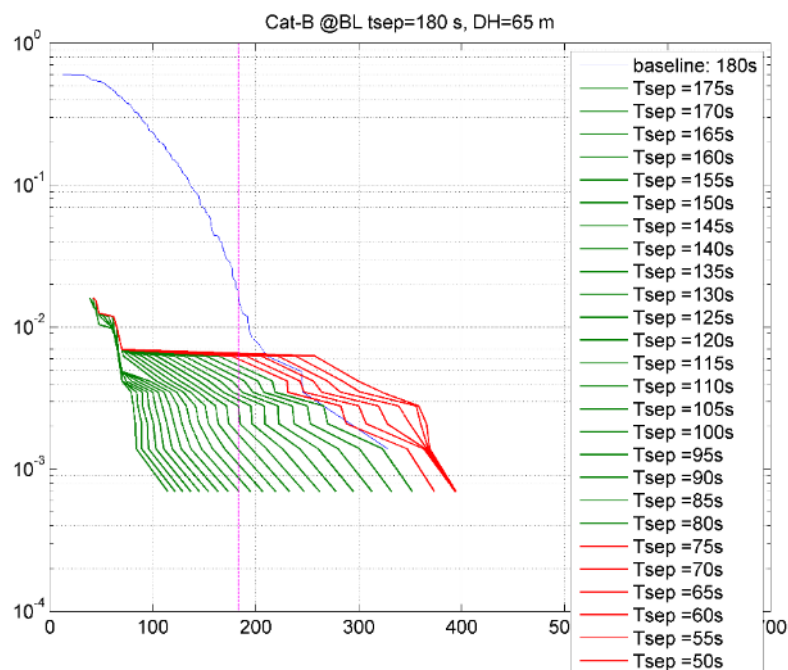


Figure 21: CCDF (RMC) for CAT-B-CAT-F with leader on ILS @ one wind span altitude and follower following SRAP DH=65 m above the ILS with various separation reductions compared to the baseline time separation (180 s)


1133 Table 6 provides the obtained allowed time separation reductions for CAT-B leaders following the ILS
 1134 and Cat-B, Cat-C, Cat-D, CAT-E and CAT-F followers following a SRAP procedure.

DH [m]/Follower	Cat-B 70s	Cat-C 100 s	Cat-D 100 s	Cat-E 120 s	Cat- F 180 s
0	50	100	100	115	175
5	50	100	100	110	160
10	50	95	95	100	150
15	50	90	90	90	145
20	50	90	90	90	140
25	50	90	90	90	125
30	50	90	90	90	125
35	50	90	90	90	120
40	50	90	90	90	115
45	50	75	75	80	110
50	50	75	75	80	110
55	50	75	75	75	110
60	50	65	65	70	100
65	50	50	50	50	80
70	50	50	50	50	80
75	50	50	50	50	50

1135 Table 6: Allowed time separation minima [s] behind Cat-B depending on ΔH value and for various followers

1136 Cat-C leaders

1137 Figure 22 to Figure 27 provide examples of CCDF (RMC) comparison when operating SRAP behind an
 1138 ILS approach for various ΔH values and for Cat-C leaders.

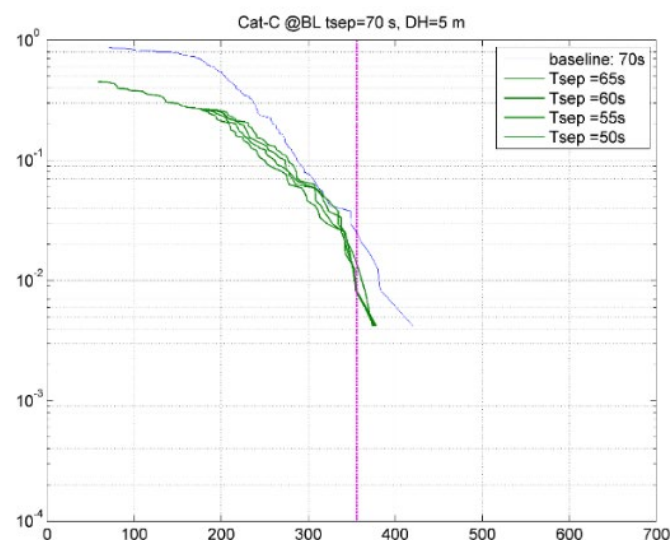

1139
 1140 Figure 22: CCDF (RMC) for CAT-C-CAT-C with leader on ILS @ one wind span altitude and follower following
 1141 SRAP DH=5 m above the ILS with various separation reductions compared to the baseline time separation
 1142 (70 s)

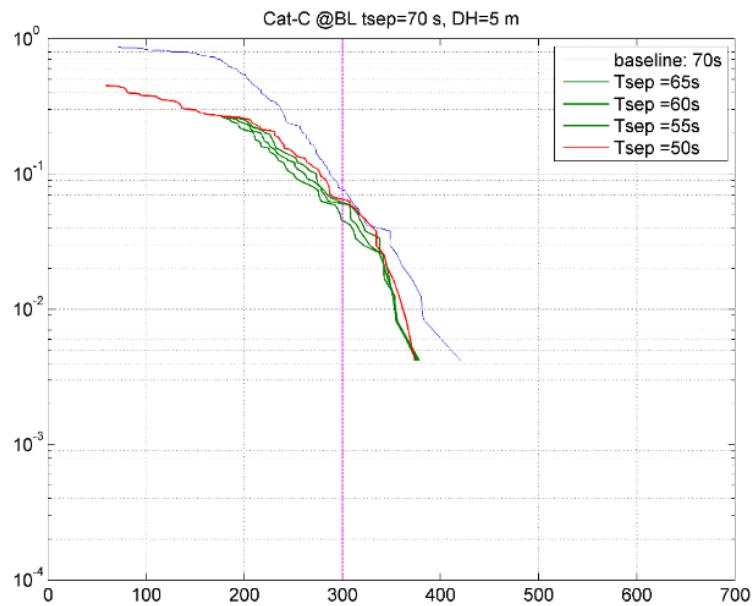


Figure 23: CCDF (RMC) for CAT-C-CAT-D with leader on ILS @ one wind span altitude and follower following SRAP DH=5 m above the ILS with various separation reductions compared to the baseline time separation (70 s)

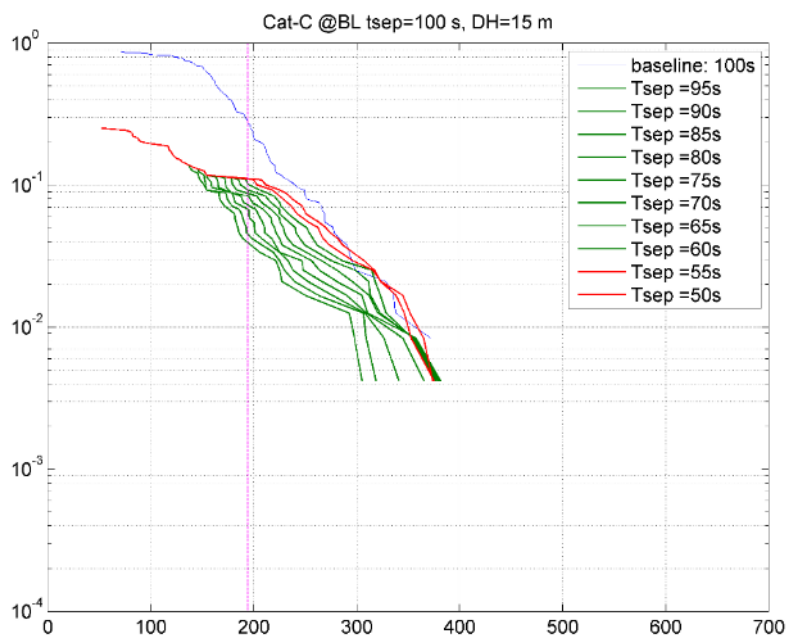


Figure 24: CCDF (RMC) for CAT-C-CAT-E with leader on ILS @ one wind span altitude and follower following SRAP DH=15 m above the ILS with various separation reductions compared to the baseline time separation (100 s)

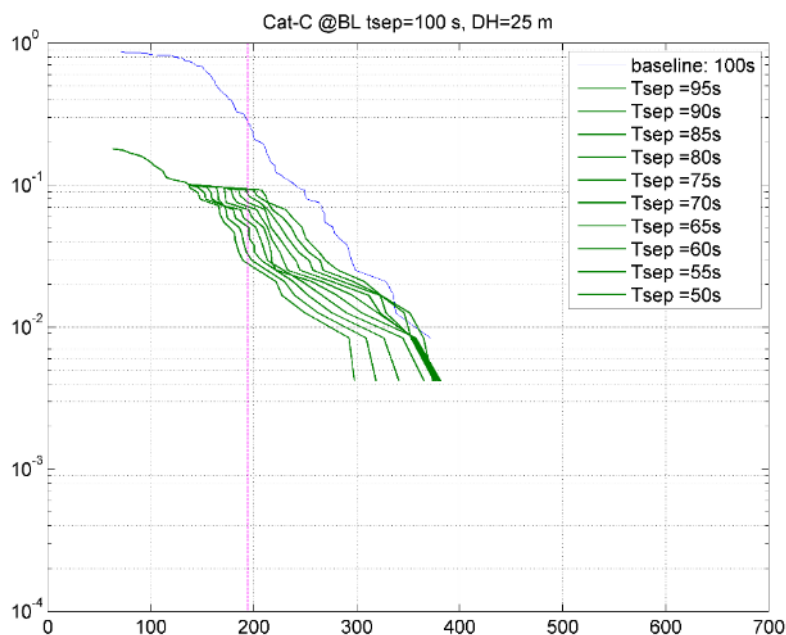


Figure 25: CCDF (RMC) for CAT-C-CAT-E with leader on ILS @ one wind span altitude and follower following SRAP DH=25 m above the ILS with various separation reductions compared to the baseline time separation (100 s)

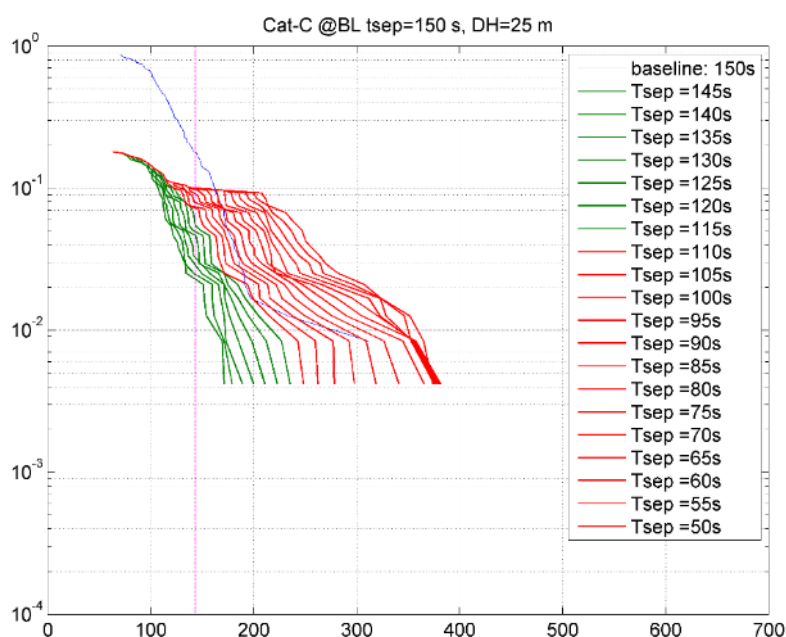


Figure 26: CCDF (RMC) for CAT-C-CAT-F with leader on ILS @ one wind span altitude and follower following SRAP DH=25 m above the ILS with various separation reductions compared to the baseline time separation (150 s)

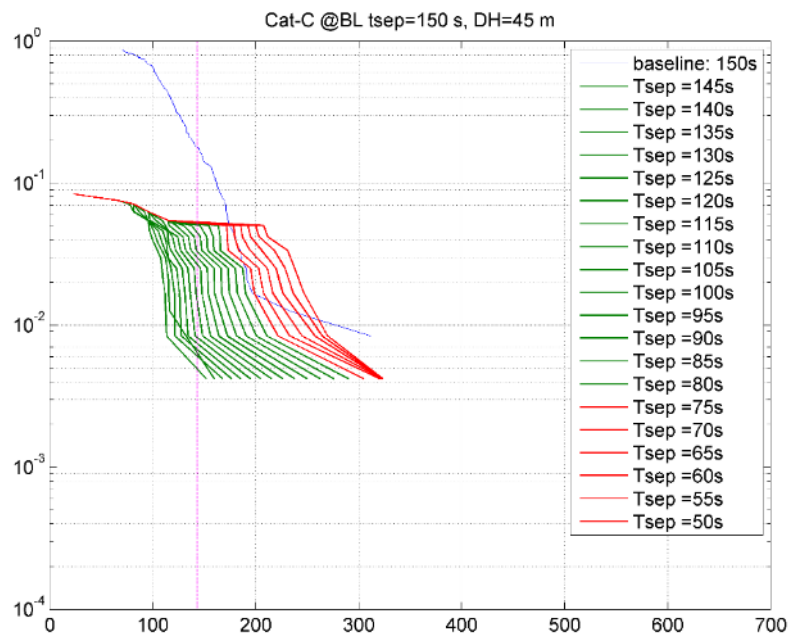


Figure 27: CCDF (RMC) for CAT-C-CAT-F with leader on ILS @ one wind span altitude and follower following SRAP DH=45 m above the ILS with various separation reductions compared to the baseline time separation (150 s)

Table 7 provides the obtained allowed time separation reductions for CAT-C leaders following the ILS and Cat-C, Cat-D, CAT-E and CAT-F followers following a SRAP procedure.

DH [m]/Follower	Cat-C 70 s	Cat-D 70 s	Cat-E 100 s	Cat- F 150 s
0	60	65	100	150
5	50	55	100	150
10	50	50	95	150
15	50	50	60	125
20	50	50	60	120
25	50	50	50	115
30	50	50	50	80
35	50	50	50	80
40	50	50	50	80
45	50	50	50	80
50	50	50	50	70
55	50	50	50	60
60	50	50	50	60
65	50	50	50	50

Table 7: Allowed time separation minima [s] behind Cat-C depending on ΔH value and for various followers

1168 Extension for Cat-A leaders

1169 The time separation minima for Cat-A leader pairs are established applying the same time separation
 1170 reduction as allowed for Cat-B leaders. The results are provided in Table 8.

DH [m]/Follower	Cat-B	Cat-C	Cat-D	Cat-E	Cat-F
0	20	0	0	5	5
5	20	0	0	10	20
10	20	5	5	20	30
15	20	10	10	30	35
20	20	10	10	30	40
25	20	10	10	30	55
30	20	10	10	30	55
35	20	10	10	30	60
40	20	10	10	30	65
45	20	25	25	40	70
50	20	25	25	40	70
55	20	25	25	45	70
60	20	35	35	50	80
65	20	50	50	70	100
70	20	50	50	70	100
75	20	50	50	70	130

1171 Table 8: Allowed time separation reduction [s] behind Cat-A depending on ΔH value and for various
 1172 followers

1173 Extension for Cat-D leaders

1174 The time separation minima for Cat-D-Cat-F pairs are established conservatively using Cat-C LiDAR data
 1175 at 120 baseline separation but with a RMC threshold computed for a Cat-D leader.

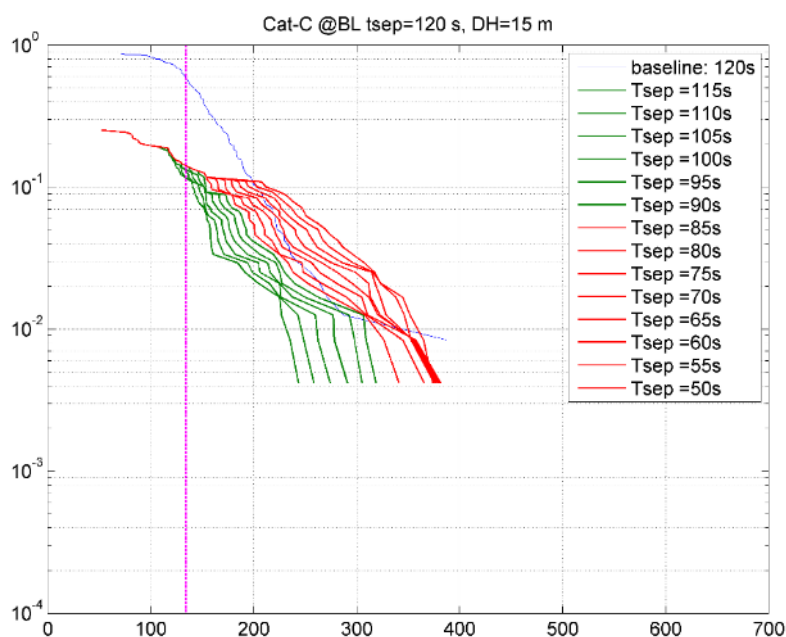


Figure 28: CCDF(RMC) for CAT-C with leader on ILS @ one wind span altitude and follower following SRAP DH=15 m above the ILS with various separation reductions compared to the baseline time separation (120 s) and RMC threshold for Cat-D-Cat-F

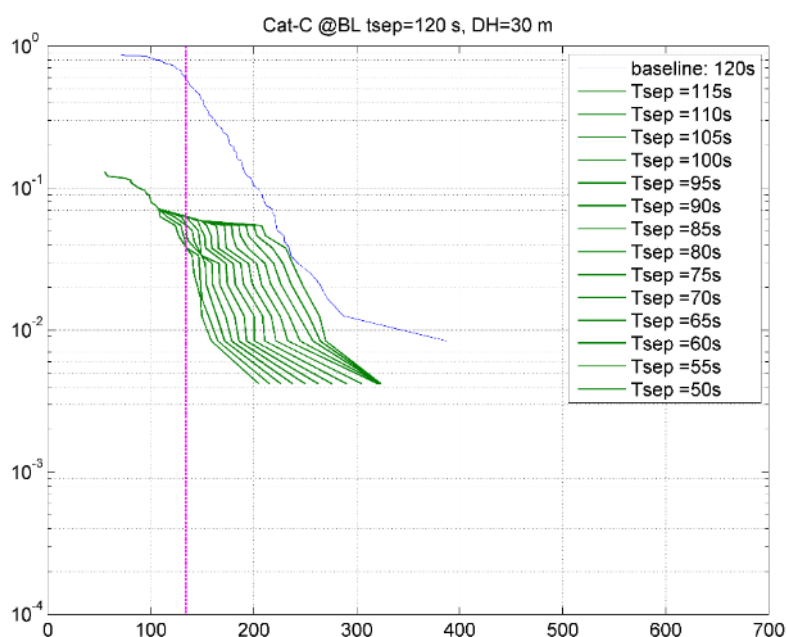


Figure 29: CCDF(RMC) for CAT-C with leader on ILS @ one wind span altitude and follower following SRAP DH=30 m above the ILS with various separation reductions compared to the baseline time separation (120 s) and RMC threshold for Cat-D-Cat-F

The results are provided in Table 9.

DH [m]/Follower	Cat- F
0	120
5	115
10	110
15	90
20	90
25	80
30	50

Table 9: Allowed time separation minima [s] behind Cat-D depending on ΔH value and for Cat-F followers

Extension for Cat-E leaders

The time separation minima for Cat-E-Cat-F pairs are established conservatively using Cat-C LiDAR data at 100 baseline separation but with a RMC threshold computed for a Cat-E leader.

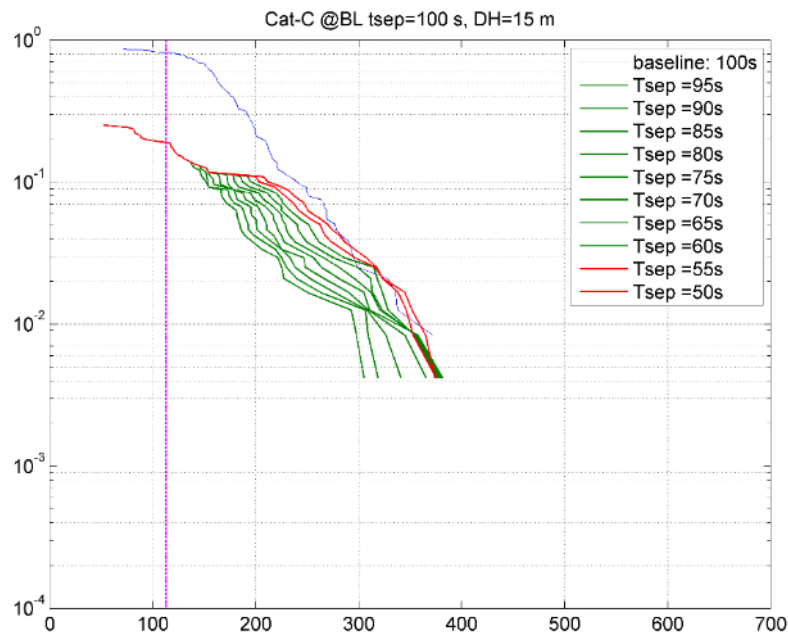


Figure 30: CCDF(RMC) for CAT-C with leader on ILS @ one wind span altitude and follower following SRAP DH=15 m above the ILS with various separation reductions compared to the baseline time separation (100 s) and RMC threshold for Cat-E-Cat-F

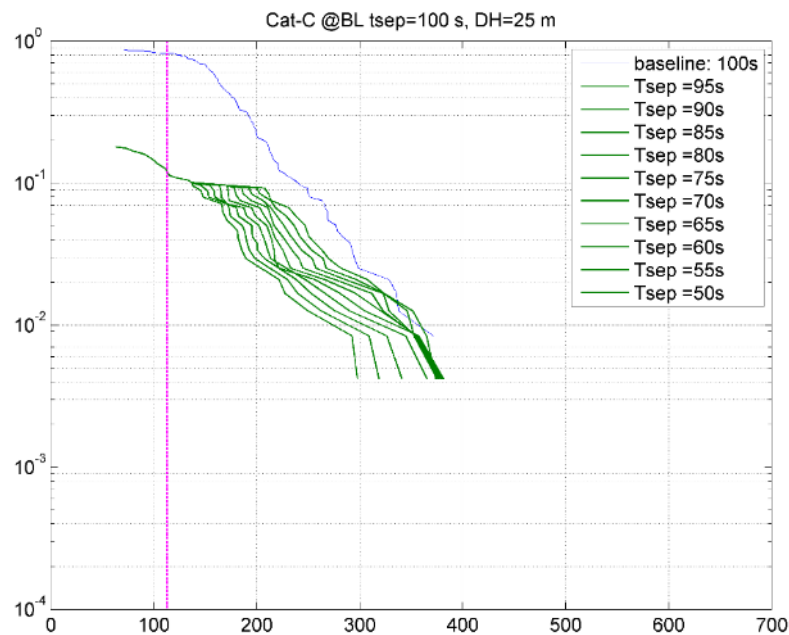


Figure 31: CCDF(RMC) for CAT-C with leader on ILS @ one wind span altitude and follower following SRAP DH=25 m above the ILS with various separation reductions compared to the baseline time separation (100 s) and RMC threshold for Cat-E-Cat-F

The results are provided in Table 10.

DH [m]/Follower	Cat- F
0	100
5	100
10	95
15	60
20	60
25	50

Table 10: Allowed time separation minima [s] behind Cat-E depending on ΔH value and for Cat-F followers

Extension for Cat-F leaders


The time separation minima for Cat-F-Cat-F pairs are established conservatively using Cat-C LiDAR data at 70 s baseline separation but with a RMC threshold computed for a Cat-F leader.

The results are provided in Table 11.

DH [m]/Follower	Cat- F
0	60
5	55
10	50


Table 11: Allowed time separation minima [s] behind Cat-F depending on ΔH value and for Cat-F followers

1206

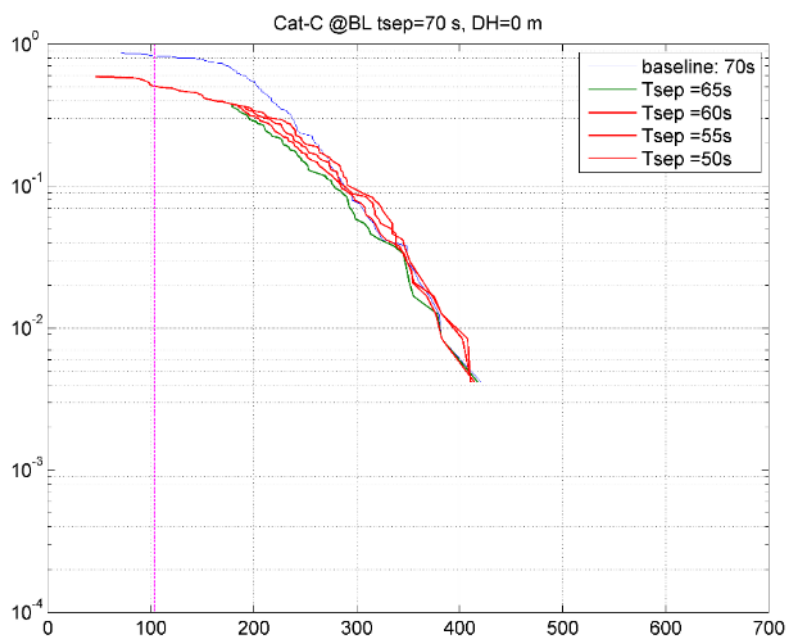

1207

1208 **Figure 32: CCDF(RMC) for CAT-C with leader on ILS @ one wind span altitude and follower following SRAP**
 1209 **DH=5 m above the ILS with various separation reductions compared to the baseline time separation (70 s)**
 1210 **and RMC threshold for Cat-F-Cat-F**

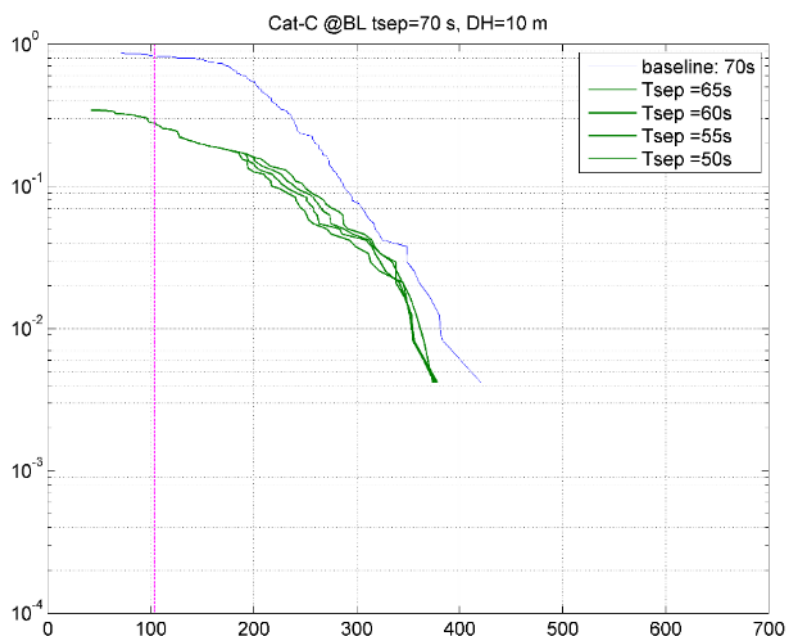

1211

1212 **Figure 33: CCDF(RMC) for CAT-C with leader on ILS @ one wind span altitude and follower following SRAP**
 1213 **DH=10 m above the ILS with various separation reductions compared to the baseline time separation (70 s)**
 1214 **and RMC threshold for Cat-F-Cat-F**

1215 Page | 118

OGE assessment methodology

The second case that is here investigated concerns ILS approach followed by SRAP with a certain altitude difference ΔH and a certain navigation uncertainty providing a certain difference between the two glide altitudes when the leader is above one wing span altitude. This is illustrated in Figure 34.

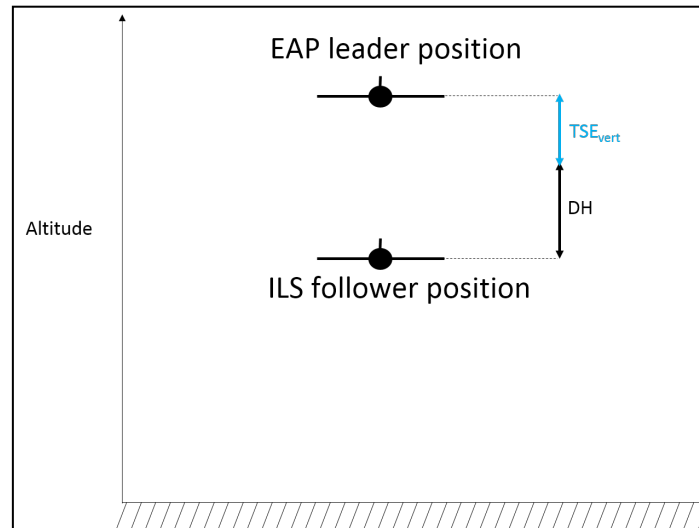


Figure 34: schematic view of ILS and SRAP region of flight for OGE situation

For that situation, vortices generated by the leader on the ILS glide will sink below the glide in a region where the follower could not encounter it, see the illustration in Figure 35.

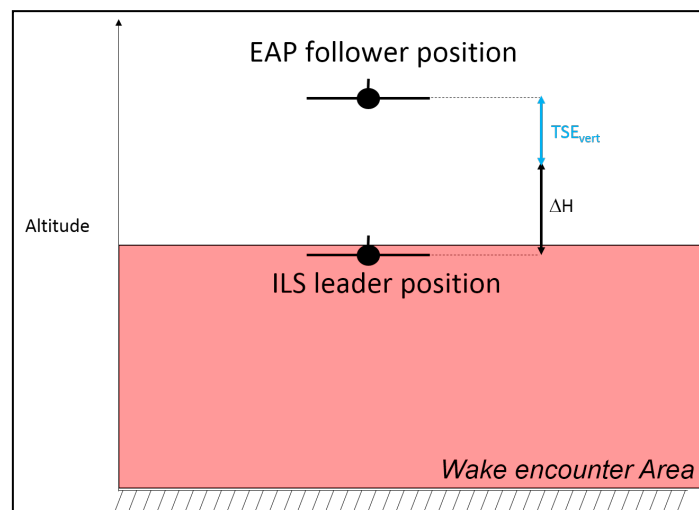


Figure 35: schematic view of the wake vortex encounter area for wake generated on the ILS with a follower on SRAP for OGE situation

The probability to encounter the wake is thus close to zero. This is verified through the analysis of the EGLL-OGE database, see Figure 36 and Figure 37.

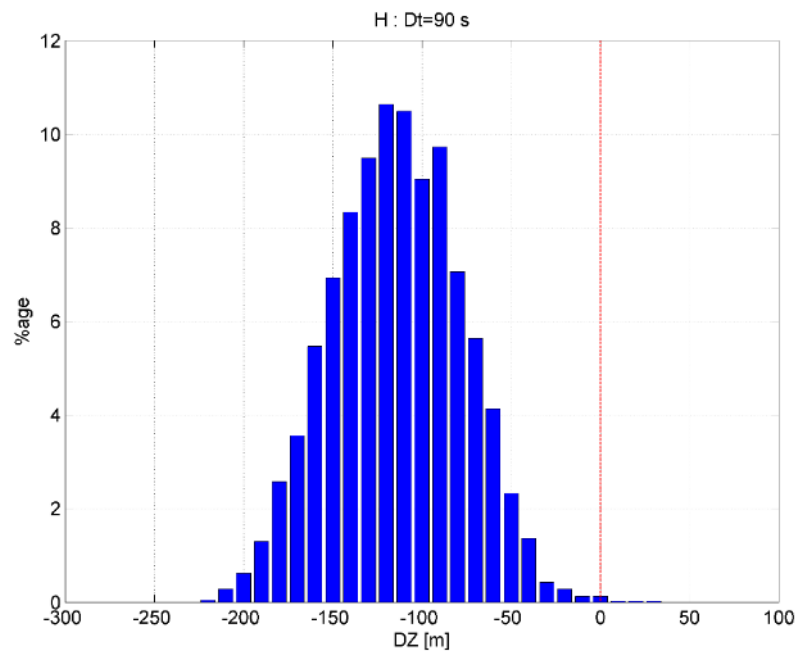


Figure 36: distribution of vortex vertical displacement after 90 s based on EGLL-OGE database

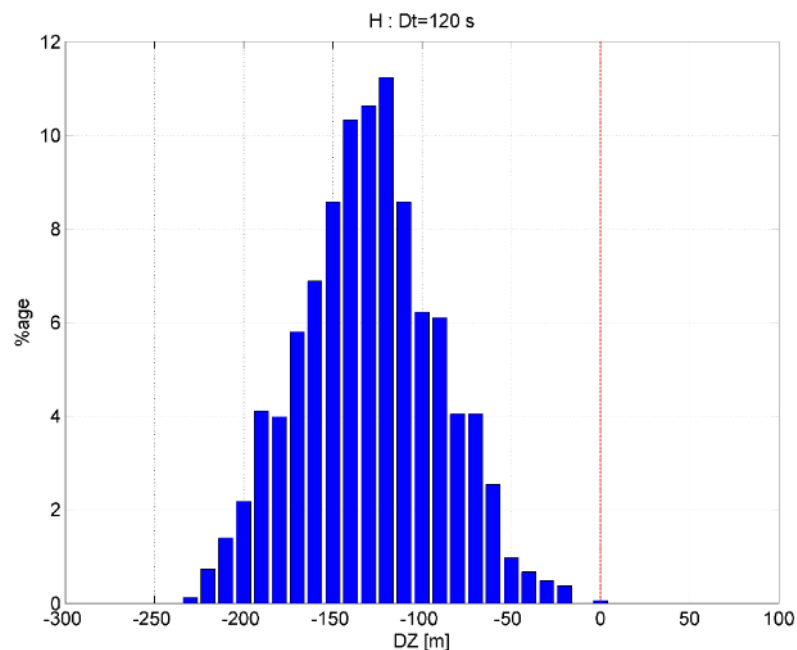


Figure 37: distribution of vortex vertical displacement after 120 s based on EGLL-OGE database

The separation reductions determined in Section C.3.1 ([IGE Results](#)) are therefore also valid for OGE situations.

C.3.2 Wake separation design methodology with leader on SRAP

IGE assessment methodology

The first case that is here investigated concerns SRAP approach followed by ILS with a certain altitude difference ΔH and a certain navigation uncertainty providing a certain difference between the two glide altitudes when the leader is at one wing span altitude. This is illustrated in **Error! Reference source not found..** For wake separation design, the reference altitude of wake generation corresponds to one wingspan generator. We thus here consider vortices generated at one wing span altitude potentially impacting aircraft flying in ILS on a glide located $\Delta H + TSE_{vert}$ below, see the illustration in **Error! Reference source not found..**

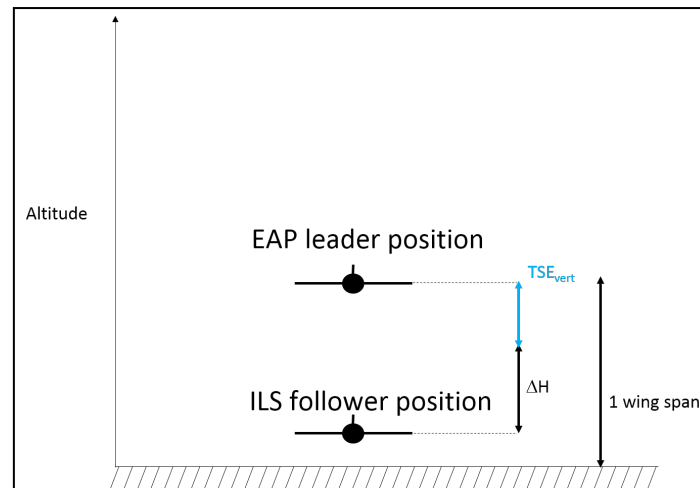


Figure 38: schematic view of SRAP and ILS region of flight

In the plane in which an aircraft is at one wing span altitude when located on the upper glide, an aircraft on the lower conventional glide, is either already on the ground (if the ΔH is sufficient) or at a similar altitude compared to the SRAP if ΔH is small. For that reason, there is no major modification of a wake encounter risk for IGE situation when operating an aircraft on the ILS behind a leader on a SRAP upper glide.

OGE assessment methodology

On the contrary, for the OGE situation, when an aircraft on a lower glide follows an aircraft flying on an upper SRAP glide, the risk of wake encounter significantly increases. Indeed, due to the slow decay of wake vortices evolving OGE and the increased exposure frequency due to the follower being always below the leader all along the glide with wake tending to sink. This is illustrated in Figure 39. For that reason, and whatever the altitude difference between the two glides, the separation minima are increased in order to reduce the severity of those potential encounters.

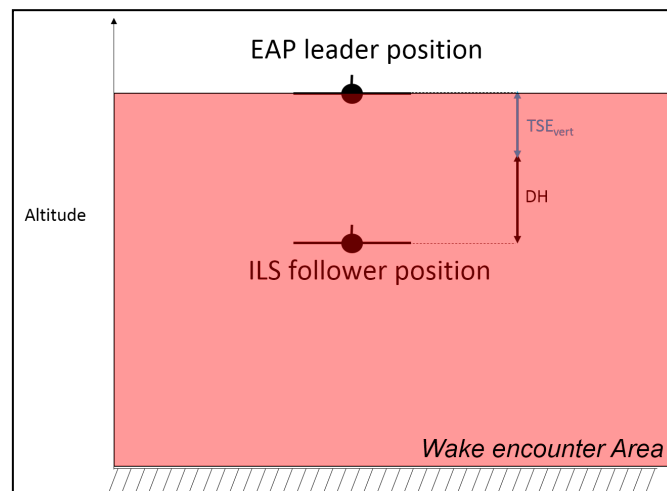


Figure 39: schematic view of SRAP and ILS region of flight

The maximum median severity accepted for wake separation minima is here set to $RMC=0.04$, which represents the absolute maximum acceptable RMC value OGE based on Flight simulator campaign (WISA).

The maximum vortex strength guaranteeing $RMC \leq 0.04$ for any leader and follower at final approach speed is then computed per RECAT-EU category based on RECAT-EU-PWS 96 more frequent aircraft types. The results are provided in Table 12.

Lead/Foll	Cat-A	Cat-B	Cat-C	Cat-D	Cat-E	Cat-F
Cat-A	407	276	207	178	124	109
Cat-B	393	264	193	164	111	91
Cat-C	378	251	178	150	97	71
Cat-D	375	248	175	147	94	67
Cat-E	365	239	165	138	85	56
Cat-F	361	236	161	134	80	52

Table 12: Maximum wake circulation [m^2/s] guaranteeing $RMC \leq 0.04$ for any leader-follower pair of the considered category and with the follower at final approach speed.

The RWC decay of each aircraft category is computed by selecting only long lasting wakes, namely tracks with a lasting time greater or equal to $5 t_0$ (rounded to the next 10 multiple) using t_0 values computed from the median measured initial circulation and assuming a vortex spacing factor $s=\pi/4$ (which is conservative since in the approach configuration, the aircraft will be more inboard loaded leading to smaller, and hence t_0 , values). The used values are reported in Table 13.

	Γ_0 [m ² /s]	b [m]	b ₀ [m]	t ₀ [s]	5 t ₀ criterion [s]
Cat-A	680	80	63	36	180
Cat-B	410	60	47	34	170
Cat-C	325	45	35	24	120
Cat-D	300	34	27	15	80
Cat-E	250	26	20	11	60

Table 13: Vortex initial circulation, spacing and characteristic time per RECAT-EU category

The assessment is performed using EGLL-OGE database for Cat-A, Cat-B and Cat-C leader aircraft types and using CDG database for Cat-D and Cat-E leader aircraft types. The results for Cat-F followers are conservatively copied from Cat-E results.

OGE assessment results

Figure 40 to Figure 44 provide the RWC decay evolution for Cat-A to Cat-E leader aircraft types. The circulation level corresponding to RMC=0.04 for each follower category is also showed. The intersection between the median (i.e. p50) decay evolution and the circulation threshold provides the wake separation time minima for each pair category. The results are provided in Table 14.

Leader/Follower	Cat-A	Cat-B	Cat-C	Cat-D	Cat-E	Cat-F
Cat-A	152	198	235	257	308	325
Cat-B		148	190	210	277	305
Cat-C		88	142	168	239	288
Cat-D			74	89	128	157
Cat-E			53	67	109	144
Cat-F			53	67	109	144

Table 14: Wake time separation minima [s] for operation of leader on an upper glide and follower on a lower glide

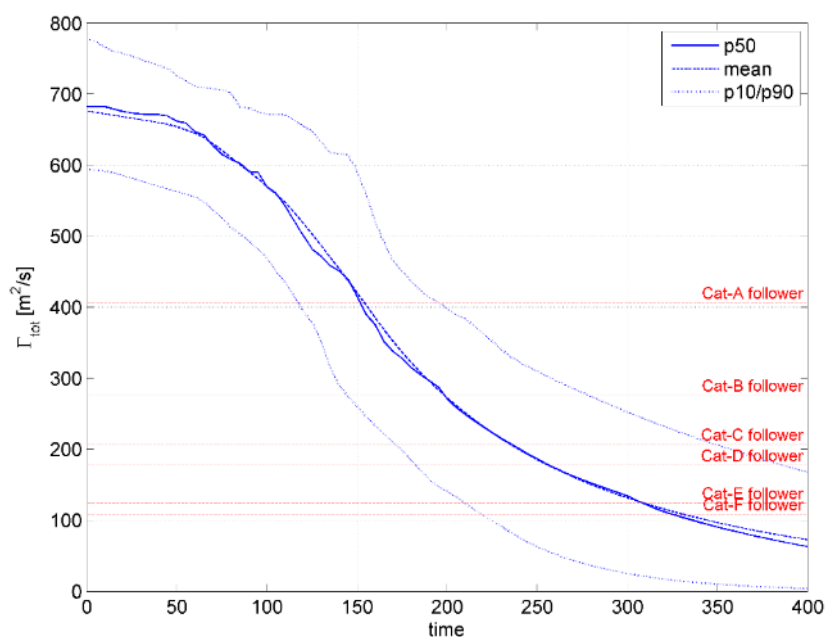


Figure 40: RWC wake decay evolution for Cat-A generated vortices OGE

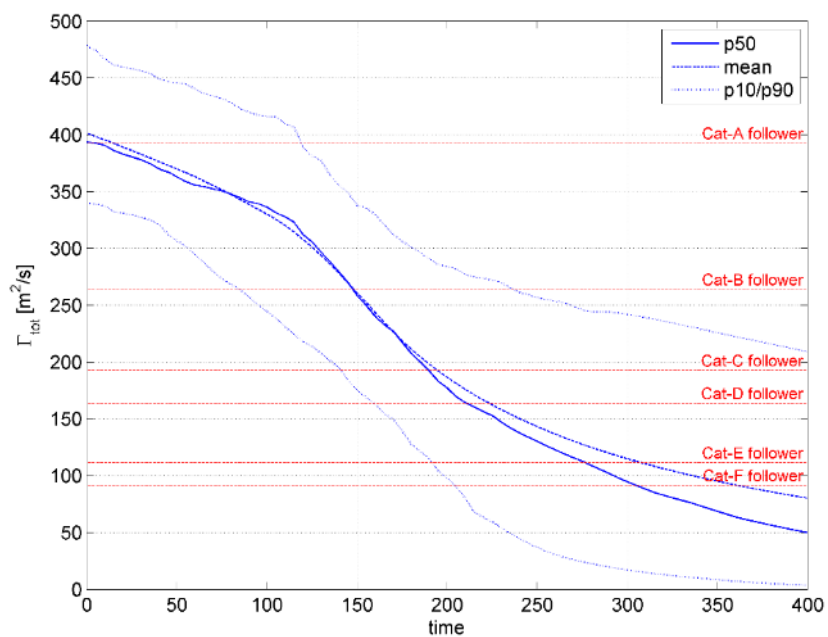


Figure 41: RWC wake decay evolution for Cat-B generated vortices OGE

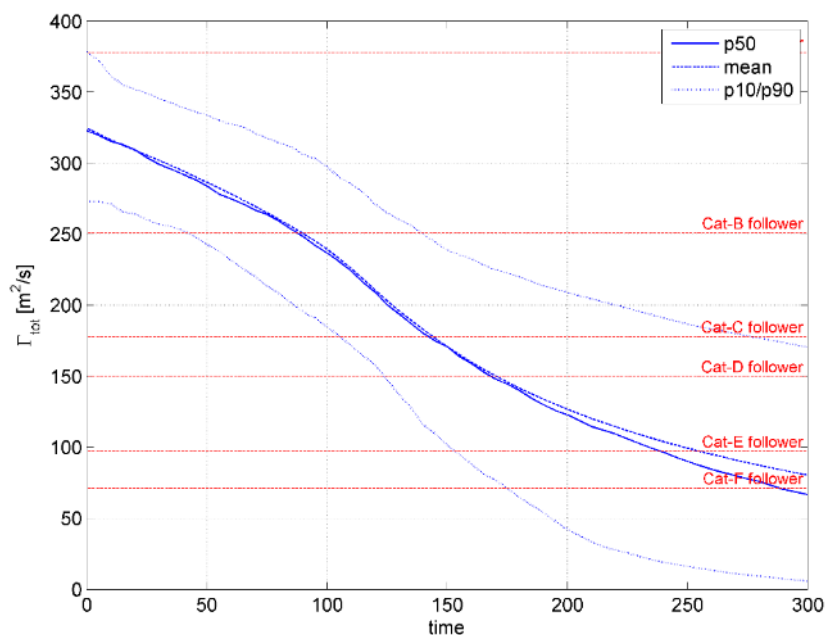


Figure 42: RWC wake decay evolution for Cat-C generated vortices OGE

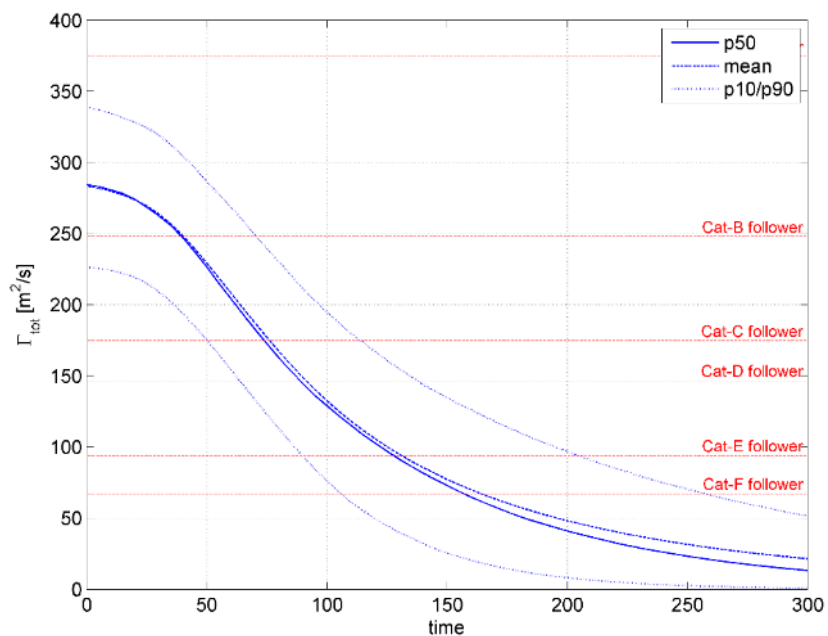


Figure 43: RWC wake decay evolution for Cat-D generated vortices OGE

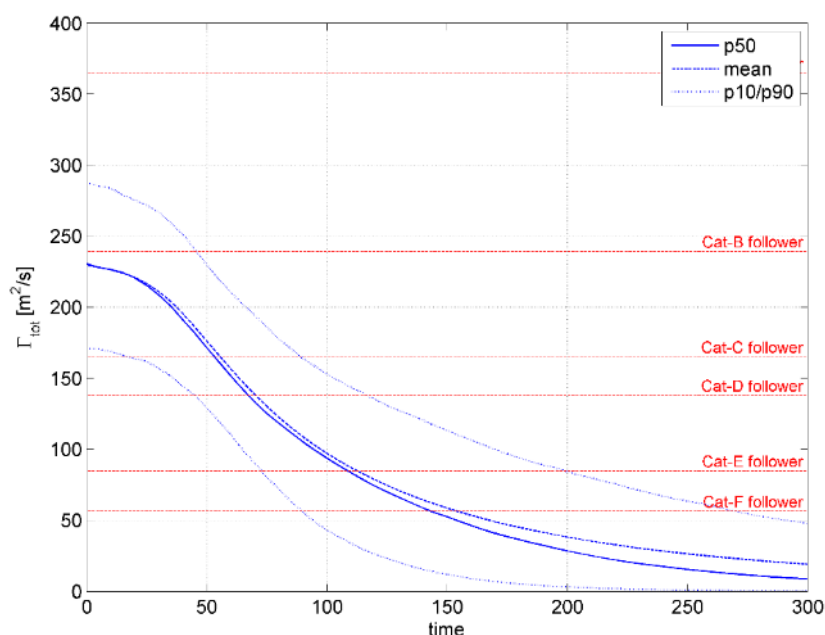


Figure 44: RWC wake decay evolution for Cat-E generated vortices OGE

C.3.3 Wake separation summary

The wake separation minima for SRAP operation in combination with a conventional ILS glide are determined based on the following principle:

- For a pair for which both aircraft follow the same glide (either conventional or SRAP), the wake separation minima are not modified compared to the currently applied separation scheme.
- For a pair for which the leader aircraft follows an upper SRAP glide and the follower follows a lower glide, the wake separation minima are increased.
- For a pair for which the leader aircraft follows a conventional glide and the follower follows an upper glide, the wake separation minima are reduced depending on the glide altitude difference at one wingspan altitude of the conventional glide.

A separation computation tool is provided in **Appendix D**.

The separation minima can be reduced for the leader on conventional glide and the follower on second aiming point depending on the glide altitude difference. For a leader on SRAP followed by a follower on conventional glide, the separation minima are increased due to the altitude difference in OGE region. See **Error! Reference source not found.**

	Follower on ILS	Follower on SRAP
Leader on ILS	Baseline	Separation reduction
Leader on SRAP	Separation increase	Same as baseline

Table 15: Wake separation minima modification for operation of SRAP in combination with conventional ILS procedure

1318 **Appendix D** **SRAP wake separation minima calculator**



EAP_sep_matrix_RE
CAT_v2.1.xlsx

1319

1320

1321

1322

1323

1324

1325

1326

1327

1328

1329

1330

1331

